

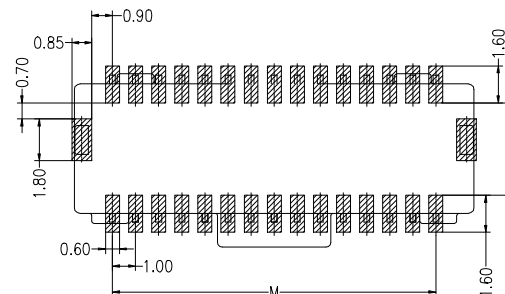
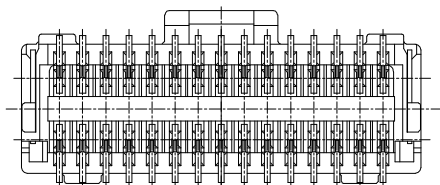



Specifications:
 Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 100M\Omega$
 Rated voltage: 50V AC DC
 Rated current: 0.8A AC DC
 Withstand Voltage: 250V AC/minute
 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
 Materials
 Contact Material: Phosphor Bronze
 Insulation Material: UL94V-0 PA9T
 All materials must meet GREENCONN hazardous substances control standards.

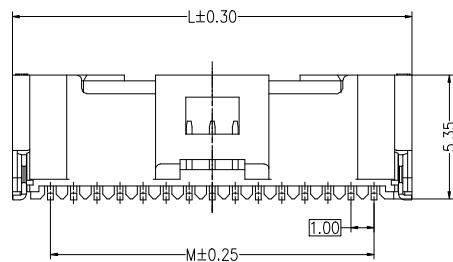

Ordering Information

G WCC205 - XX XX A 001 D X A X

No. of Pins per Row See Table
 Standard Plating Q1=Tin

Color 5=Beige
 Standard Packing D=T&R

Table


No. of PIN/ROW	M	L	L1	L2
10	9.00	12.30	10.45	11.25
15	14.00	17.30	15.45	16.25
20	19.00	22.30	20.45	21.25
25	14.00	27.30	25.45	26.25



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD. ANG PROJ.



GENERAL TOLERANCE

X. ±5.0'	X. ±0.50
.X' ±2.0'	.X ±0.30
.XX' ±1.0'	.XX ±0.20
.XXX' ±/	.XXX ±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWCC205-CA001DA







PART NO.

GWCC205-XXXX A001DXAX

TITLE.

1.00 Pitch
 Wafer 180° SMT

F
E
D
C
B
A

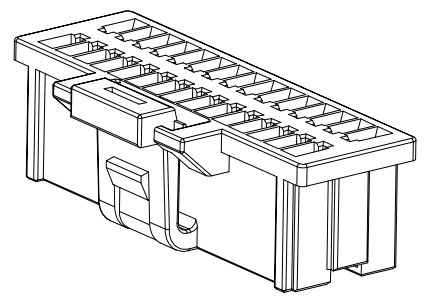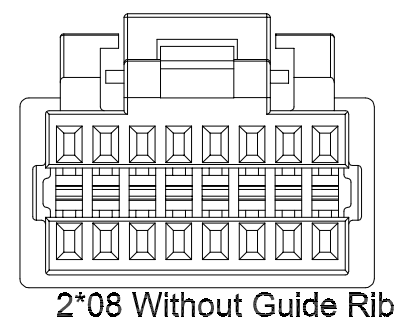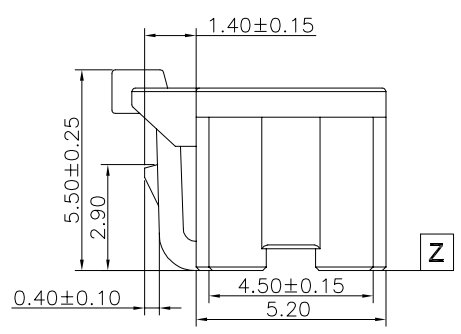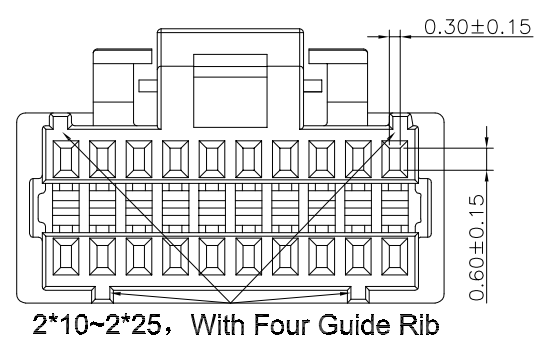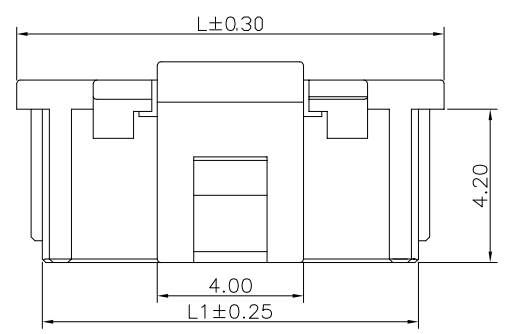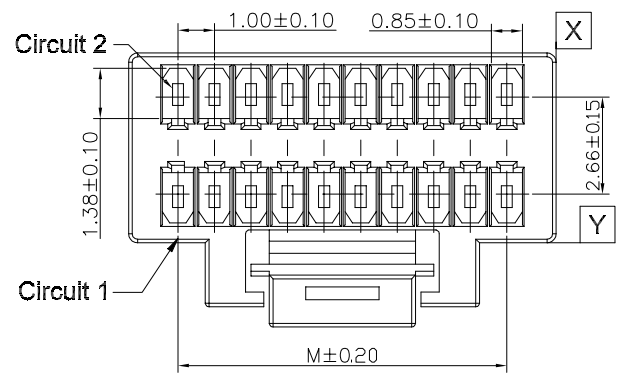

Specifications

Current Rating: 0.8A AC
Current Voltage: 50V AC
Insulation Resistance: $\geq 100M\Omega$
Withstanding Voltage: 250VAC
Contact Resistance: $\leq 20m\Omega$
Operating Temperature: $-25^{\circ}C$ to $+85^{\circ}C$

Materials

Insulator Material: Nylon-66, UL 94V-0
Mating Terminal: GRC120-T1
All materials must meet Greenconn hazardous substances control standards.

No. of Pins/Row	Dimensions Information		
	M	L	L1
10	9.00	11.70	10.30
15	14.00	16.70	15.30
20	19.00	21.70	20.30
25	24.00	26.70	25.30

Ordering Information

GHC242 - XX A XX

No. of Pins Per Row
SEE TABLE


Materials /Color
M=Nylon66/White



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG PROJ.




PAGE. 1/1

GENERAL TOLERANCE	
X.*±5°	X.±0.50
.X*±2°	.X±0.30
.XX*±1°	.XX±0.20
.XXX*±/°	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
GHC242-HA
PART NO.
GHC242-XXAXX

TITLE.
1.00mm PITCH Housing

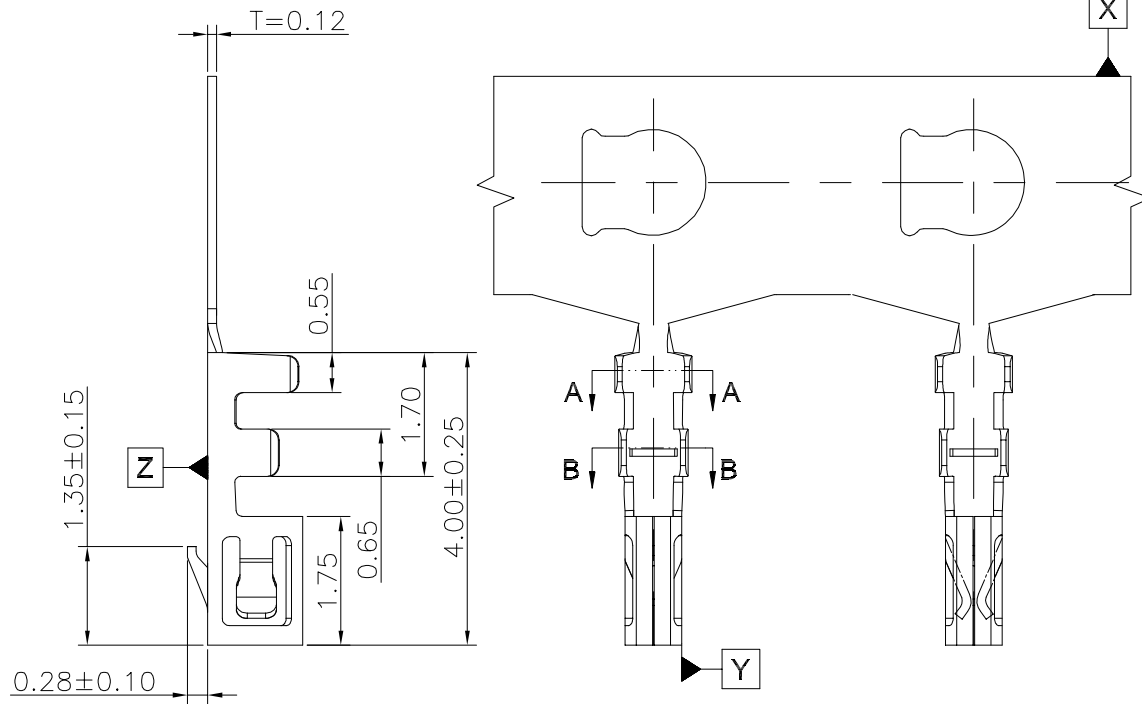

Specifications

Current Rating: 0.8A AC

Current Voltage: 50V AC

Contact Resistance: $\leq 20\text{m}\Omega$

Operating Temperature: -25°C to $+85^{\circ}\text{C}$

Wire Range: AWG28#~32#

Insulation O.D.: 0.80mm (Max)

Materials

Terminal Material: Phosphor Bronze

Mating Housing: GHC242-HA

All materials must meet Greenconn hazardous substances control standards.

SECTION: A-A
SCALE: 1:1

SECTION: B-B
SCALE: 1:1

Ordering Information

GRC120 - 01

XX

XX


Standard Plating
01=Tin

Materials
AB=Phosphor bronze
.....



Website: www.greenconn.com
E-mail: sales@greenconn.com

3RD. ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.* $\pm 5^{\circ}$	X. ± 0.50
.X.* $\pm 2^{\circ}$	.X. ± 0.30
.XX.* $\pm 1^{\circ}$	.XX. ± 0.20
.XXX.* $\pm /$	.XXX. $\pm /$

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GRC120-T1

PART NO.

GRC120-01XXAB

TITLE.

1.00mm PITCH Terminal

REV.	UNIT.	SCALE.
A	mm	1:1