

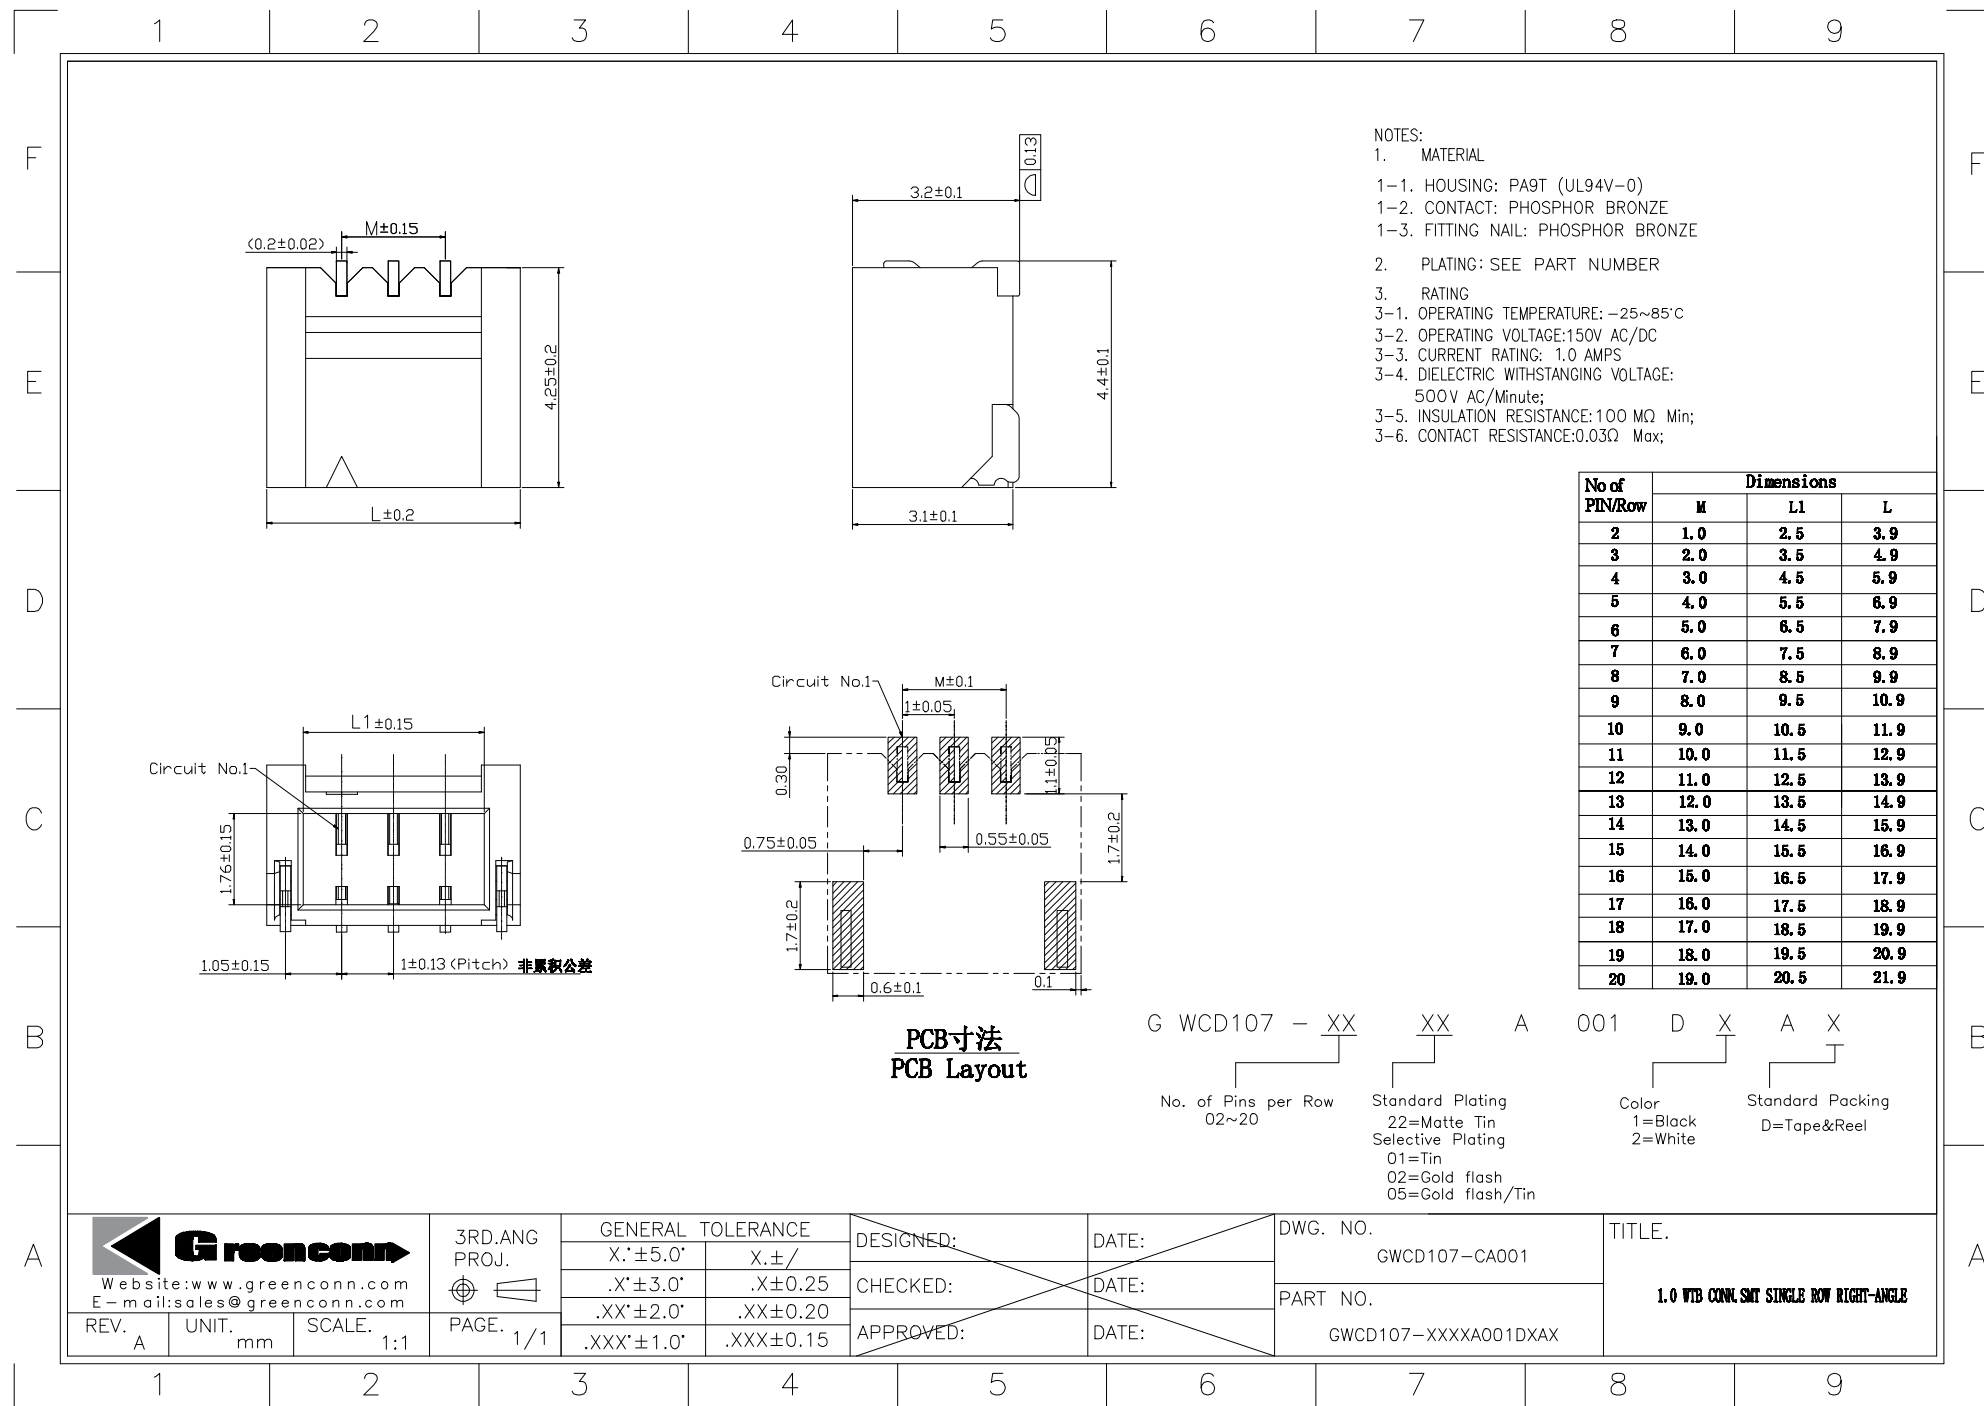



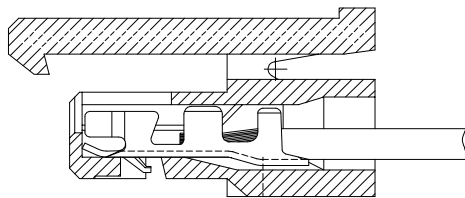


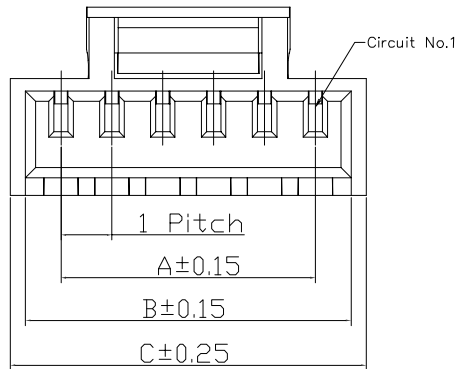



插线状态

NOTES:

1. Insulator Material: PA66 UL 94V-0
2. RATING
 - 2-1. OPERATING TEMPERATURE: -25~85°C
 - 2-2. OPERATING VOLTAGE: 150V AC/DC
 - 2-3. CURRENT RATING: 1.0 AMPS(26#)
 - 2-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
 - 2-5. INSULATION RESISTANCE: 100 MΩ Min;
 - 2-6. CONTACT RESISTANCE: 0.03Ω Max;

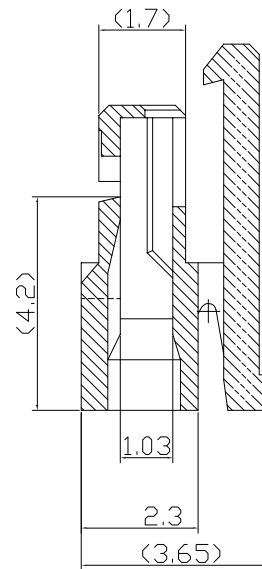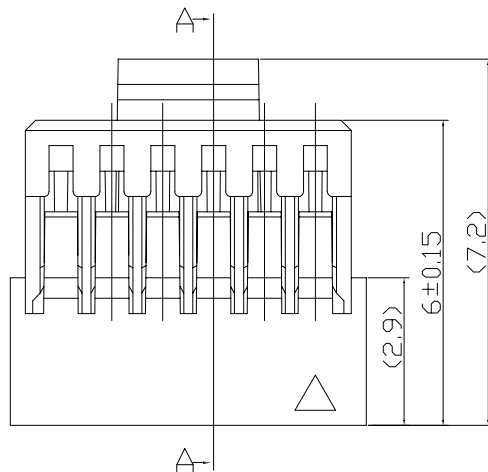

SECTION A-A

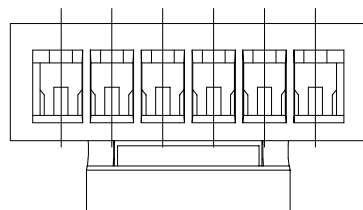

GWC051 - XX

A

X

No. of Pin/Row
02~20


Material/Color

M=Nylon66/White
M1=Nylon66/Black

PIN	A	B	C
2	1.0	2.40	3.00
3	2.0	3.40	4.00
4	3.0	4.40	5.00
5	4.0	5.40	6.00
6	5.0	6.40	7.00
7	6.0	7.40	8.00
8	7.0	8.40	9.00
9	8.0	9.40	10.00
10	9.0	10.40	11.00
11	10.0	11.40	12.00
12	11.0	12.40	13.00
13	12.0	13.40	14.00
14	13.0	14.40	15.00
15	14.0	15.40	16.00
16	15.0	16.40	17.00
17	16.0	17.40	18.00
18	17.0	18.40	19.00
19	18.0	19.40	20.00
20	19.0	20.40	21.00



3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X停 /	.X?.25
.XX停 /	.XX?.20
.XXX停 /	.XXX?. 15

DESIGNED:

DATE:

DWG. NO.

GWC051-HA

TITLE.

CHECKED:

DATE:


PART NO.

GWC051-XXAX


1.0WTB CONN. SINGLE ROW HOUSING

APPROVED:

DATE:

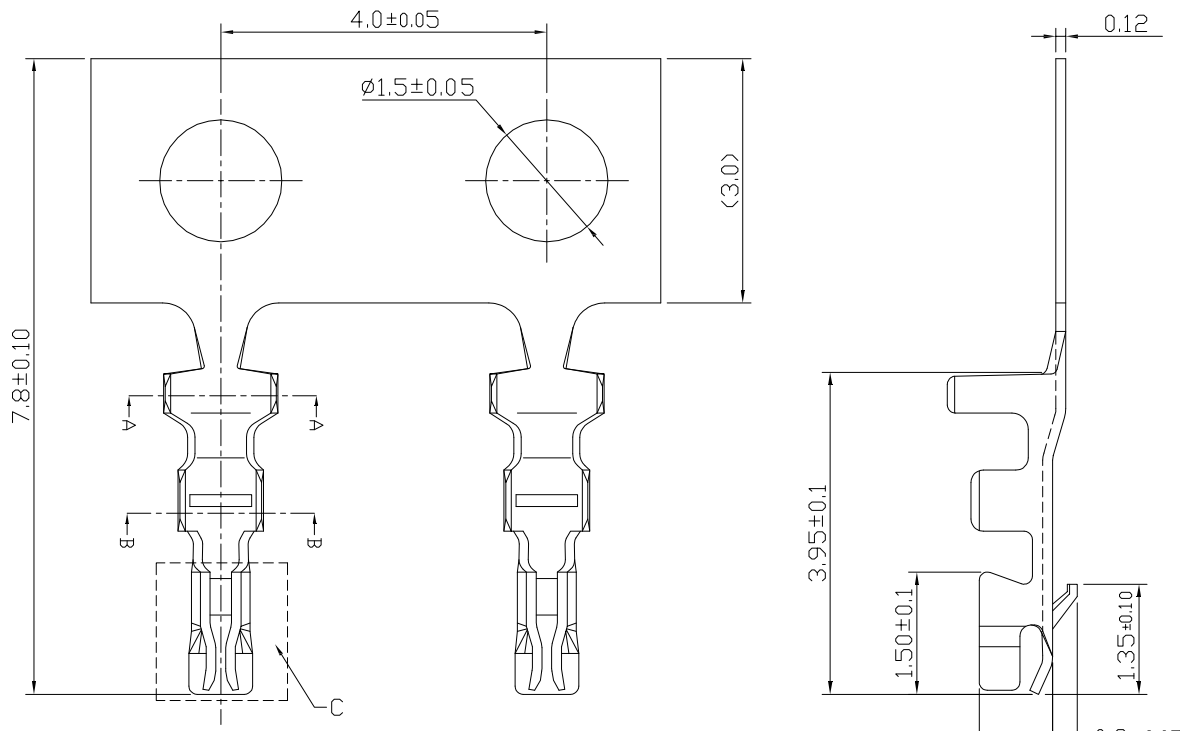

NOTES:
OPERATING TEMPERATURE: $-25 \sim 85^{\circ}\text{C}$
OPERATING VOLTAGE: 150V AC/DC
CURRENT RATING: 1.0 AMPS
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/Minute;
INSULATION RESISTANCE: $100\text{M}\Omega$ Min;
CONTACT RESISTANCE: 0.03Ω Max;

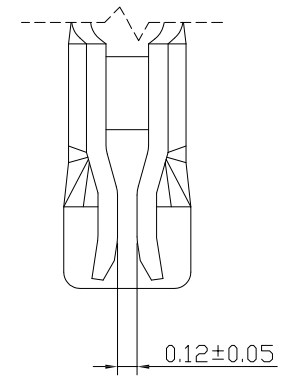

DETAIL: C SCALE 2: 1

Ordering Information

GRC114 - 01 XX AB

Standard Plating
01=Tin
02=Gold flash

Materials
AB=Phosphor Bronze



3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.停 /	X.?
.X停 /	.X?.25
.XX停 /	.XX?.20
.XXX停 /	.XXX?. 15

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
GRC114-T1
PART NO.
GRC114-01 XX AB

TITLE.
1.0 WTb CONN.PLUG CRIMP TERMINAL