

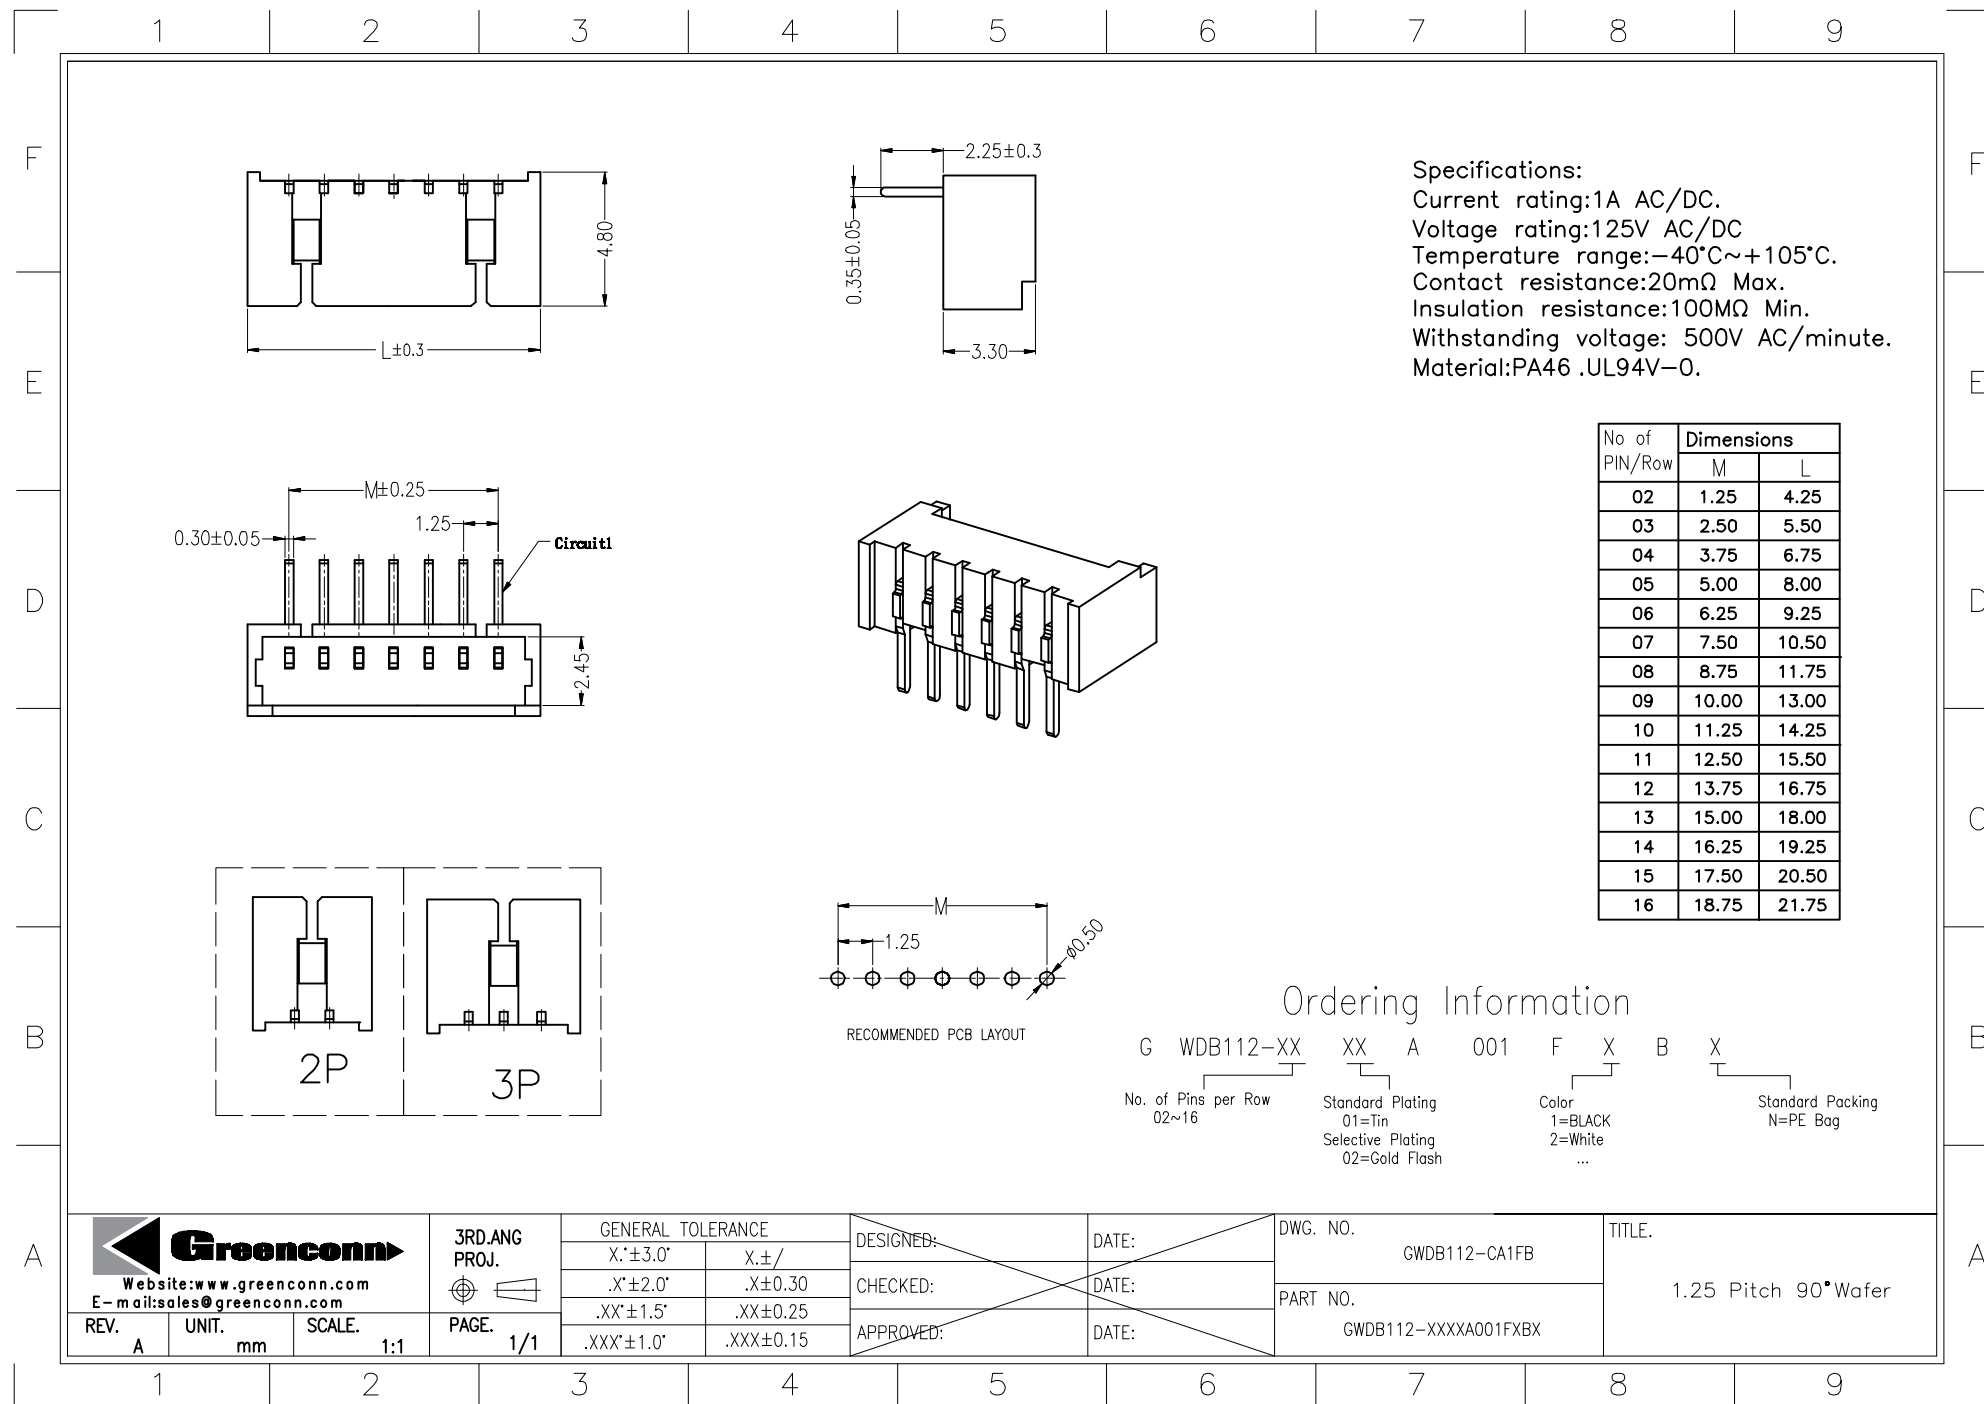



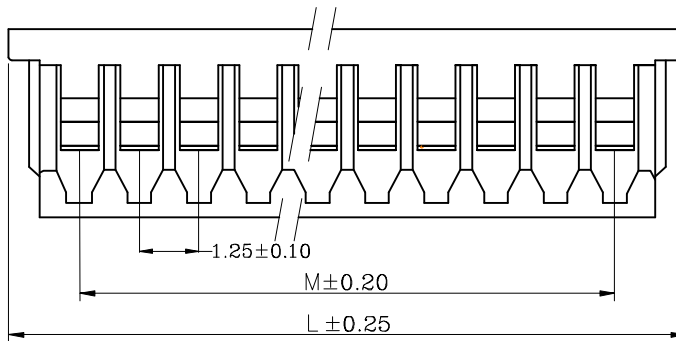

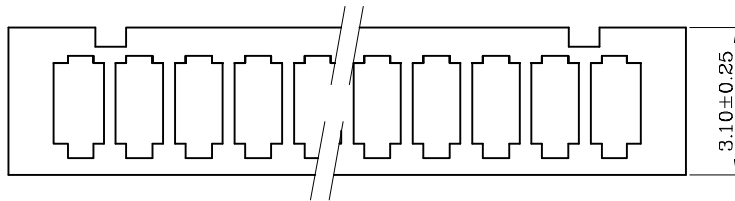

NOTES:

CURRENT RATING:1A AC/DC.
VOLTAGE RATING:125V AC/DC
TEMPERATURE RANGE:-40°C~+105°C.
CONTACT RESISTANCE:20MΩ Max.
INSULATION RESISTANCE:100MΩ Min.
WITHSTANDING VOLTAGE:500V AC/MINUTE.
MATERIAL:NYLON 66.UL94V-0.

No of Pin/Row	Dimensions	
	M	L
02	1.25	4.25
03	2.50	5.50
04	3.75	6.75
05	5.00	8.00
06	6.25	9.25
07	7.50	10.50
08	8.75	11.75
09	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50
16	18.75	21.75

GHD321 - XX A X

No. of Pin/Row
02 ~ 16


Material/Color
M=Nylon66/White



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0*	X.±
.X*±3.0*	.X±0.30
.XX*±2.0*	.XX±0.25
.XXX*±1.0*	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GHD321-HA

PART NO.

GHD321-XXAX

TITLE.

1.25mm pitch housing

