

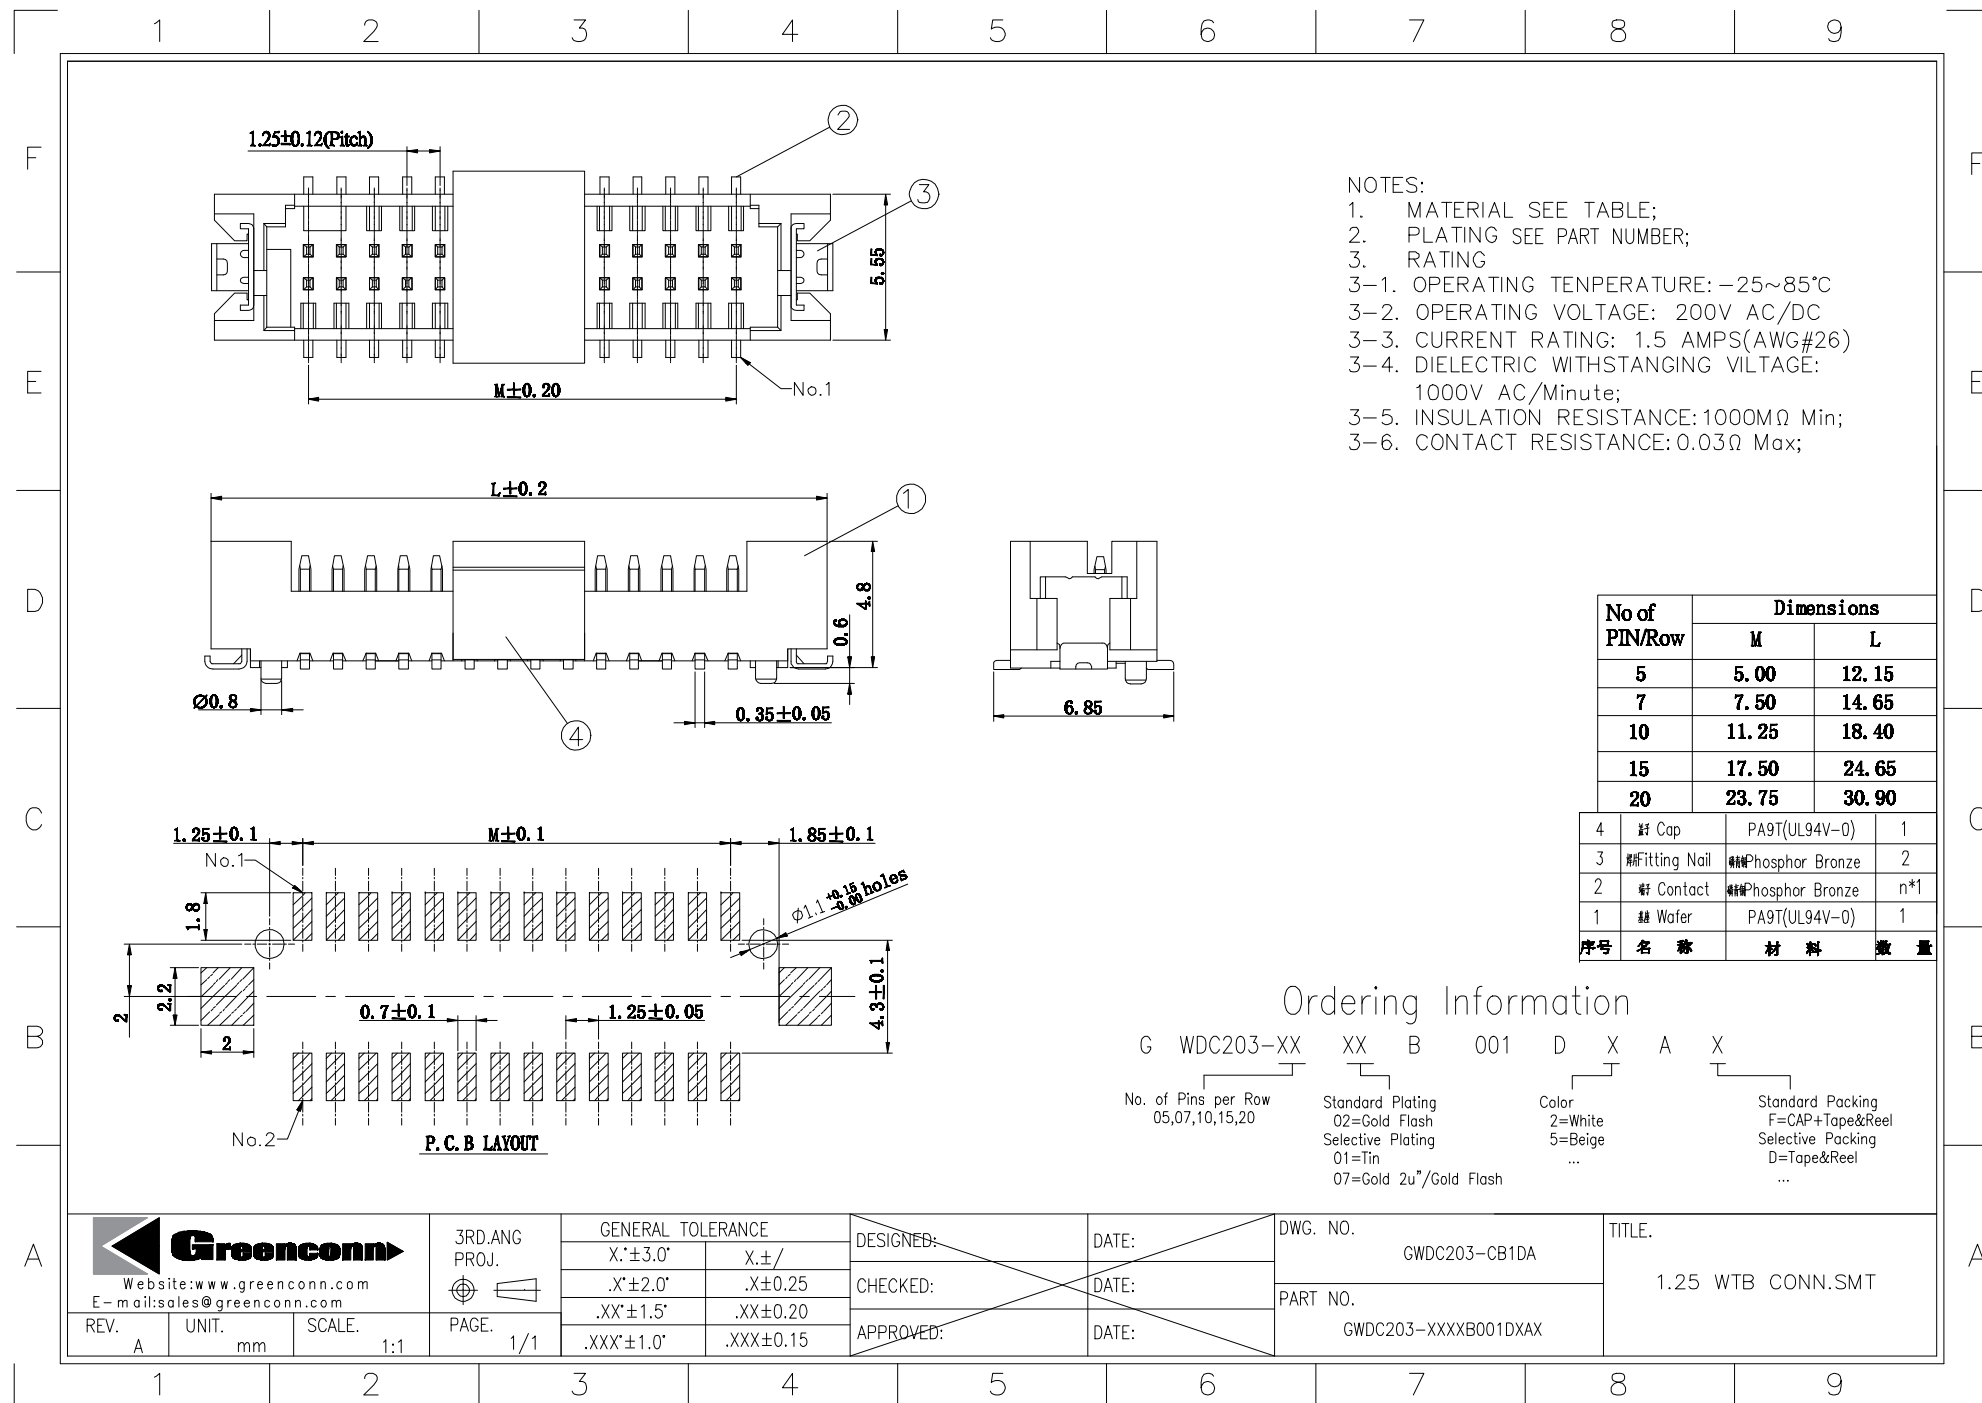

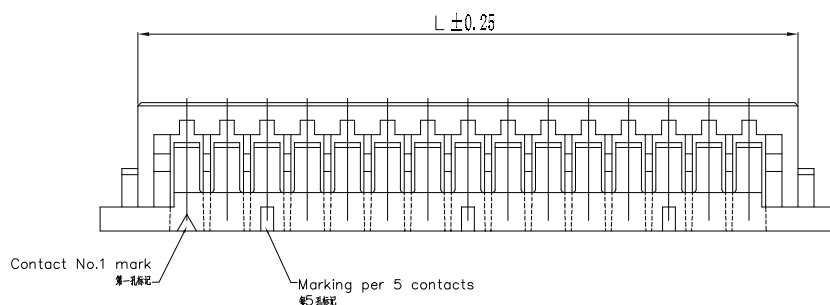
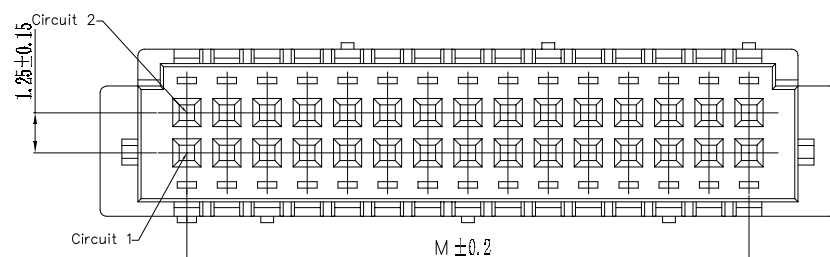


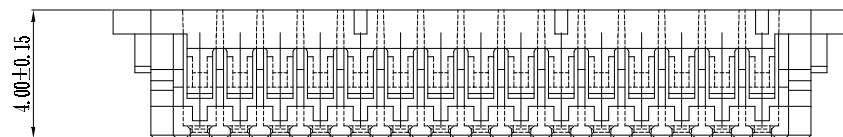

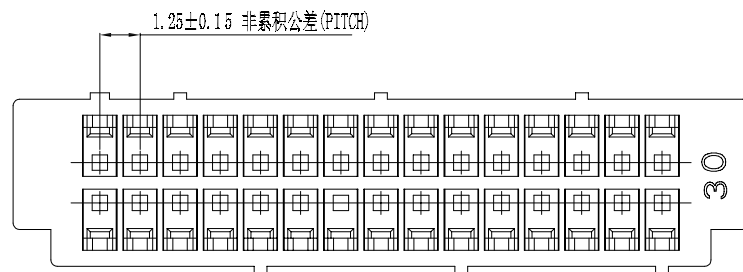

RATING
 OPERATING TEMPERATURE: -25~85°C
 OPERATING VOLTAGE: 200V AC/DC
 CURRENT RATING: 1.5 AMPS(AWG#26)
 DIELECTRIC WITHSTANDING VOLTAGE:
 1000V AC/Minute;
 INSULATION RESISTANCE: 1000MΩ Min;
 CONTACT RESISTANCE: 0.03Ω Max;

Materials
 Insulator Material: PA66 UL 94V-0

NO OF PINS/ROW	Dimensions (mm)	
	M	L
5	5.00	8.05
7	7.50	10.55
10	11.25	14.30
15	17.50	20.55
20	23.75	26.80

GWD022 - XX A X
 No. of Pin/Row SEE TABLE
 Material/Color
 M=Nylon66/White
 M1=Nylon66/Black



REV. A UNIT. mm SCALE. 1:1

3RD.ANG PROJ.
 PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X.停 /	.X?.25
.XX.停 /	.XX?.20
.XXX.停 /	.XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWD022-HA

PART NO.

GWD022-XXAX

TITLE.

1.25 WTB CONN. DOUBLE ROW HOUSING

F

E

D

C

B

A

F






E

D

C

B

A

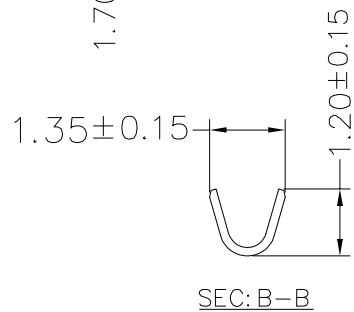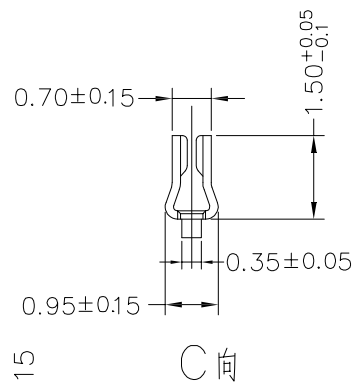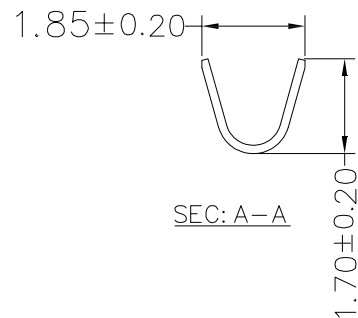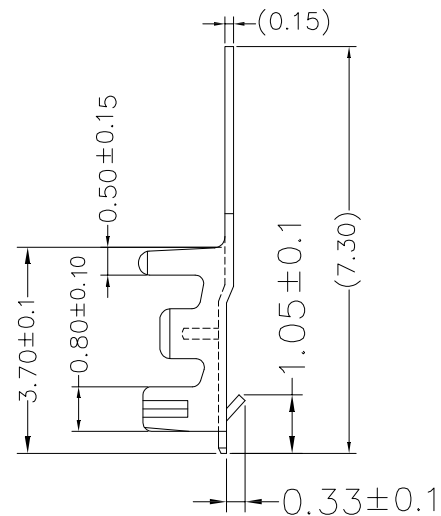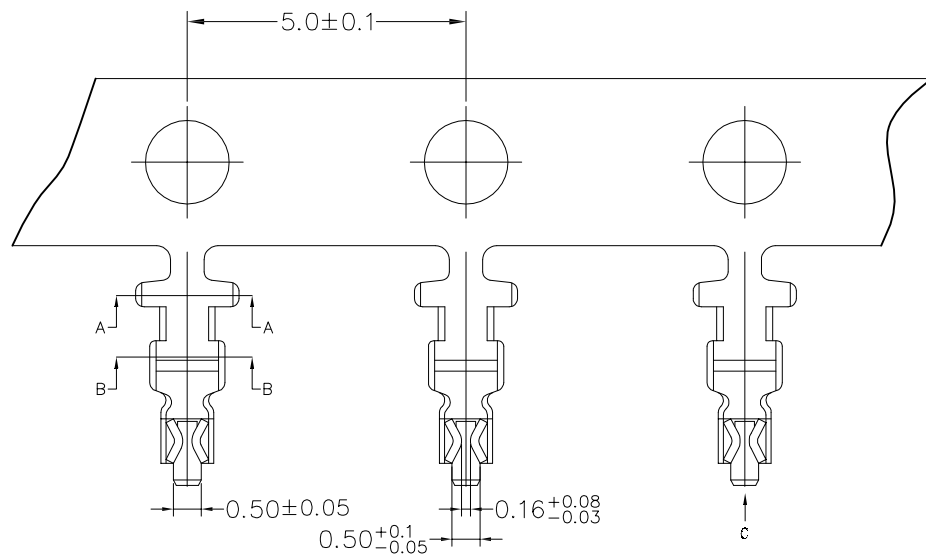

RATING

OPERATING TEMPERATURE: -25~85°C
OPERATING VOLTAGE: 200V AC/DC
CURRENT RATING: 1.5 AMPS(AWG#26)
DIELECTRIC WITHSTANDING VOLTAGE:
1000V AC/Minute;
INSULATION RESISTANCE: 1000MΩ Min;
CONTACT RESISTANCE: 0.03Ω Max;

Ordering Information


GRD115 - 01

XX

AB

Standard Plating
01=Tin
02=Gold flash

Materials
AB=Phosphor Bronze

3RD.ANG
PROJ.

PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X停 /	.X?.25
.XX停 /	.XX?.20
.XXX停 /	.XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GRD115-T1

PART NO.

GRD115-01 XX AB

TITLE.

1.25 WTB CONN.PLUG CRIMP TERMINAL

Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1