


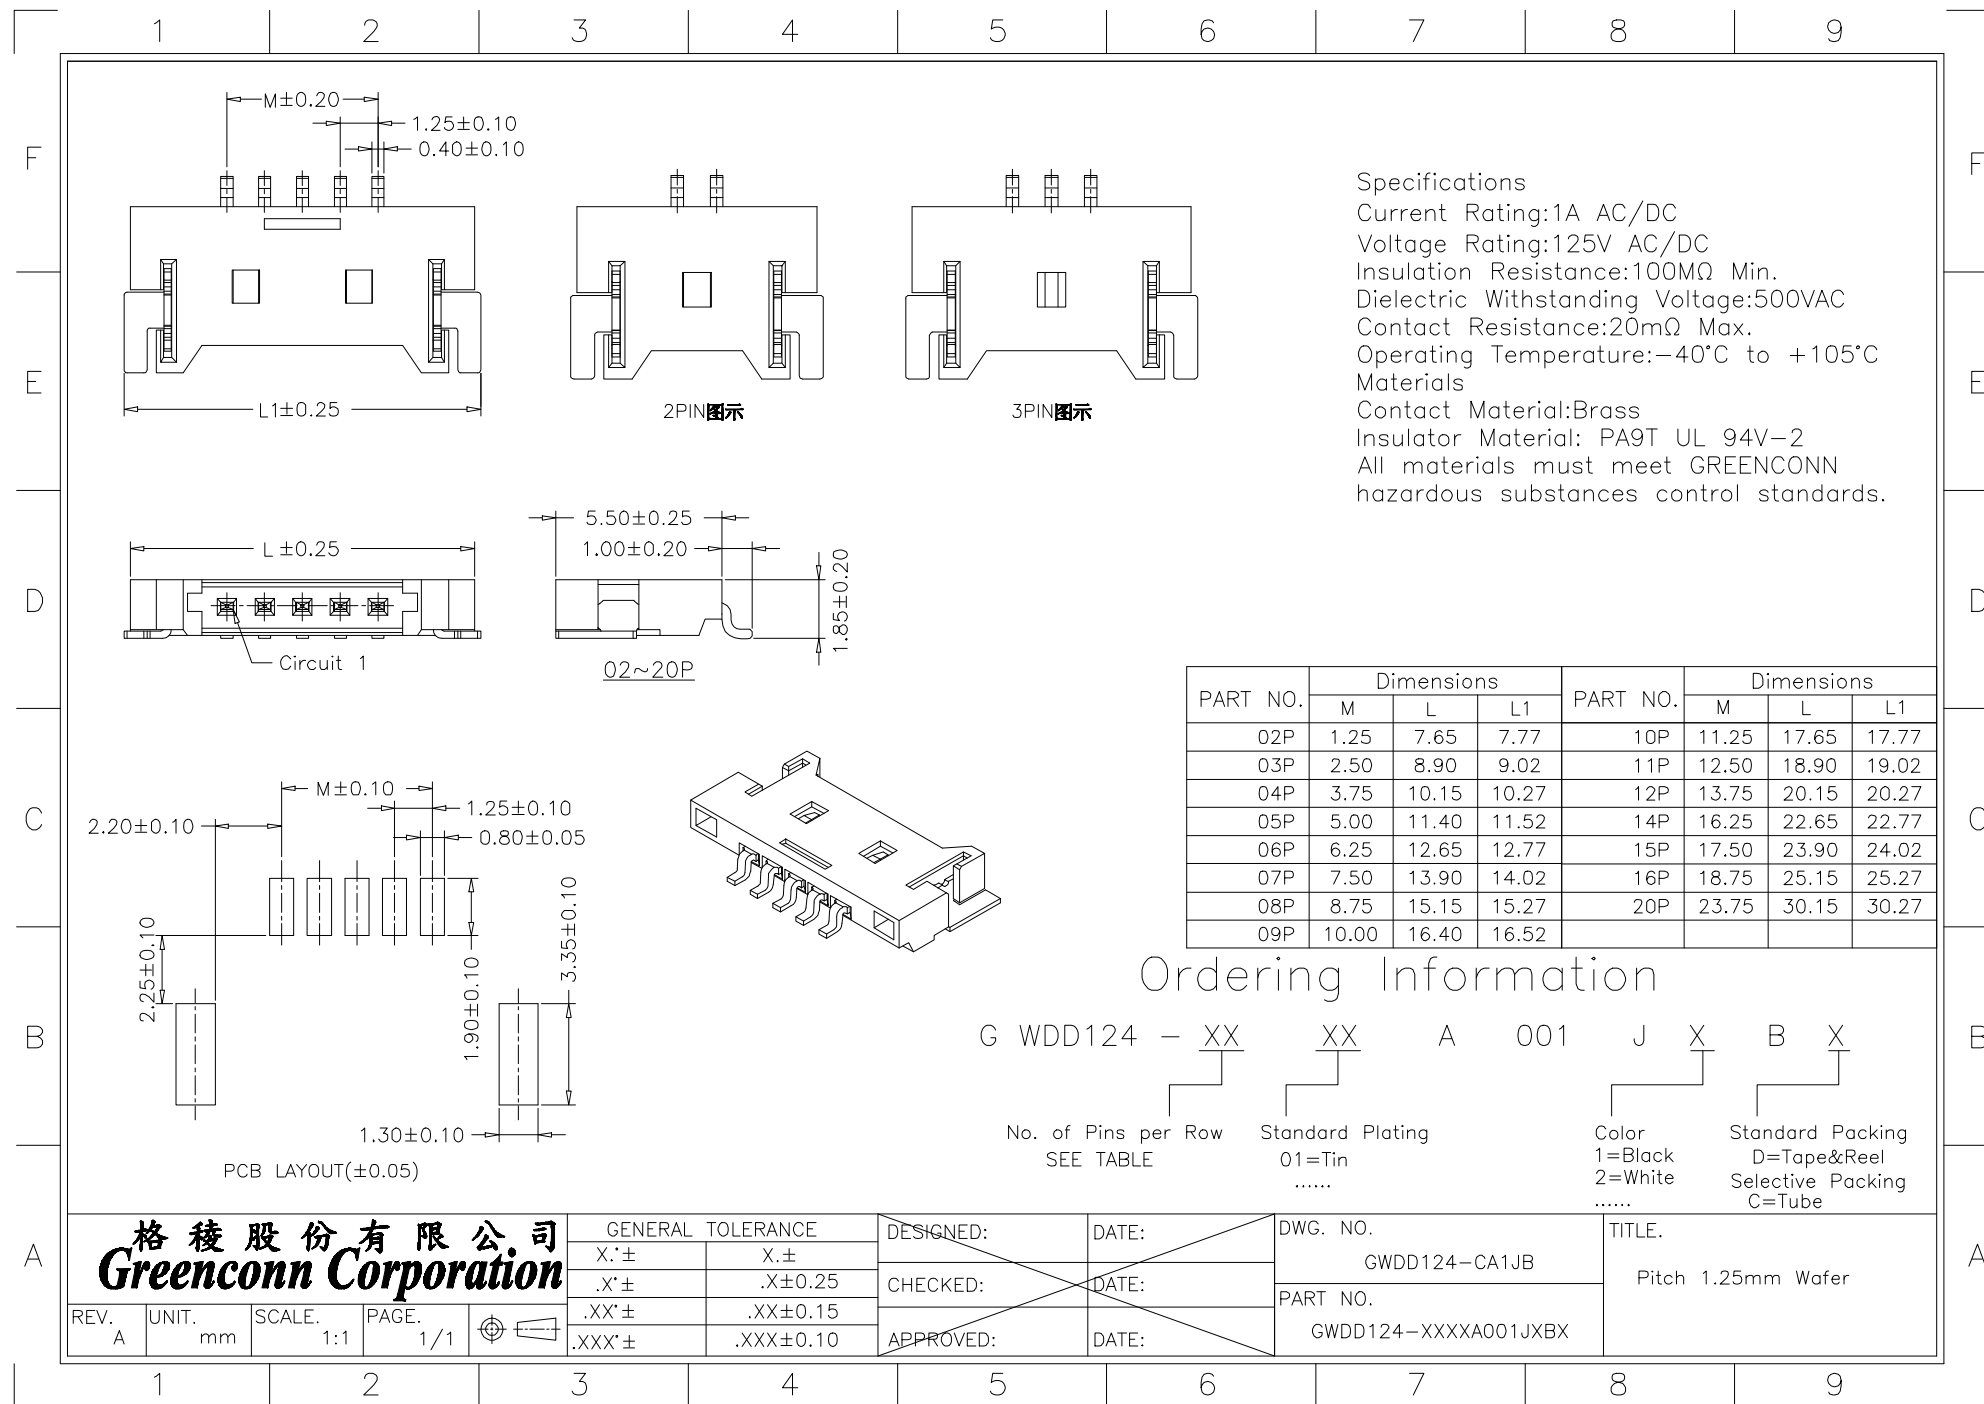
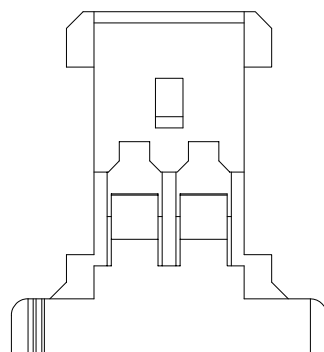
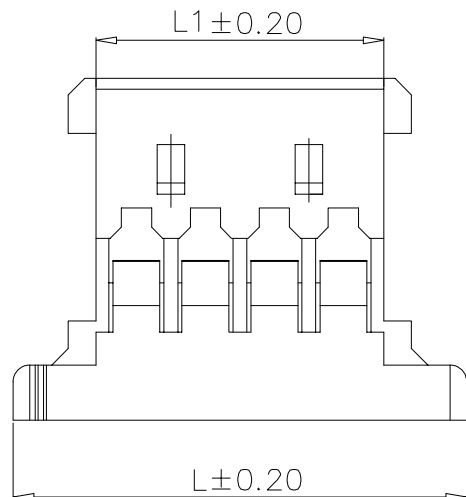


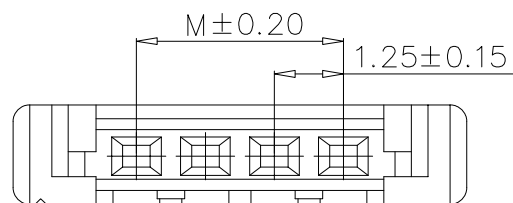

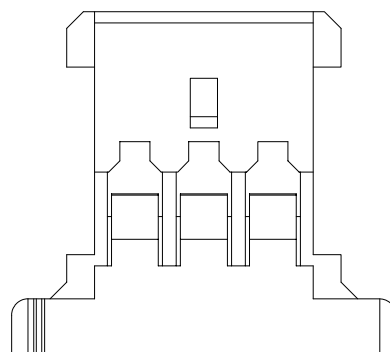

2PIN 图示

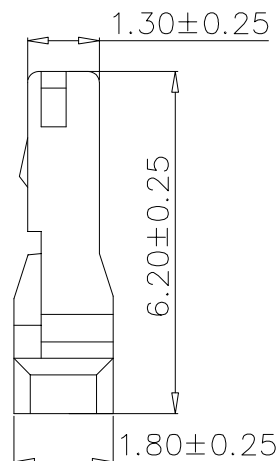

3PIN 图示

Specifications

Voltage Rating:125V AC/DC

Current Rating:1A AC/DC

Withstanding Volatge:500V AC/minute

Operating Temperature:-40℃ to +105℃

Insulation Resistance:100MΩ Min.

Contact Resistance:20mΩ Max.

Insulator Material: PA66 UL94V-0

TABLE:

No. of Pin/Row	DIMENSION		
	M	L1	L
02	1.25	2.72	5.72
03	2.50	3.97	6.97
04	3.75	5.22	8.22
05	5.00	6.47	9.47
06	6.25	7.72	10.72
07	7.50	8.97	11.97
08	8.75	10.22	13.22
09	10.00	11.47	14.47
10	11.25	12.72	15.72
11	12.50	13.97	16.97
12	13.75	15.22	18.22
13	15.00	16.47	19.47
14	16.25	17.72	20.72
15	17.50	18.97	21.97
16	18.75	20.22	23.22
18	21.25	22.72	25.72
20	23.75	25.22	28.22
22	26.25	27.72	30.72
24	28.75	30.22	33.22
26	31.25	32.72	35.72
28	33.75	35.22	38.22
30	36.25	37.72	40.72

GWD121 - XX

A

X

No. of Pin/Row
SEE TABLE

Material/Color
M=Nylon66/White
M1=Nylon66/Black



3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X停 /	.X?.25
.XX停 /	.XX?.20
.XXX停 /	.XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWD121-HA

PART NO.

GWD121-XXAX

TITLE.

1.25mm Pitch Housing

F

E

D

C

B

A

F






E

D

C

B

A

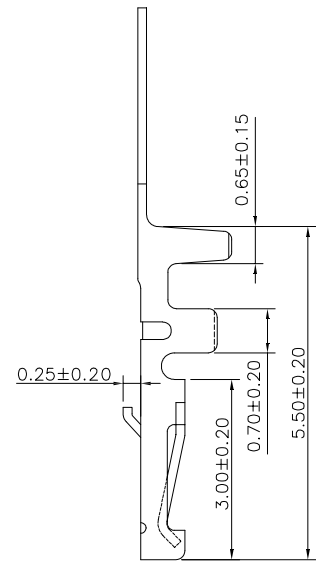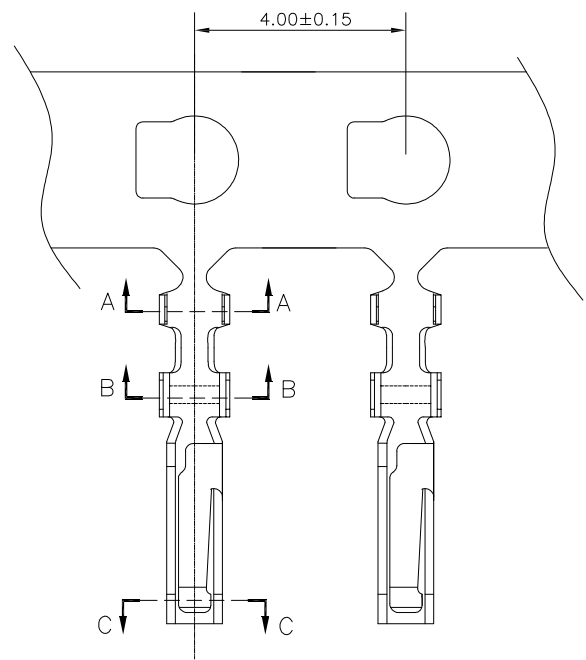

Note:
Material:PHOSPHOR BRONZE
Wire Range:AWG#28-32
Insulation O.D.:1.2mm(Max)

Ordering Information


GRD114 - 01 XX AB

Standard Plating
01=Tin
02=Gold Flash

Materials
AB=Phosphor bronze


Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A	UNIT. mm	SCALE. 1:1
--------	----------	------------

3RD.ANG PROJ.

PAGE. 1/1

GENERAL TOLERANCE	
X.停 /	X.?
.X停 /	.X?.30
.XX停 /	.XX?.20
.XXX停 /	.XXX?. 15

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. GRD114-T1
PART NO. GRD114-01 XX AB

TITLE. 1.25mm Pitch Terminal
