

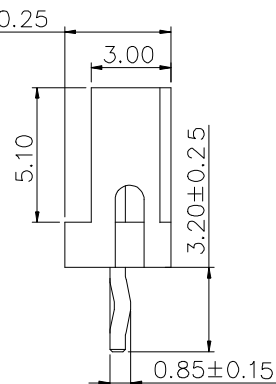


2P 专用


Specifications:
 Current rating: 4A AC/DC.
 Voltage rating: 125V AC/DC
 Temperature range: -40°C~+105°C.
 Contact resistance: 10mΩ Max.
 Insulation resistance: 1000MΩ Min.
 Withstanding voltage: 1000V AC/minute.
 Material:
 Housing: PA66 UL94V-0
 Contact: Copper Alloy

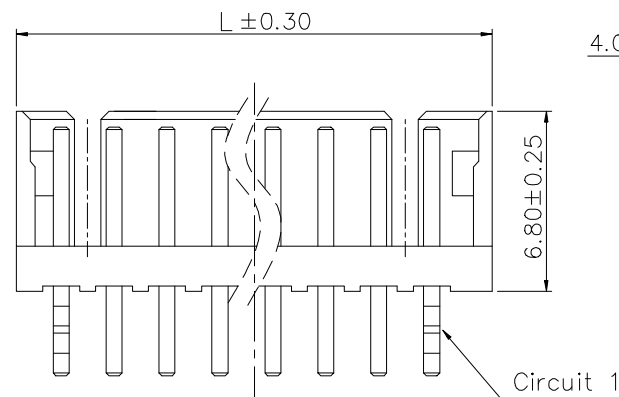

2P 专用

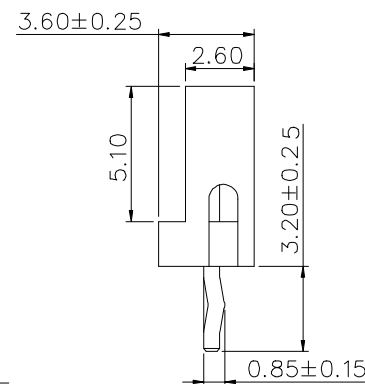

No. of PIN/ROW	Dimensions	
	M	L
02	2.00	5.96
03	4.00	7.95
04	6.00	9.96
05	8.00	11.96
06	10.00	13.96
07	12.00	15.96
08	14.00	17.96
09	16.00	19.96
10	18.00	21.96
11	20.00	23.96
12	22.00	25.96
13	24.00	27.96
14	26.00	29.96
15	28.00	31.96



Recommended P.C.B Layout
 (Tolerance=±0.05)

Ordering Information

G WFA102 - XX XX A 014 E X B X

No. of Pins per Row
02~15

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
22=Matte Tin

Color
1=Black
2=White


Standard Packing
N=PE Bag
Selective Packing
C=Tube



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
PROJ.



GENERAL TOLERANCE

X.±5.0'	X.±/
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.


GWFA102-CA014




PART NO.

GWFA102-XXXXA014EXBX


TITLE.

PITCH 2.0mm 180' WAFER

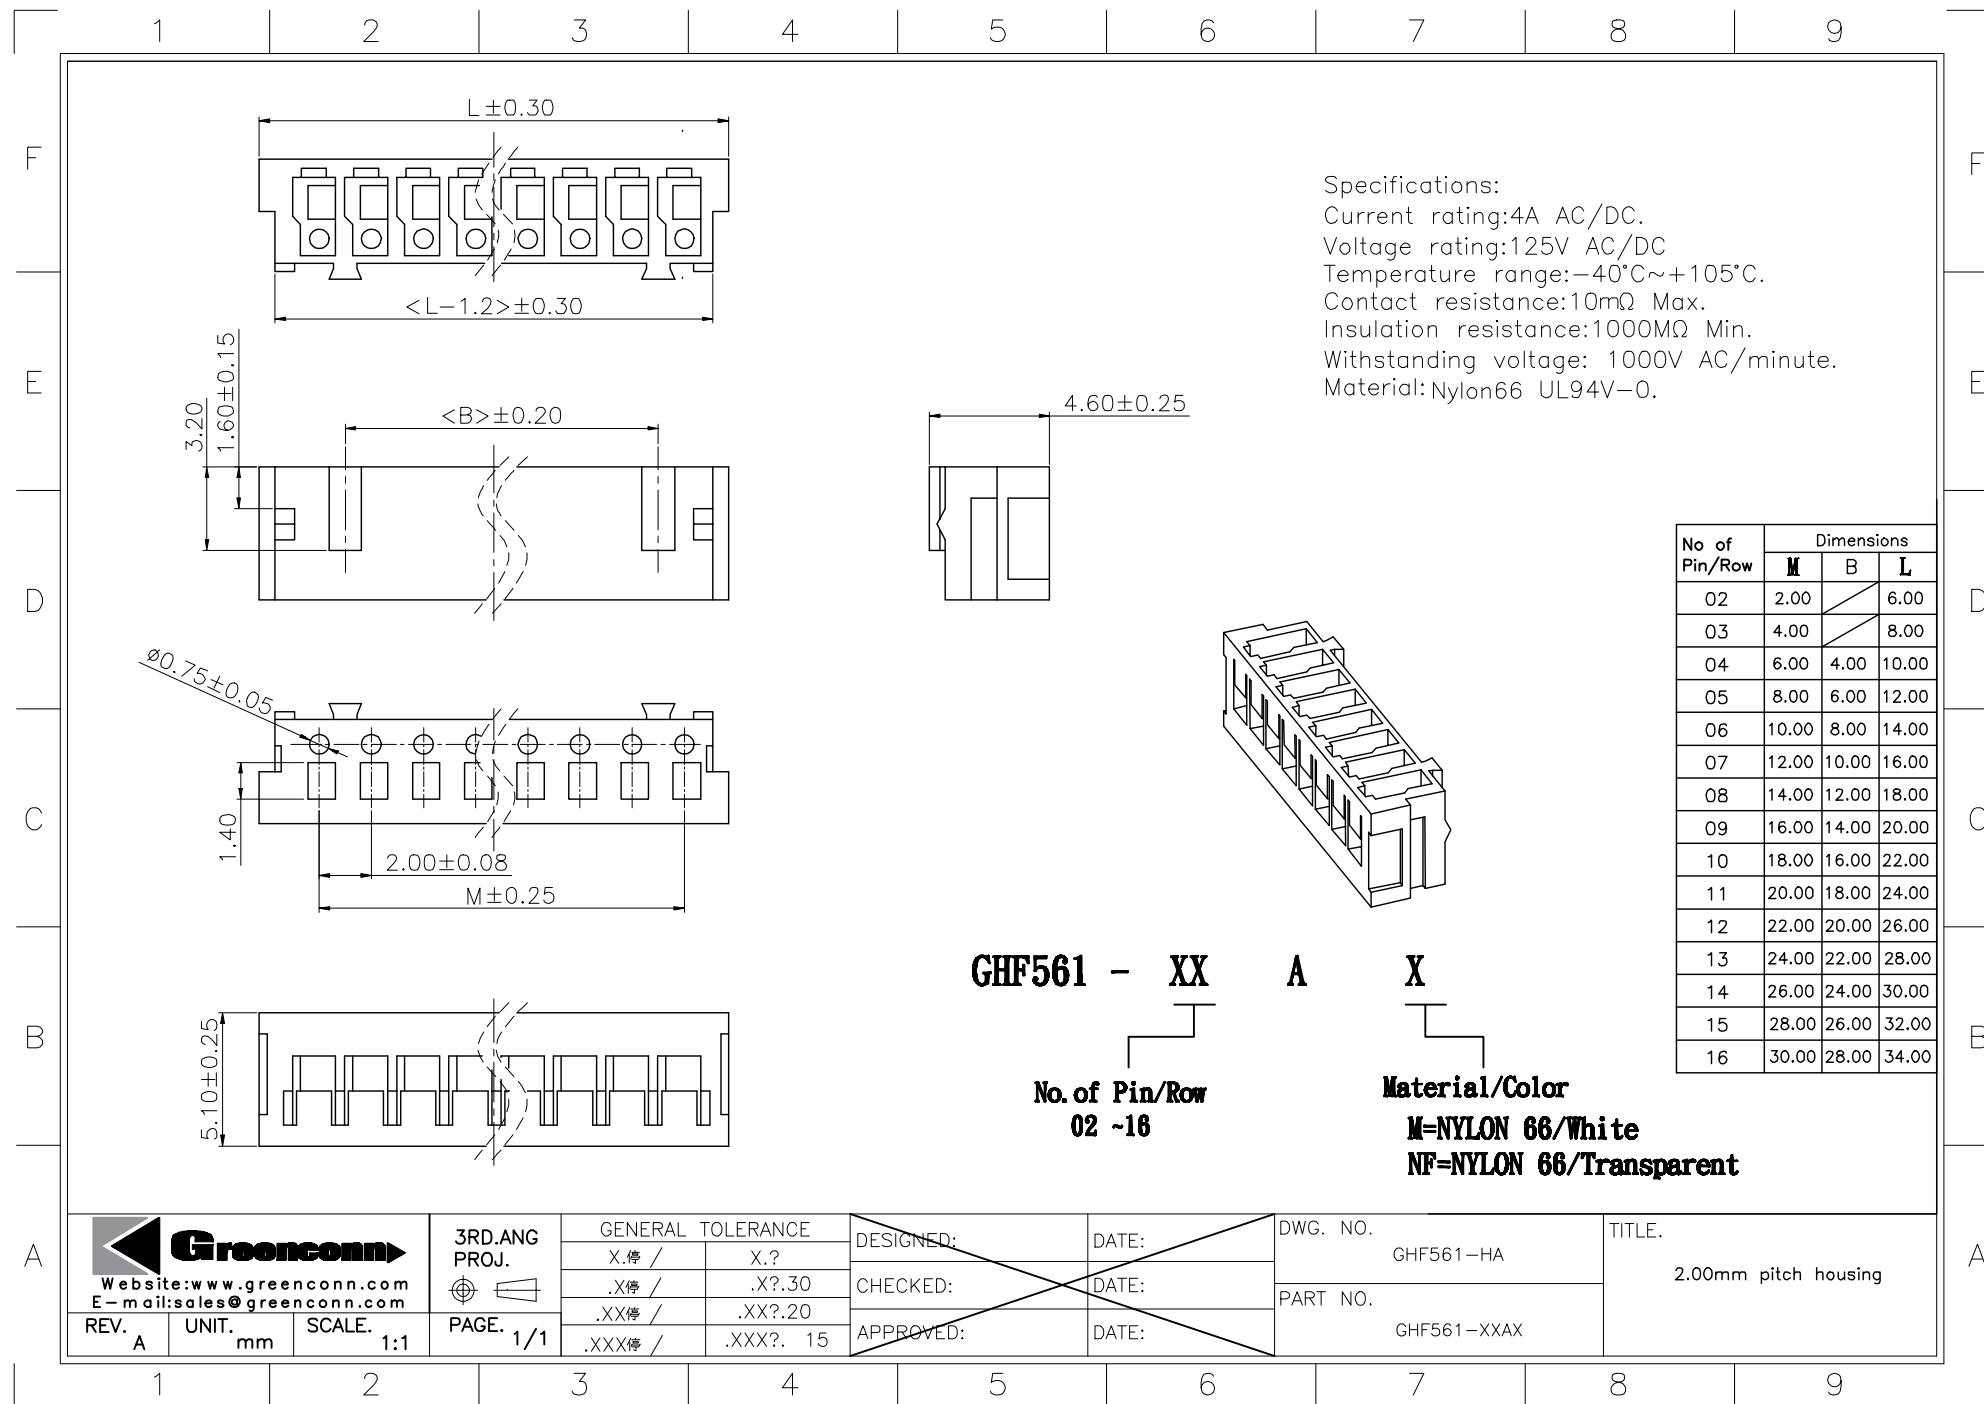


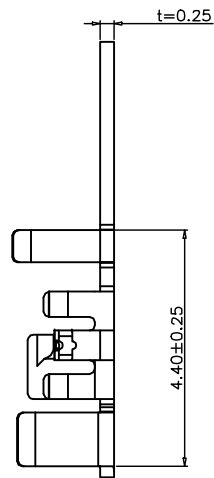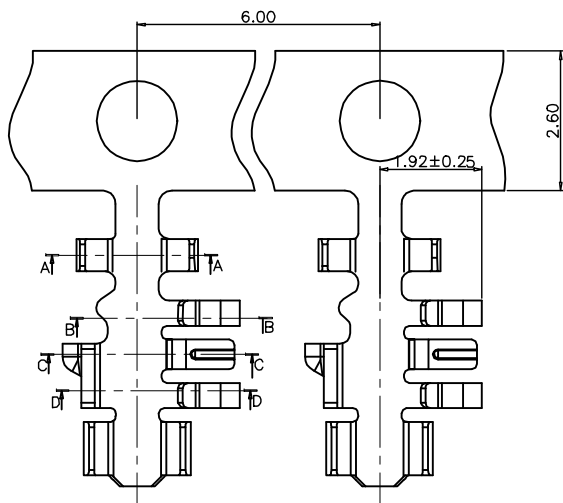



SEC:C-C




SEC:D-D



電線後收料方向
(打線開口朝外)



SEC:A-A



SEC:B-B

Ordering Information

GRF150 - 01 XX XX

Standard Plating
01=Tin
02=Gold flash


Materials
AB=Phosphor Bronze



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. 停 /	X. ?
.X 停 /	.X ? .25
.XX 停 /	.XX ? .20
.XXX 停 /	.XXX ? .15

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

GRF150-T1

PART NO.

GRF150-01 XX AB

TITLE.

2.00mm Pitch Terminal