



2P




3P

Specifications:
Current rating(额定电流):3A AC/DC.
Voltage rating(额定电压):250V AC/DC
Temperature range(工作温度):-40°C~+105°C
Contact resistance(接触电阻):30mΩ Max
Insulation resistance(绝缘电阻):1000MΩ Min
Withstanding voltage(耐压值):1000V AC/minute
Material
Housing:PA66 UL94V-0
PIN:Brass


No. of PIN/ROW	Dimensions	
	M	L
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

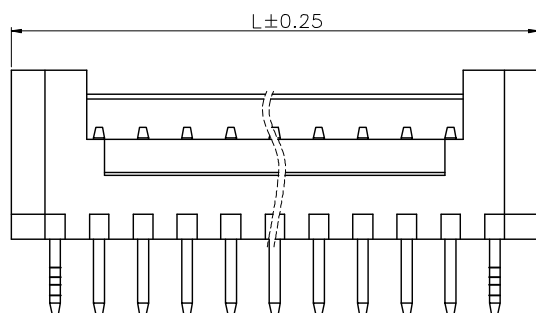



5-16P



4P



打“K”



Recommended P.C.B Layout
(Tolerance=±0.05)

Ordering Information

G WFA102 - XX XX A 015 E X B X


No. of Pins per Row 02~16 Standard Plating 02=Gold Flash Selective Plating 01=Tin 22=Matte Tin Color 1=Black 2=White Standard Packing N=PE Bag Selective Packing C=Tube



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.'±5.0'	X.±/
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.









GWFA102-CA015

PART NO.

GWFA102-XXXXA015EXBX

TITLE.

PITCH 2.0mm 180' WAFER
WITH"K"

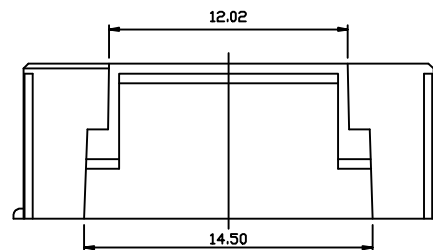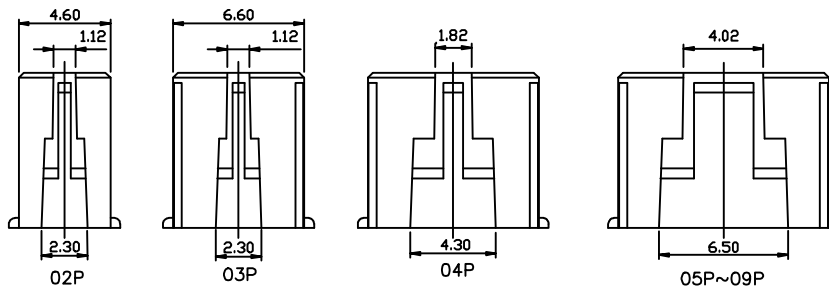

Specifications:
 Current rating: 3A AC/DC.
 Voltage rating: 250V AC/DC
 Temperature range: -40°C~+105°C.
 Contact resistance: 30mΩ Max.
 Insulation resistance: 1000MΩ Min.
 Withstanding voltage: 1000V AC/minute.
 Material: Nylon66 UL94V-0.

No. of Pin	Dimensions		
	M	L	L1
02P	2.00	4.60	5.60
03P	4.00	6.60	7.60
04P	6.00	8.60	9.60
05P	8.00	10.60	11.60
06P	10.00	12.60	13.60
07P	12.00	14.60	15.60
08P	14.00	16.60	17.60
09P	16.00	18.60	19.60
10P	18.00	20.60	21.60
11P	20.00	22.60	23.60
12P	22.00	24.60	25.60
13P	24.00	26.60	27.60
14P	26.00	28.60	29.60
15P	28.00	30.60	31.60
16P	30.00	32.60	33.60

GHF571 - XX

A

X

No. of Pin/Row
02 ~16

Material/Color

M=NYLON 66/White


NF=NYLON 66/Transparent



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. ± / X. ± /

.X. ± / .X ± 0.25

.XX. ± / .XX ± 0.15

.XXX. ± / .XXX ± 0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GHF571-HA

PART NO.

GHF571-XXAX

TITLE.

2.00mm pitch housing

