




1 2 3 4 5 6 7 8 9

F

E

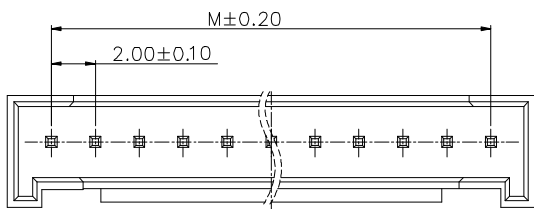

2P



3P

Specifications:

Current rating(额定电流):3A AC/DC.

Voltage rating(额定电压):250V AC/DC

Temperature range(工作温度):-40°C~+105°C

Contact resistance(接触电阻):30mΩ Max

Insulation resistance(绝缘电阻):1000MΩ Min

Withstanding voltage(耐压值):1000V AC/minute


Material

Housing:PA66 UL94V-0


PIN:Brass

No. of PIN/ROW	Dimensions	
	M	L
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00


D

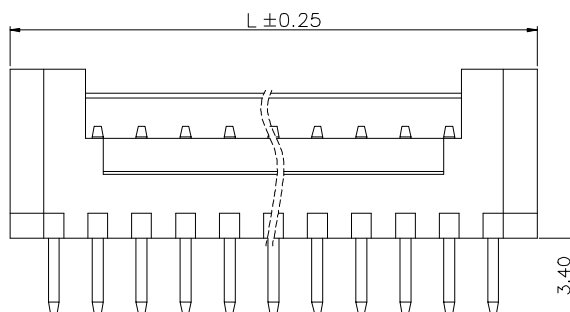

5-16P





4P



无“K”

C

B

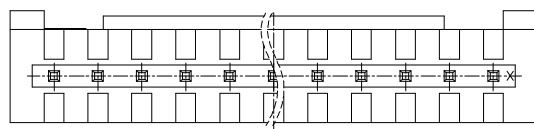

Recommended P.C.B Layout
(Tolerance=±0.05)

Ordering Information

G WFA102 - XX XX A 829 E X B X

No. of Pins per Row
02~16

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
22=Matte Tin

Color
1=Black
2=White

Standard Packing
N=PE Bag
Selective Packing
C=Tube

A



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X.±5.0'	X.±/
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWFA102-CA829

PART NO.

GWFA102-XXXXA829EXBX

TITLE.

PITCH 2.0mm 180' WAFER

1 2 3 4 5 6 7 8 9