


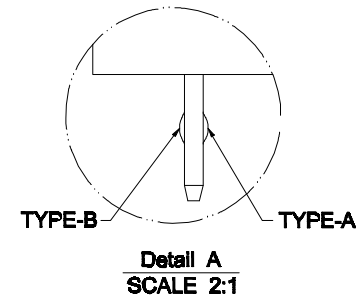
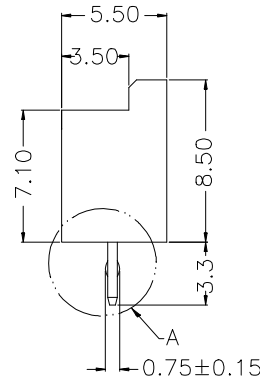


04P~20P Shape

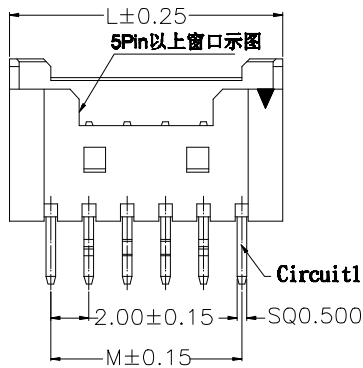

02P~03P Shape




SPECIFICATION:

Voltage rating: 125V AC/DC
Current Rating: 2A AC/DC
Withstanding Voltage: 1000V AC/minute
Temperature range: -40°C~+105°C
Insulation Resistance: ≥1000MΩ
Contact Resistance: ≤20mΩ
After environmental testing: ≤30mΩ

Materials

Contact Material: Brass

Insulator Material: PA66 UL 94V-0

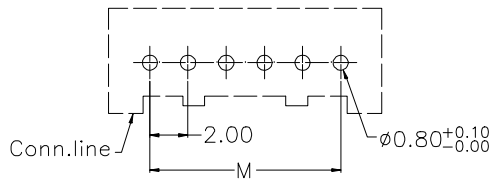

Recommended P.C.B. Layout
General Tolerance: ±0.05

With K to Choose the type(AorB)

PIN No	1	2	3	4	5	6	N-2	N-1	N
6 PIN Over	-	A	B	-	-	-	B	A	-
6 PIN	-	A	B	B	A	-	-	-	-
5 PIN	A	B	-	B	A	-	-	-	-
4 PIN	A	B	B	A	-	-	-	-	-
3 PIN	A	B	A	-	-	-	-	-	-
2 PIN	A	B	-	-	-	-	-	-	-

Ordering Information

G WFA118 - XX XX A 800 E X Z X

No. of Pins per Row
02~15

Standard Plating
01=Tin
Selective Plating
02=Gold Flash
22=Matte Tin

Color
1=Black
2=White


Standard Packing
N=PE Bag
Selective Packing
C=Tube



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
PROJ.



GENERAL TOLERANCE

X: ±5.0° X: ±/

.X: ±3.0° .X: ±0.30

.XX: ±2.0° .XX: ±0.25

.XXX: ±1.0° .XXX: ±0.15

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

GWFA118-CA800EZ

PART NO.

GWFA118-XXXXA800EXZX

TITLE.

2.0mm Crimp Style Connector