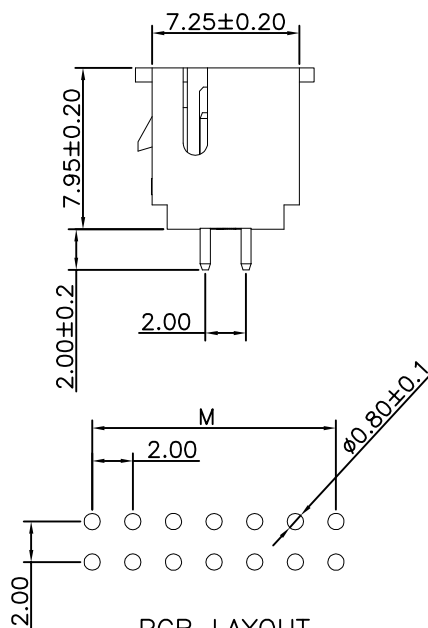
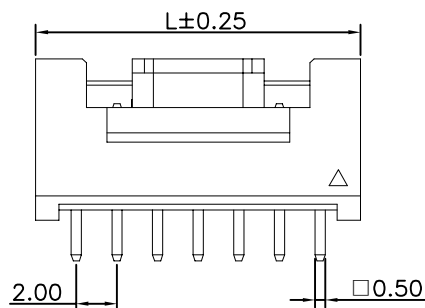
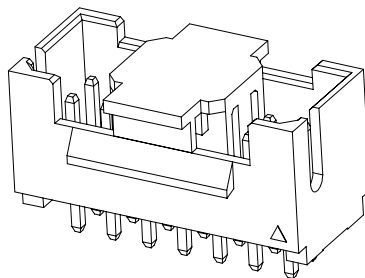
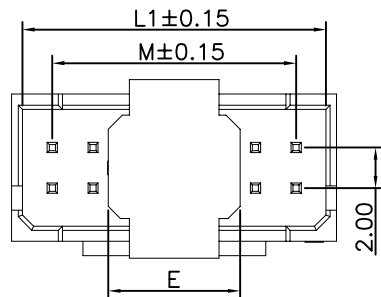


Ordering Information

G WFA218 - XX XX A 001 C X B X

No. of Pins per Row 02~16
Standard Plating 01=Tin

Color
2=White

Standard Packing
D=T&R
F=CAP+T&R

Specifications
Current Rating:3.0A AC DC
Voltage Rating:250V AC DC
Insulation Resistance:≥1000MΩ Min.
Dielectric Withstanding Voltage:1000V AC/minute
Contact Resistance:≤30mΩ Max.
Operating Temperature:-25°C to +85°C
Materials
Contact Material:Brass
Insulation Material:UL94V-0 LCP
All materials must meet GREENCONN
hazardous substances control standards.

No. of PIN/ROW	M	L1	L	L2	E
02	2.00	4.95	6.00	3.00	小盖 (4.5)
03	4.00	6.95	8.00	3.00	大盖 (6.5)
04	6.00	8.95	10.00	3.00	
05	8.00	10.95	12.00	5.00	
06	10.00	12.95	14.00	7.00	
07	12.00	14.95	16.00	9.00	
08	14.00	16.95	18.00	11.00	
09	16.00	18.95	20.00	13.00	
10	18.00	20.95	22.00	15.00	
11	20.00	22.95	24.00	17.00	
12	22.00	24.95	26.00	19.00	
13	24.00	26.95	28.00	21.00	
14	26.00	28.95	30.00	23.00	
15	28.00	30.95	32.00	25.00	
16	30.00	32.95	34.00	27.00	



3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.50
.X*±2.0°	.X±0.30
.XX*±1.0°	.XX±0.20
.XXX*±/	.XXX±/

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
GWFA218-CA001CB
PART NO.
GWFA218-XXXX A001CXBX

TITLE.
2.0mm pitch
180°Wafer DIP TYPE