
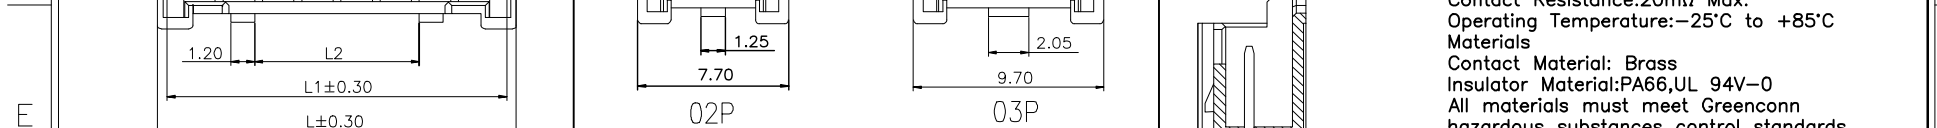



1 2 3 4 5 6 7 8 9

F

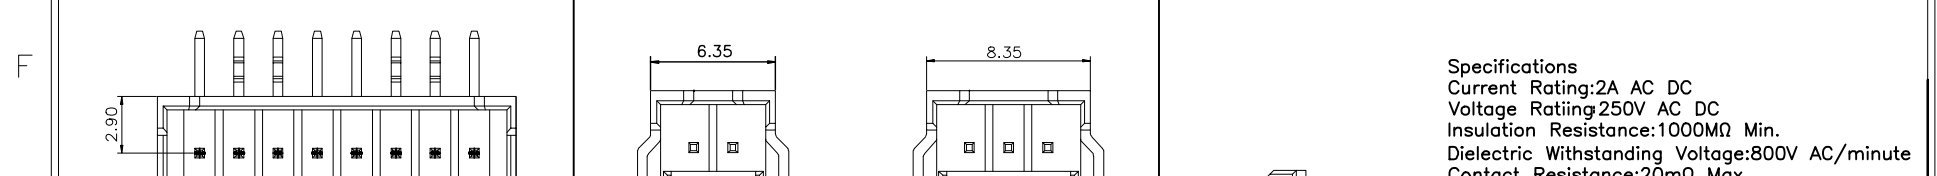

Specifications
 Current Rating: 2A AC DC
 Voltage Rating: 250V AC DC
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding Voltage: 800V AC/minute
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -25°C to +85°C
Materials
 Contact Material: Brass
 Insulator Material: PA66, UL 94V-0
 All materials must meet Greenconn hazardous substances control standards.
Mating With:
 Terminal: GRF175-T1
 Housing: GWF281-HA

E

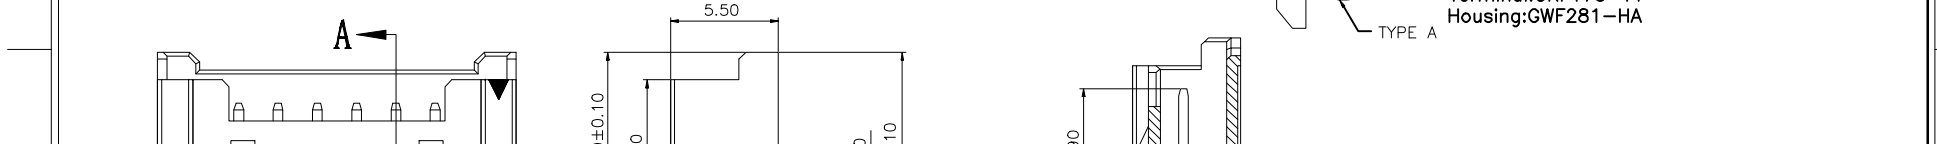


D

With K to Choose the type(A Or B):

No. of Pin/Row	PIN No	Dimensions(mm)				No. of Pin/Row	Dimensions(mm)			
		M	L2	L1	L		M	L2	L1	L
02	2.00	--	--	--	12	22.00		25.30	26.30	
03	4.00	--	--	--	13	24.00		27.30	28.30	
04	6.00	4.40	9.30	10.30	14	26.00		29.30	30.30	
05	8.00	4.30	11.30	12.30	15	28.00		31.30	32.30	
06	10.00	6.40	13.30	14.30	16	30.00	8.40	33.30	34.30	
05 PIN	A B - B A				07	12.00		15.30	16.30	
04 PIN	A B B A				08	14.00		17.30	18.30	
03 PIN	A B A				09	16.00	8.40	19.30	20.30	
02 PIN	A A				10	18.00		21.30	22.30	
					11	20.00		23.30	24.30	

C

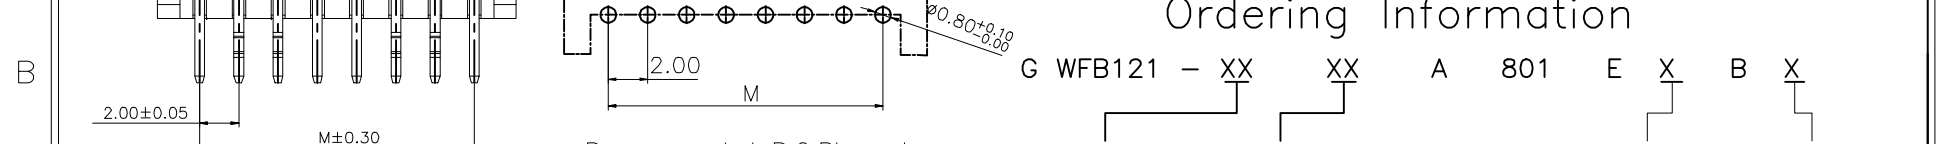

Recommended P.C. B layout
 General Tolerance ±0.05

Ordering Information

G WFB121 - XX XX A 801 E X B X

No. of Pins per Row 02~20 Standard Plating 01=Tin Color E=Beige
 Selective Plating 02=Gold Flash Standard Packing N=PE Bag Standard Packing B=Tray

B

A

<p>Website: www.greenconn.com E-mail: sales@greenconn.com</p>	3RD. ANG PROJ. 	GENERAL TOLERANCE X. ±5.0' X. ±0.35		DESIGNED: _____ DATE: _____ CHECKED: _____ DATE: _____ APPROVED: _____ DATE: _____	DWG. NO. GWFB121-A801EB	TITLE. 2.0mm WAFER 90° With Kink
		REV. 02 UNIT. mm SCALE. 1:1	PAGE. 1/1			

1 2 3 4 5 6 7 8 9