
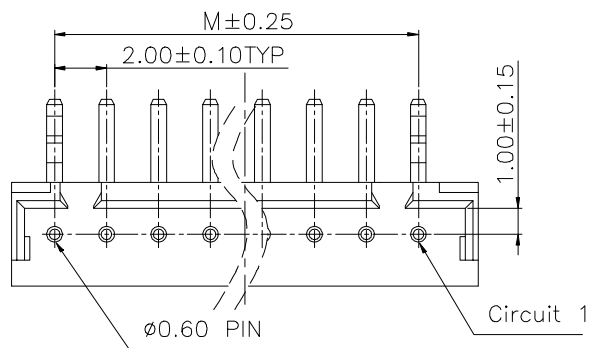




Specifications:
 Current rating:4A AC/DC.
 Voltage rating:125V AC/DC
 Temperature range:-40°C~+105°C.
 Contact resistance:10mΩ Max.
 Insulation resistance:1000MΩ Min.
 Withstanding voltage: 1000V AC/minute.

Material:
 Housing:PA66 UL94V-0
 Contact:Copper Alloy

No. of PIN/ROW	Dimensions	
	M	L
02	2.00	5.96
03	4.00	7.95
04	6.00	9.96
05	8.00	11.96
06	10.00	13.96
07	12.00	15.96
08	14.00	17.96
09	16.00	19.96
10	18.00	21.96
11	20.00	23.96
12	22.00	25.96
13	24.00	27.96
14	26.00	29.96
15	28.00	31.96

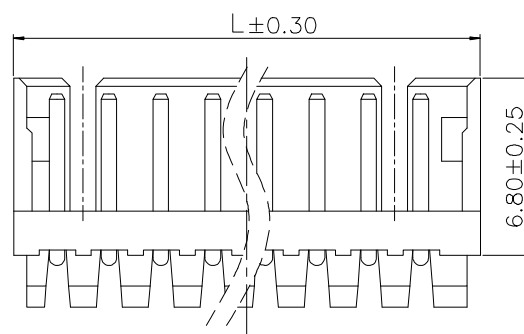

Ordering Information

G WFB123 - XX XX A 003 E X B X

No. of Pins per Row 02~15 Standard Plating 02=Gold Flash Selective Plating 01=Tin 22=Matte Tin Color 1=Black 2=White Standard Packing N=PE Bag Selective Packing C=Tube



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
 PROJ.

GENERAL TOLERANCE

X.±5.0'	X.±/
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.


GWFB123-CA003




PART NO.

GWFB123-XXXXA003EXBX


TITLE.

PITCH 2.0mm 90° WAFER

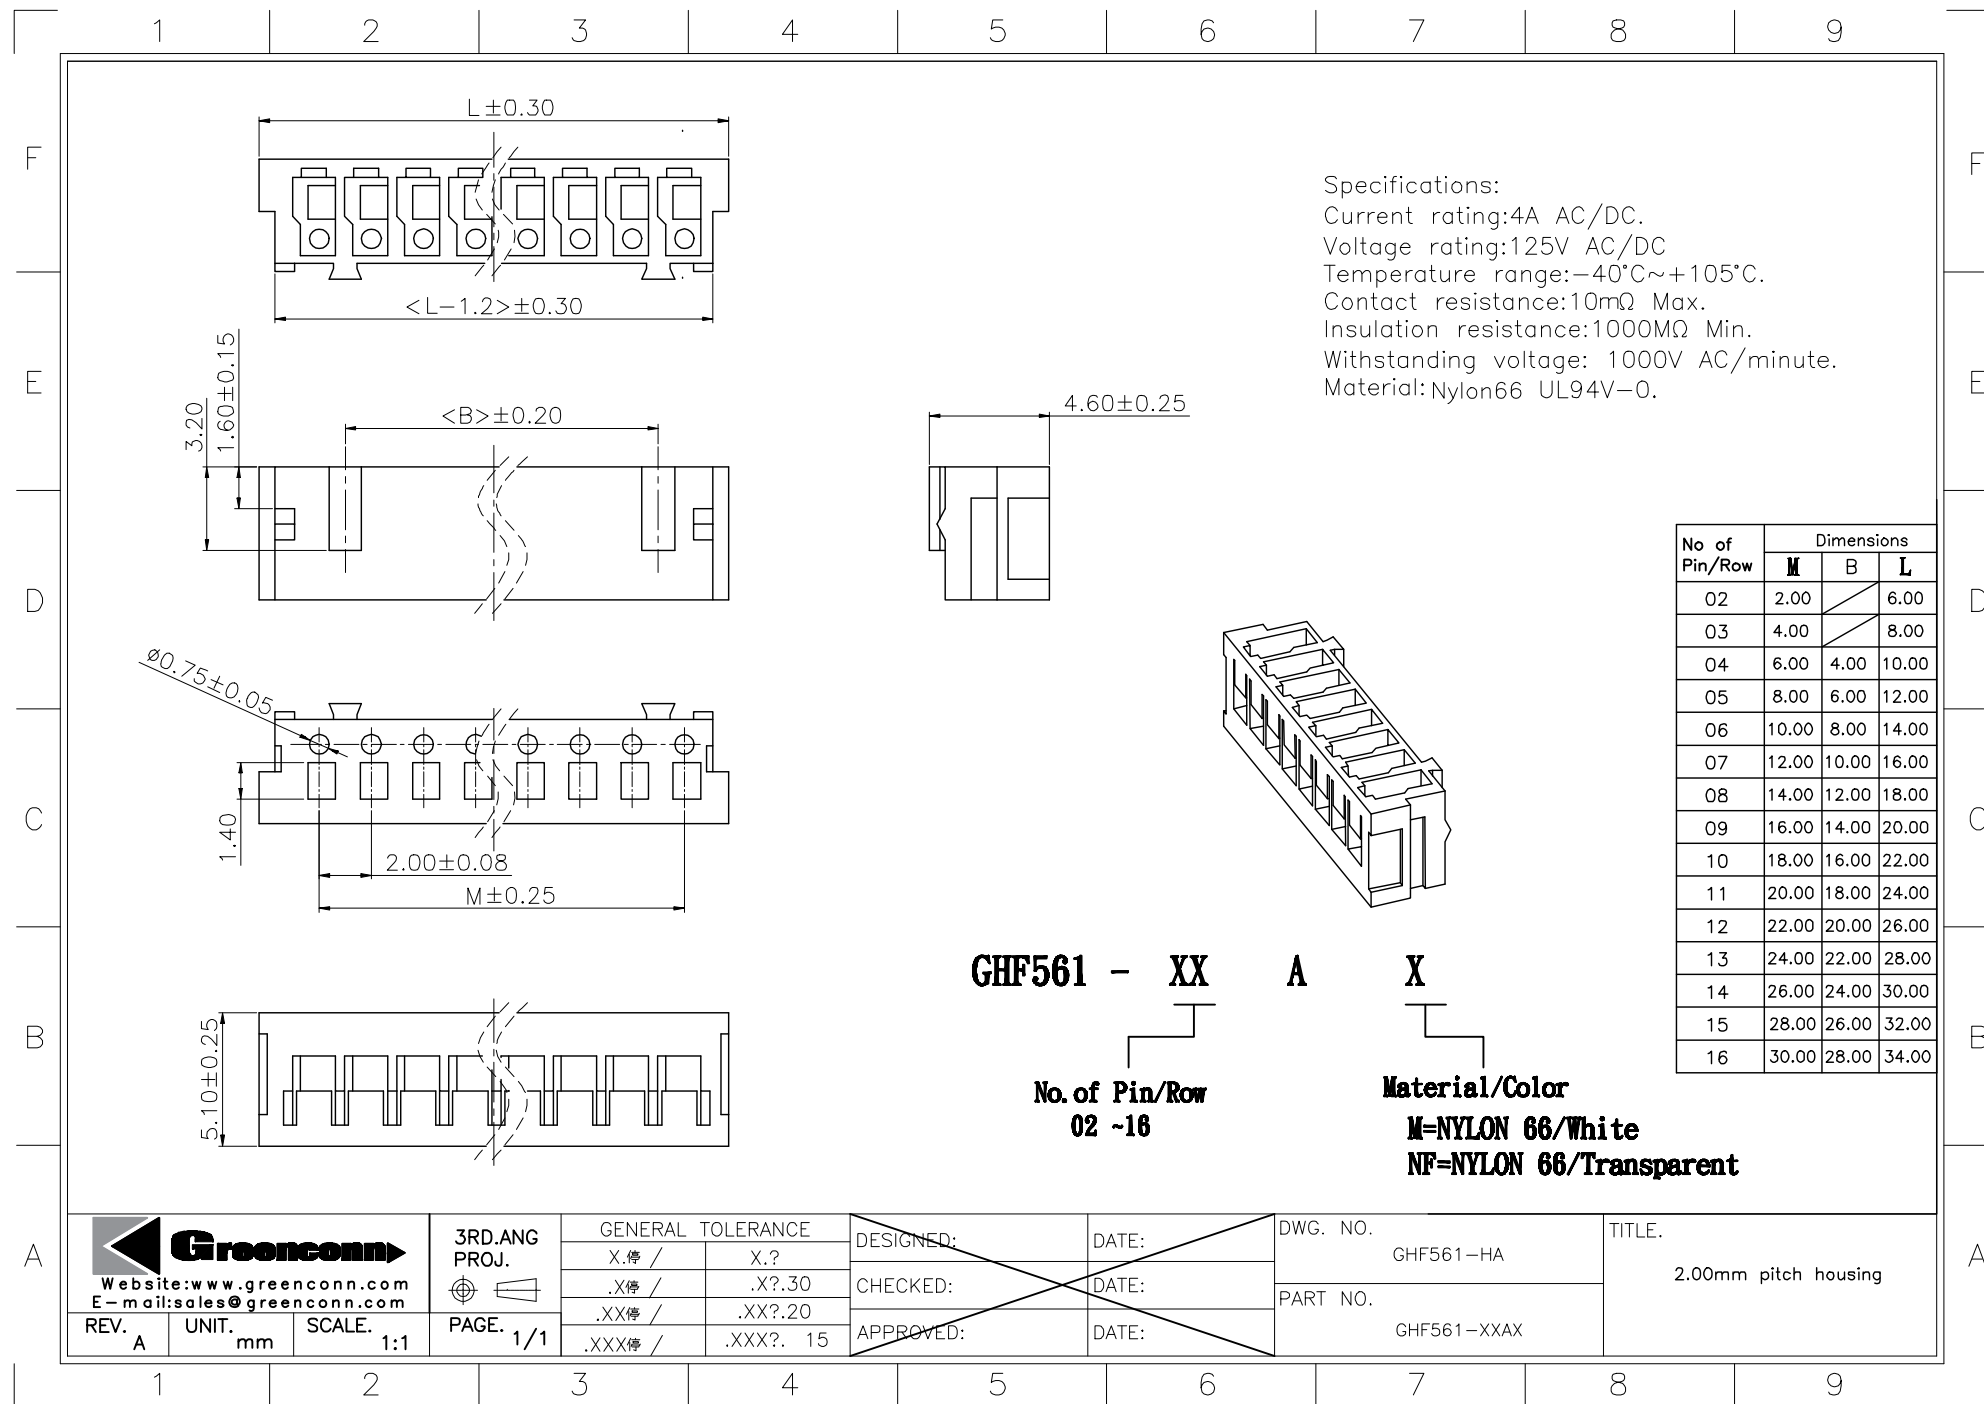


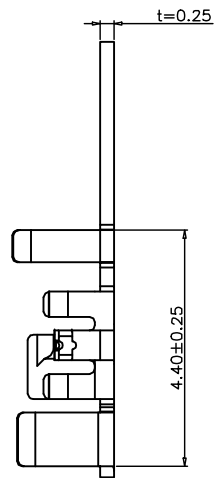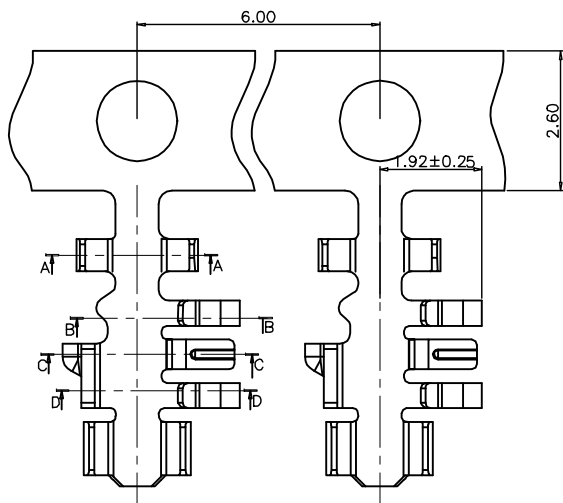



SEC:C-C




SEC:D-D



電線後收料方向
(打線開口朝外)



SEC:A-A



SEC:B-B

Ordering Information

GRF150 - 01 XX XX

Standard Plating
01=Tin
02=Gold flash


Materials
AB=Phosphor Bronze



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. 停 /	X. ?
.X 停 /	.X ? .25
.XX 停 /	.XX ? .20
.XXX 停 /	.XXX ? .15

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

GRF150-T1

PART NO.

GRF150-01 XX AB

TITLE.

2.00mm Pitch Terminal