

F

F

E

E

D

D

C

C

B



B

A

A

Recommended P.C.B Layout(Top Side)

P.C.B Thickness
(Tolerance=±0.05)

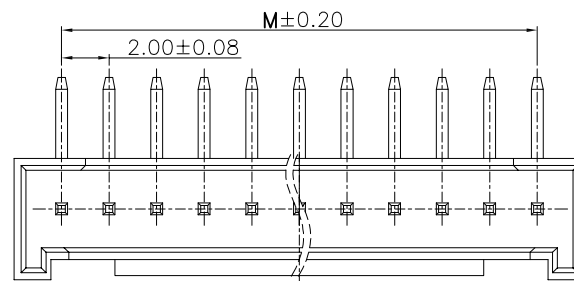

Specifications

Current Rating: 3A AC/DC

Voltage Rating: 250V AC/DC

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding Voltage:1000VAC/minute

Contact Resistance: 30mΩ Max.


Operating Temperature:-40℃ to +105℃

Materials



Contact Material: Brass

Insulator Material:Nylon-66・UL 94V-0


All materials must meet Greenconn
hazardous substances control standards.




2P示意图

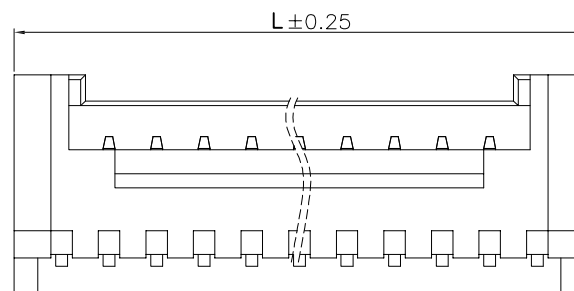


5-16P示意图



3P示意图



4P示意图

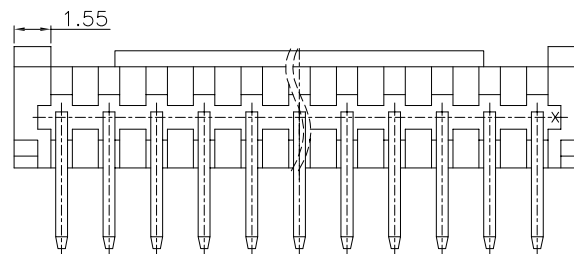

No. Of Pins	Dimensions	
	M	L
02P	2.00	6.00
03P	4.00	8.00
04P	6.00	10.00
05P	8.00	12.00
06P	10.00	14.00
07P	12.00	16.00
08P	14.00	18.00
09P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00


Ordering Information

GWFB123	- XX	XX	A	005	E	X	B	X
No. Of Pins Per Row 02~16		Standard Plating 02=Gold Flash Selective plating 01=Tin 22=Matte Tin	Color 1=Black 2=White		Standard Packing N=PE Bag Selective packing C=Tube			



REV. A UNIT. mm SCALE. 1:1

3RD.ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.*±/'	X.±/
.X*±2.0°	.X±0.25
.XX*±1.0°	.XX±0.20
.XXX*±/'	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWFB123-CA005EB

PART NO.

GWFB123-XXXX A005EXBX

TITLE.

2.00mm 90° WAFER

9B

1

2

3

4


5

6



7

8



9




2P 示图

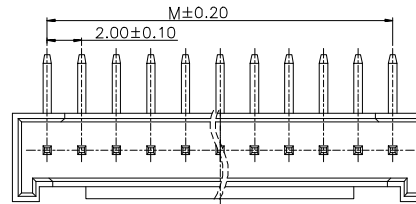


3P 示图

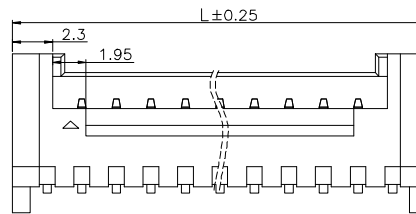

5-16P 示图




4P 示图

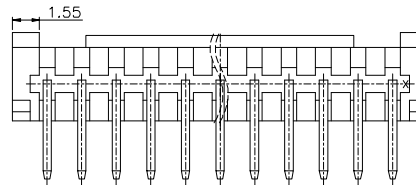

Specifications:
Current rating:3A AC/DC.
Voltage rating:250V AC/DC
Temperature range:-40°C~+105°C.
Contact resistance:30mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 1000V AC/minute.

Material:
Housing:PA66 UL94V-0
Contact:Copper Alloy



No. of PIN/ROW	Dimensions	
	M	L
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

Ordering Information

G WFB123 - XX XX A 004 E X B X


No. of Pins per Row 02~16 Standard Plating 02=Gold Flash Selective Plating 01=Tin 22=Matte Tin Color 1=Black 2=White Standard Packing N=PE Bag Selective Packing C=Tube



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.
3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.±5.0'	X.±/
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.








GWFB123-CA004

PART NO.


GWFB123-XXXXA004EXBX

TITLE.

PITCH 2.0mm 90° WAFER
with "K"

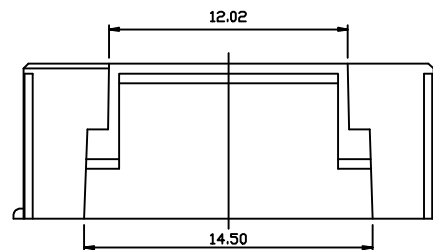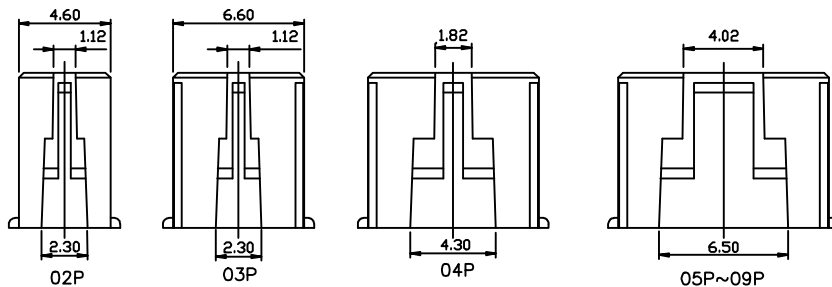

大于03P



GHF571 - XX

No. of Pin/Row
02 ~16

A

X

Material/Color

M=NYLON 66/White

NF=NYLON 66/Transparent

Specifications:
Current rating:3A AC/DC.
Voltage rating:250V AC/DC
Temperature range:-40°C~+105°C.
Contact resistance:30mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 1000V AC/minute.
Material:Nylon66 UL94V-0.


No. of Pin	Dimensions		
	M	L	L1
02P	2.00	4.60	5.60
03P	4.00	6.60	7.60
04P	6.00	8.60	9.60
05P	8.00	10.60	11.60
06P	10.00	12.60	13.60
07P	12.00	14.60	15.60
08P	14.00	16.60	17.60
09P	16.00	18.60	19.60
10P	18.00	20.60	21.60
11P	20.00	22.60	23.60
12P	22.00	24.60	25.60
13P	24.00	26.60	27.60
14P	26.00	28.60	29.60
15P	28.00	30.60	31.60
16P	30.00	32.60	33.60



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. ± / X. ± /

.X. ± / .X ± 0.25

.XX. ± / .XX ± 0.15

.XXX. ± / .XXX ± 0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GHF571-HA

PART NO.

GHF571-XXAX

TITLE.

2.00mm pitch housing

