




2pin



3pin



4pin





5pin

Specifications:

- Voltage rating: 125V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$

Material:

- Insulator material: PA9T UL94V-0
- Contact material: Brass

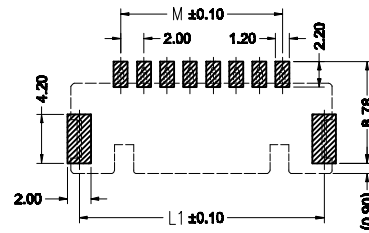

RECOMMENDED P.C.B LAYOUT
(TOLERANCE: ± 0.05)

Poles	Dimensions (mm)				
	L	L1	L2	L3	M
02	10.60	9.23	8.30	4.80	2.00
03	12.60	11.23	8.30	6.80	4.00
04	14.60	13.23	10.30	8.80	6.00
05	16.60	15.23	12.30	10.80	8.00
06	18.60	17.23	14.30	12.80	10.00
07	20.60	19.23	16.30	14.80	12.00
08	22.60	21.23	18.30	16.80	14.00
09	24.60	23.23	20.30	18.80	16.00
10	26.60	25.23	22.30	20.80	18.00
11	28.60	27.23	24.30	22.80	20.00
12	30.60	29.23	26.30	24.80	22.00
13	32.60	31.23	28.30	26.80	24.00
14	34.60	33.23	30.30	28.80	26.00
15	36.60	35.23	32.30	30.80	28.00

Ordering Information


G	WFC112-XX	XX	A	001	D	X	Z	X
No. of Pins per Row 02~15		Standard Plating 22=Matte Tin Selective Plating 01=Tin 02=Gold Flash			Color 1=Black R=Red		Standard Packing H=Mylar+Tape&Reel Selective Packing D=Tape&Reel	



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X' ± 3.0	X $\pm$ /
.X' ± 2.0	.X ± 0.30
.XX' ± 1.5	.XX ± 0.25
.XXX' ± 1.0	.XXX ± 0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWFC112-CA1DZ

PART NO.

GWFC112-XXXXA001DXZX

TITLE.

Pitch 2.00mm SMT
Wafer Connector