

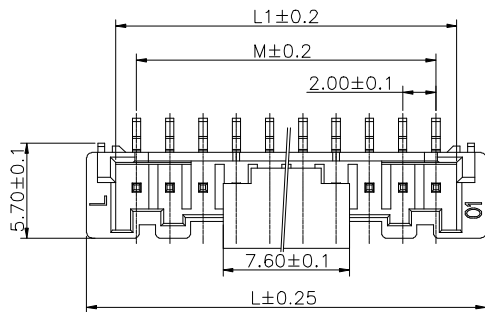



Schematic Diagram of
10, 11, 12, 13, 14, 15-Hole



Specifications:
Contact resistance: $\leq 20\text{m}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
Rated voltage: 250V AC DC
Rated current: 3.0A AC DC
Withstand Voltage: 800V AC/minute
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Materials
Contact Material: Brass
Insulation Material: UL94V-0 PA6T
All materials must meet GREENCONN
hazardous substances control standards.

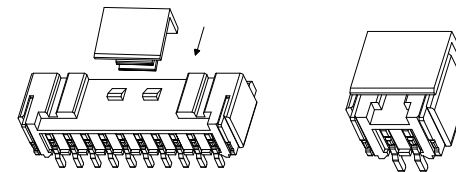

No. of PIN/ROW	M	L	L1
02	2.00	8.00	4.55
03	4.00	10.00	6.55
04	6.00	12.00	8.55
05	8.00	14.00	10.55
06	10.00	16.00	12.55
07	12.00	18.00	14.55
08	14.00	20.00	16.55
09	16.00	22.00	18.55
10	18.00	24.00	20.55
11	20.00	26.00	22.55
12	22.00	28.00	24.55
13	24.00	30.00	26.55
14	26.00	32.00	28.55
15	28.00	34.00	30.55

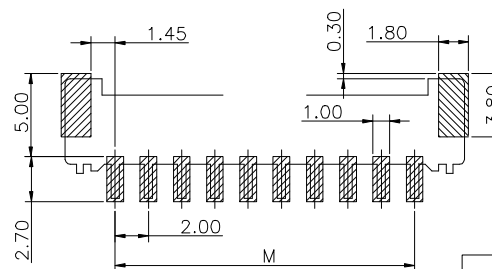

PCB LAYOUT






Ordering Information

G WFC115 - XX XX A 001 B X B X
No. of Pins per Row 02~15
Standard Plating 01=Tin

Color
5=Beige

Standard Packing
F=CAP+T&R

SCALE: 2/1



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X. $\pm 5.0^{\circ}$	X. ± 0.50
.X. $\pm 2.0^{\circ}$	.X. ± 0.30
.XX. $\pm 1.0^{\circ}$	.XX. ± 0.20
.XXX. $\pm$	.XXX. $\pm$

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.







GWFC115-CA001BB

PART NO.

GWFC115-XXXX A001BXX

TITLE.

2.00mmPITCH 180°
WAFFER SMT TYPE

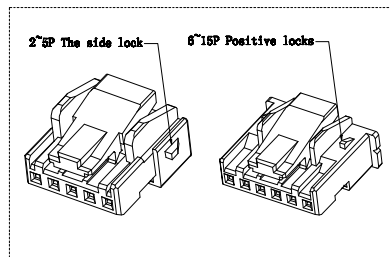

6P 形状上 Shape

Ordering Information

GHF621 - XX A XX

No. of Pins per Row
02~15

Material/Color
P1=NYLON 66/白色

Specifications
Insulation Resistance: $\geq 1000M\Omega$
Rated Voltage: 250V AC DC
Rated Current: 3.0A AC DC
Withstand Voltage: 800V AC/minute
Contact Resistance: $< 10m\Omega$
Temperature Range: $-40^{\circ}C$ to $+125^{\circ}C$

Mating With:
Wafer: GWFC115
Terminal: GRF174
Optional accessories: GHF631

All materials must meet GREENCONN hazardous substances control standards.

No. of PIN/ROW	Dim M	Dim L	Dim L1	Dim L2
02	2.00	4.40	3.30	
03	4.00	6.40	5.10	
04	6.00	8.40	6.80	
05	8.00	10.40	9.05	
06	10.00	12.40	11.15	10.00
07	12.00	14.40	13.15	10.00
08	14.00	16.40	15.15	10.00
09	16.00	18.40	17.15	12.00
10	18.00	20.40	19.15	17.40
11	20.00	22.40	21.15	17.40
12	22.00	24.40	23.15	17.40
13	24.00	26.40	25.15	17.40
14	26.00	28.40	27.15	17.40
15	28.00	30.40	29.15	17.40



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG PROJ.
PAGE. 1/3

GENERAL TOLERANCE

X. $\pm 5.0^{\circ}$	X. ± 0.50
.X. $\pm 2.0^{\circ}$	.X. ± 0.30
.XX. $\pm 1.0^{\circ}$	.XX. ± 0.20
.XXX. $\pm$	.XXX. $\pm$

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GHF621-HA

PART NO.

GHF621-XXAP1

TITLE.

2.00mm PINCH Housing

