
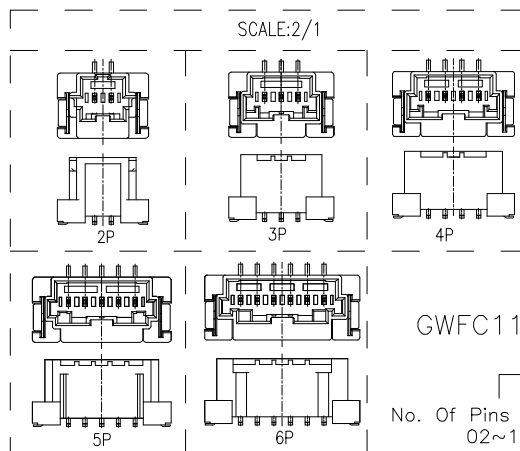
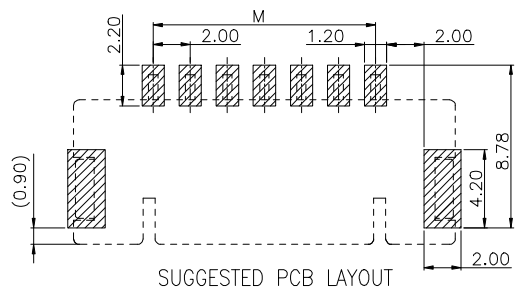
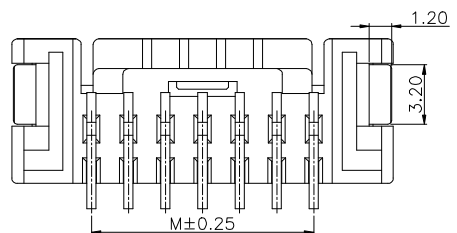

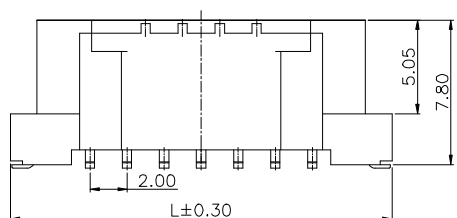
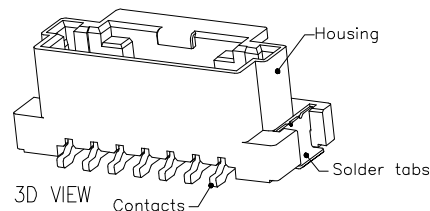


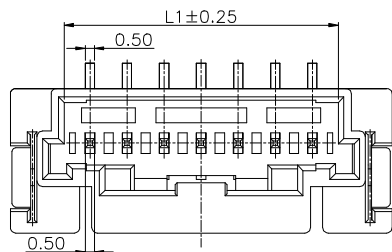

Specifications
 Current Rating:3.0A AC DC
 Voltage Rating:125V AC DC
 Insulation Resistance:1000MΩ Min.
 Dielectric Withstanding Voltage:500V AC/minute
 Contact Resistance:10mΩ Max.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material:Nylon-9T,UL 94V-0
 Solder Tabs: Brass
 All materials must meet Greenconn hazardous substances control standards.

PIN	M	L	L1	PIN	M	L	L1
2	2.00	10.90	4.80	9	16.00	24.60	18.80
3	4.00	12.60	6.80	10	18.00	26.60	20.80
4	6.00	14.60	8.80	11	20.00	28.60	22.80
5	8.00	16.60	10.80	12	22.00	30.60	24.80
6	10.00	18.60	12.80	13	24.00	32.60	26.80
7	12.00	20.60	14.80	14	26.00	34.60	28.80
8	14.00	22.60	16.80	15	28.00	36.60	30.80

Ordering Information


GWFC116 - XX XX A 001 D X A X
 No. Of Pins Per Row 02~15 Standard Plating 22=Matte Tin Color 2=White Standard Packing D=Tape&Reel



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG PROJ.



GENERAL TOLERANCE

X.±5°	X.±0.50
.X'±2°	.X±0.30
.XX'±1°	.XX±0.20
.XXX'±/°	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.


GWFC116-CA001DA


PART NO.

GWFC116-XXXXA001DXAX

TITLE.

2.00mm PITCH
 180° SMT WAFER

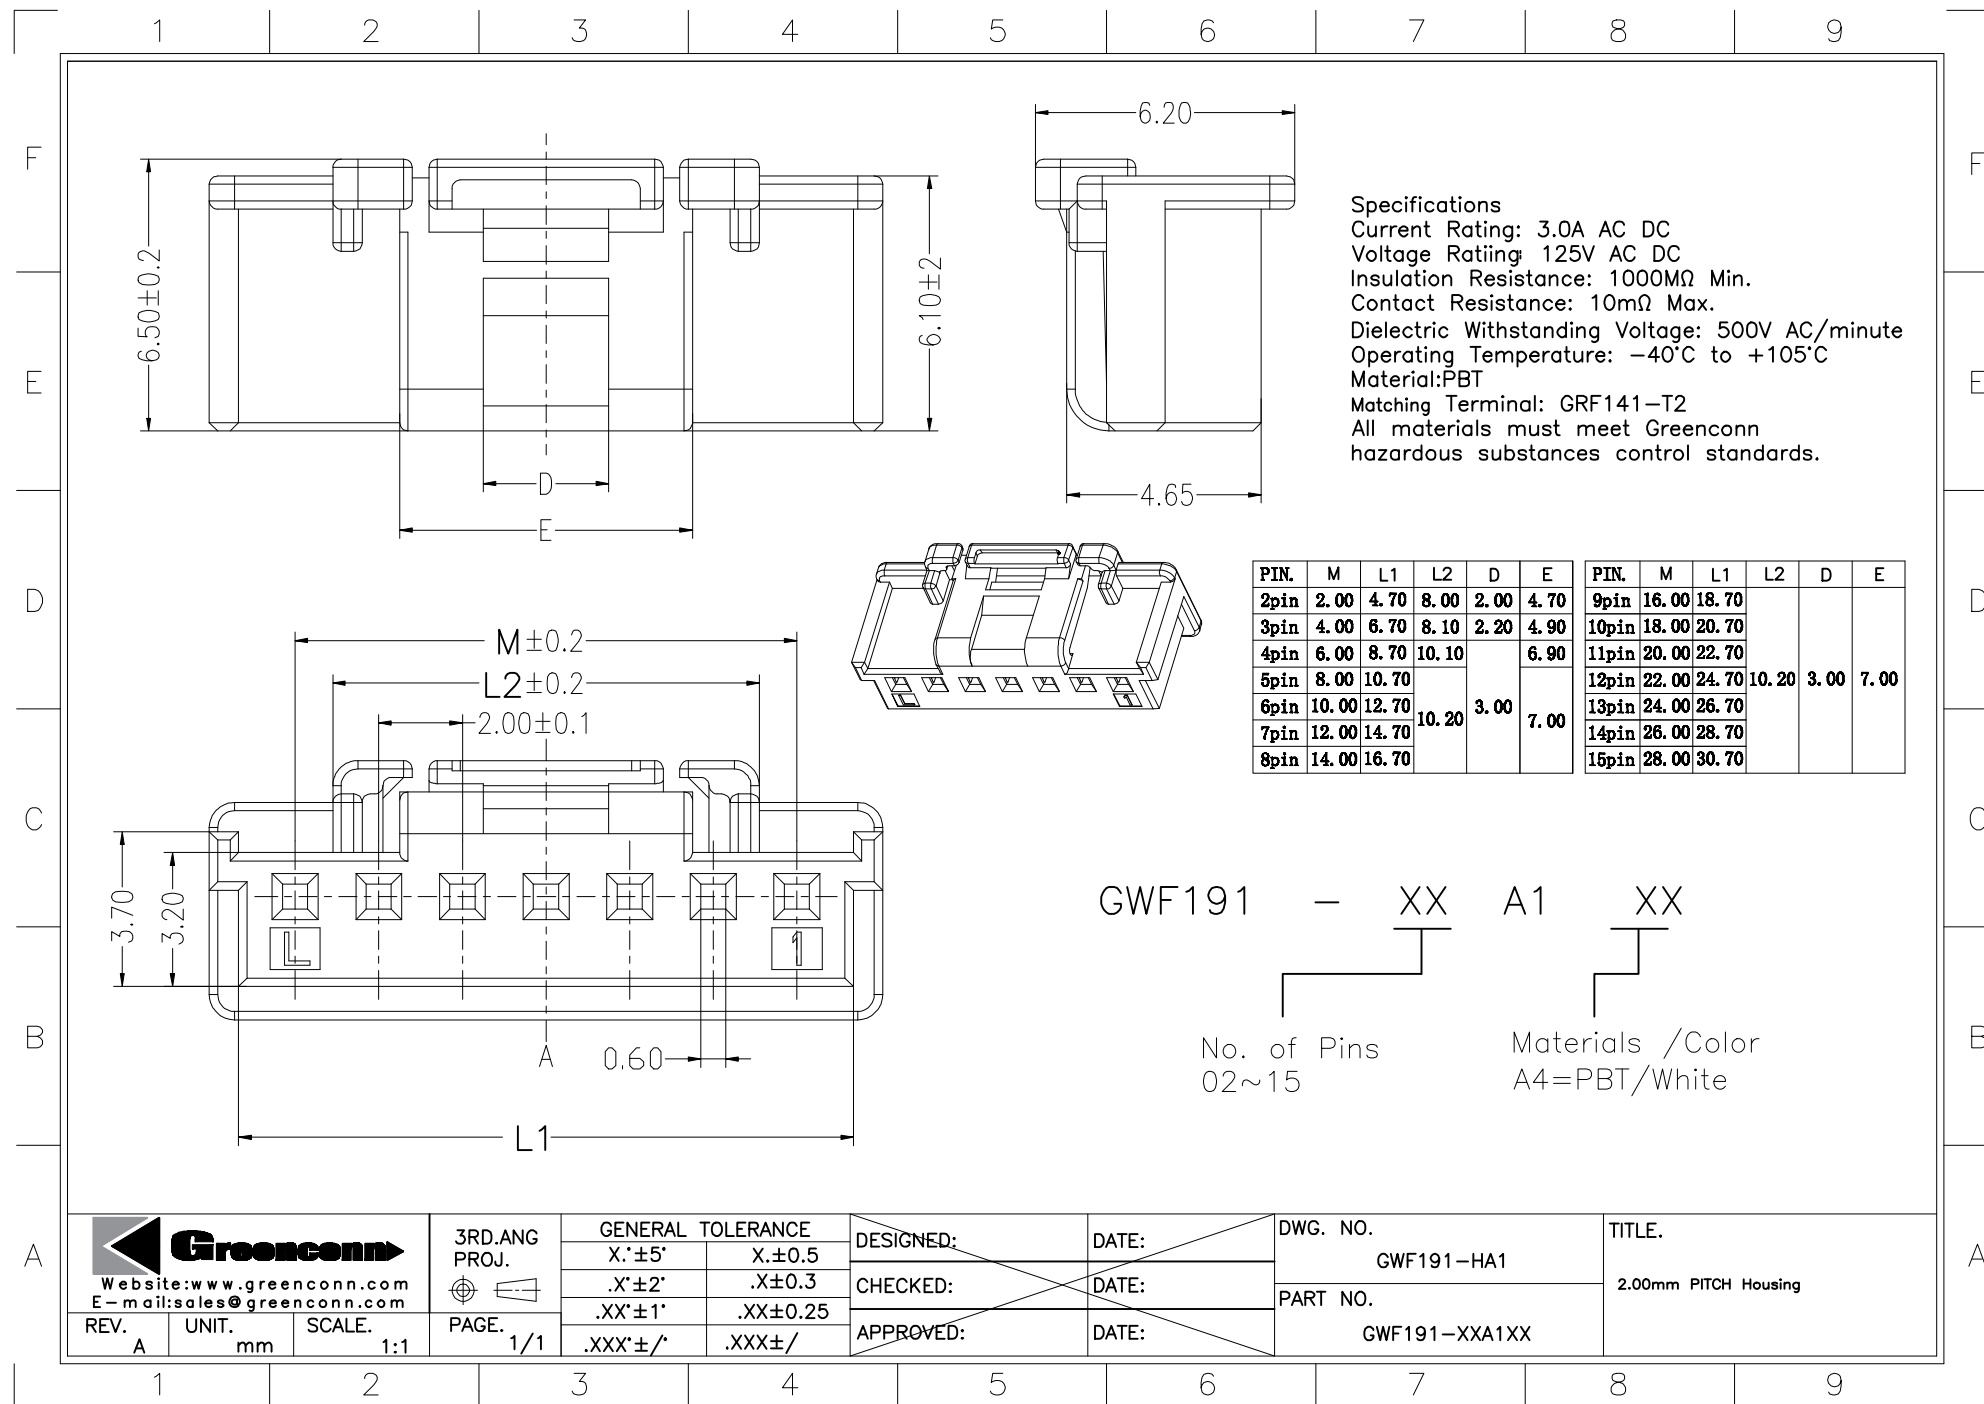



Materials
AB=Phosphor bronze

 Website: www.greenconn.com E-mail: sales@greenconn.com			3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.	TITLE.
				X. $\pm$ 5°	X. $\pm$ 0.5				
REV.	A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	.X' $\pm$ 2°	.X $\pm$ 0.3	APPROVED:	DATE:	PART NO.
					.XX' $\pm$ 1°	.XX $\pm$ 0.25			
					.XXX' $\pm$ /'	.XXX $\pm$ /'			