
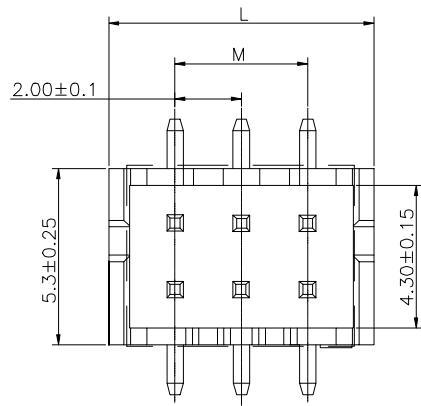




PCB LAYOUT(±0.05)

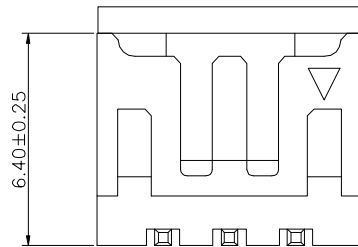

2P示意图

Specifications

Current Rating:3Amp AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20mΩ Max.

Insulation Resistance:1000MΩ Min.

Dielectric Withstanding Voltage:800VAC

Temperature Range:-40°C to +105°C

Materials

Contact Material:Brass

Insulator Material:PA 9T

All materials must meet GREENCONN hazardous substances control standards.

CIRCUITS	L	M
02	6.00	2.00
03	8.00	4.00
04	10.00	6.00
05	12.00	8.00
06	14.00	10.00
07	16.00	12.00
08	18.00	14.00
09	20.00	16.00
10	22.00	18.00
11	24.00	20.00
12	26.00	22.00
13	28.00	24.00
14	30.00	26.00
15	32.00	28.00
16	34.00	30.00
17	36.00	32.00
18	38.00	34.00
19	40.00	36.00
20	42.00	38.00

Ordering Information

G WFC201 - XX XX A 001 D X B X

No. of Pins per Row 02~20

Standard Plating 01=Tin Selective Plating 02=Gold Flash

Color 2=White

Standard Packing F=CAP+Tape&Reel

格稜股份有限公司
Greenconn Corporation

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1



GENERAL TOLERANCE

X.±	X.±
.X'±	.X±0.25
.XX'±	.XX±0.15
.XXX'±	.XXX±0.10

DESIGNED:

DATE:

DWG. NO.

GWFC201-CA1DB

TITLE.

2.0mm pitch 180° double row wafer smt type

CHECKED:

DATE:

PART NO.

GWFC201-XXXXA001DXBX

APPROVED:

DATE:

