

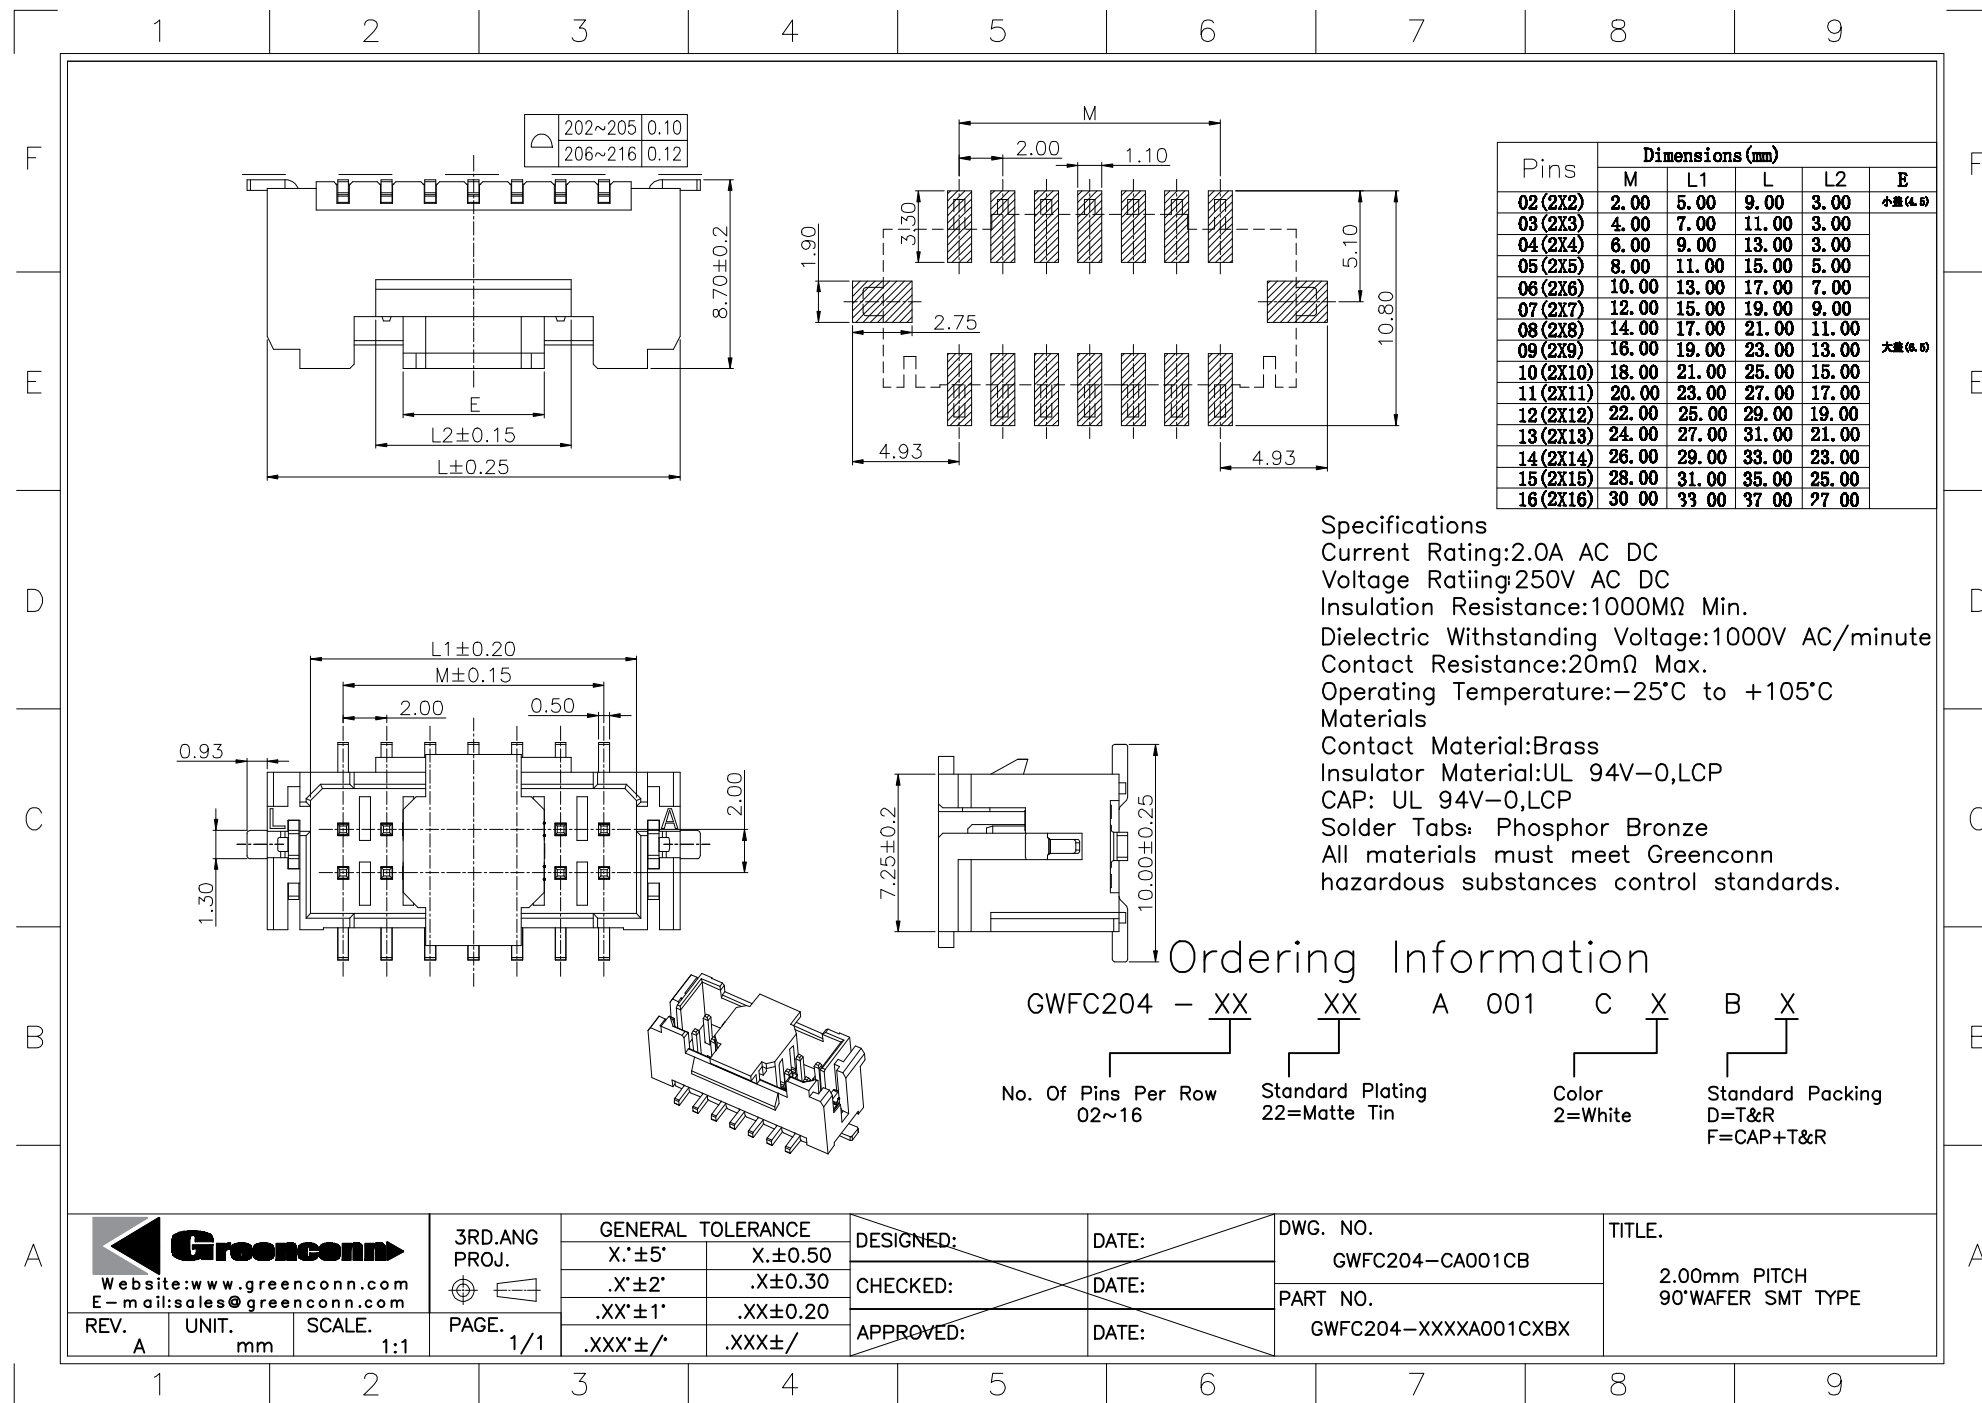
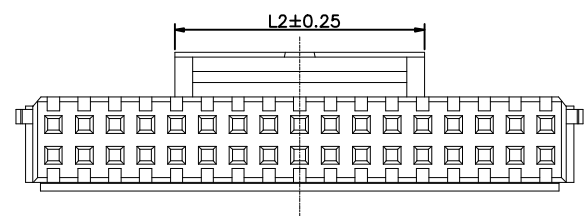

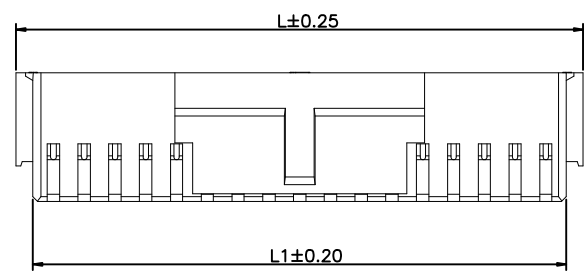


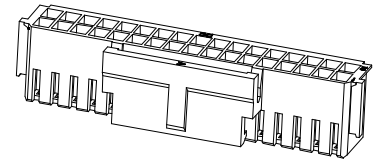

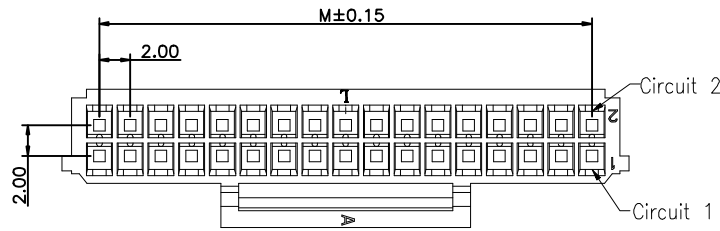

Specifications
 Current Rating:3.0A AC DC
 Voltage Rating:250V AC DC
 Insulation Resistance: $\geq 1000M\Omega$ Min.
 Dielectric Withstanding Voltage:1000V AC/minute
 Contact Resistance: $\leq 30m\Omega$ Max.
 Operating Temperature:-25°C to +85°C
Materials
 Insulation Material:UL94V-0 NYLON 66
 All materials must meet GREENCONN
 hazardous substances control standards.

No. of PIN/ROW	Dim M	Dim L1	Dim L	Dim L2
02	2.00	4.65	6.90	3.20
03	4.00	6.65	8.90	3.20
04	6.00	8.65	10.90	5.50
05	8.00	10.65	12.90	5.50
06	10.00	12.65	14.90	5.50
07	12.00	14.65	16.90	5.50
08	14.00	16.65	18.90	11.00
09	16.00	18.65	20.90	11.00
10	18.00	20.65	22.90	11.00
11	20.00	22.65	24.90	11.00
12	22.00	24.65	26.90	11.00
13	24.00	26.65	28.90	11.00
14	26.00	28.65	30.90	16.20
15	28.00	30.65	32.90	16.20
16	30.00	32.65	34.90	16.20
17	32.00	34.65	36.90	16.20
18	34.00	36.65	38.90	16.20

Ordering Information

GWF252 - XX A P1

No. of Pins per Row
02~18

Material Color
P1=NYLON 66/White

Greenconn
 Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG
PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.±5.0'	X.±0.50
.X'±2.0'	.X±0.30
.XX'±1.0'	.XX±0.20
.XXX'±/	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
GWF252-HA
PART NO.
GWF252-XXAP1

TITLE.
2.0mm pitch Housing

