
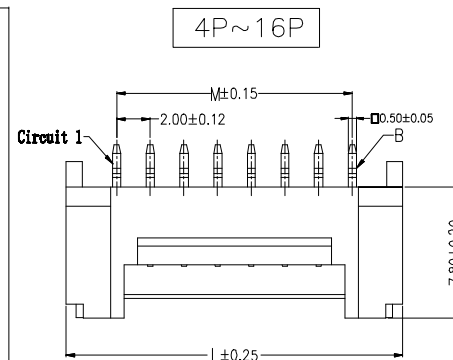
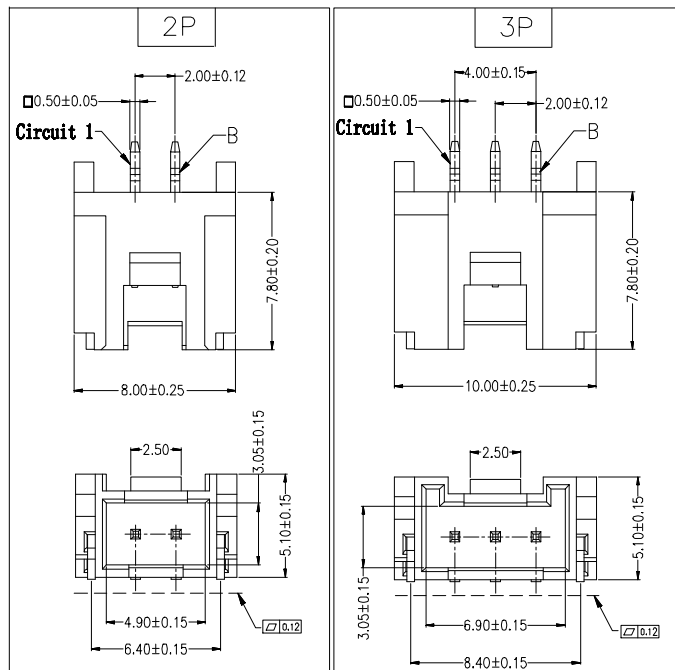


P.C.B LAYOUT

NOTES:
 CURRENT RATING:3A AC/DC.
 VOLTAGE RATING:250V AC/DC
 TEMPERATURE RANGE:-40°C~+105°C.
 CONTACT RESISTANCE:30mΩ Max.
 INSULATION RESISTANCE:1000MΩ Min.
 WITHSTANDING VOLTAGE: 1000V AC/MINUTE.

Materials
 Contact Material:Brass
 Insulator Material: LCP UL 94V-0

No.of Pin/Row	Dimensions(mm)	
	L	M
02	8.00	2.00
03	10.00	4.00
04	12.00	6.00
05	14.00	8.00
06	16.00	10.00
07	18.00	12.00
08	20.00	14.00
09	22.00	16.00
10	24.00	18.00
11	26.00	20.00
12	28.00	22.00
13	30.00	24.00
14	32.00	26.00
15	34.00	28.00
16	36.00	30.00



Ordering Information

G WFD111-XX XX A 002 C X B X

No. of Pins per Row 02~16 Standard Plating 01=Tin Selective Plating 02=Gold Flash 22=Matte Tin Color 1=Black 2=White Standard Packing D=Tape&Reel



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1
 3RD.ANG PROJ. PAGE. 1/1

GENERAL TOLERANCE

X.'±3.0'	X.±/
.X'±2.0'	.X±0.30
.XX'±1.5'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.








GWFD111-CA002

PART NO.


GWFD111-XXXXA002CXBX

TITLE.

2.00mm Pitch SMT Wafer

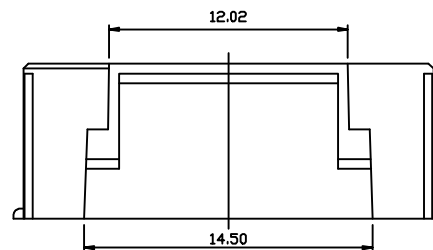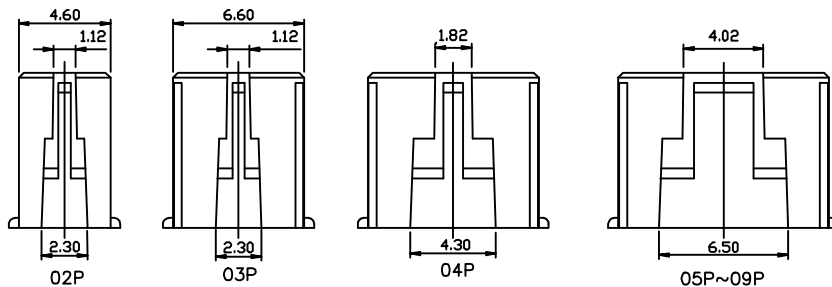

大于03P



Specifications:
Current rating: **3A** AC/DC.
Voltage rating: **250V** AC/DC
Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$.
Contact resistance: **30m Ω** Max.
Insulation resistance: **1000M Ω** Min.
Withstanding voltage: **1000V** AC/minute.
Material: **Nylon66** UL94V-0.

No. of Pin	Dimensions		
	M	L	L1
02P	2.00	4.60	5.60
03P	4.00	6.60	7.60
04P	6.00	8.60	9.60
05P	8.00	10.60	11.60
06P	10.00	12.60	13.60
07P	12.00	14.60	15.60
08P	14.00	16.60	17.60
09P	16.00	18.60	19.60
10P	18.00	20.60	21.60
11P	20.00	22.60	23.60
12P	22.00	24.60	25.60
13P	24.00	26.60	27.60
14P	26.00	28.60	29.60
15P	28.00	30.60	31.60
16P	30.00	32.60	33.60

GHF571 - XX

A

X

No. of Pin/Row
02 ~16

Material/Color

M=NYLON 66/White


NF=NYLON 66/Transparent



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X: $\pm$ / X: $\pm$ /

.X: $\pm$ / .X: $\pm$ 0.25

.XX: $\pm$ / .XX: $\pm$ 0.15

.XXX: $\pm$ / .XXX: $\pm$ 0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GHF571-HA

PART NO.

GHF571-XXAX

TITLE.

2.00mm pitch housing

