


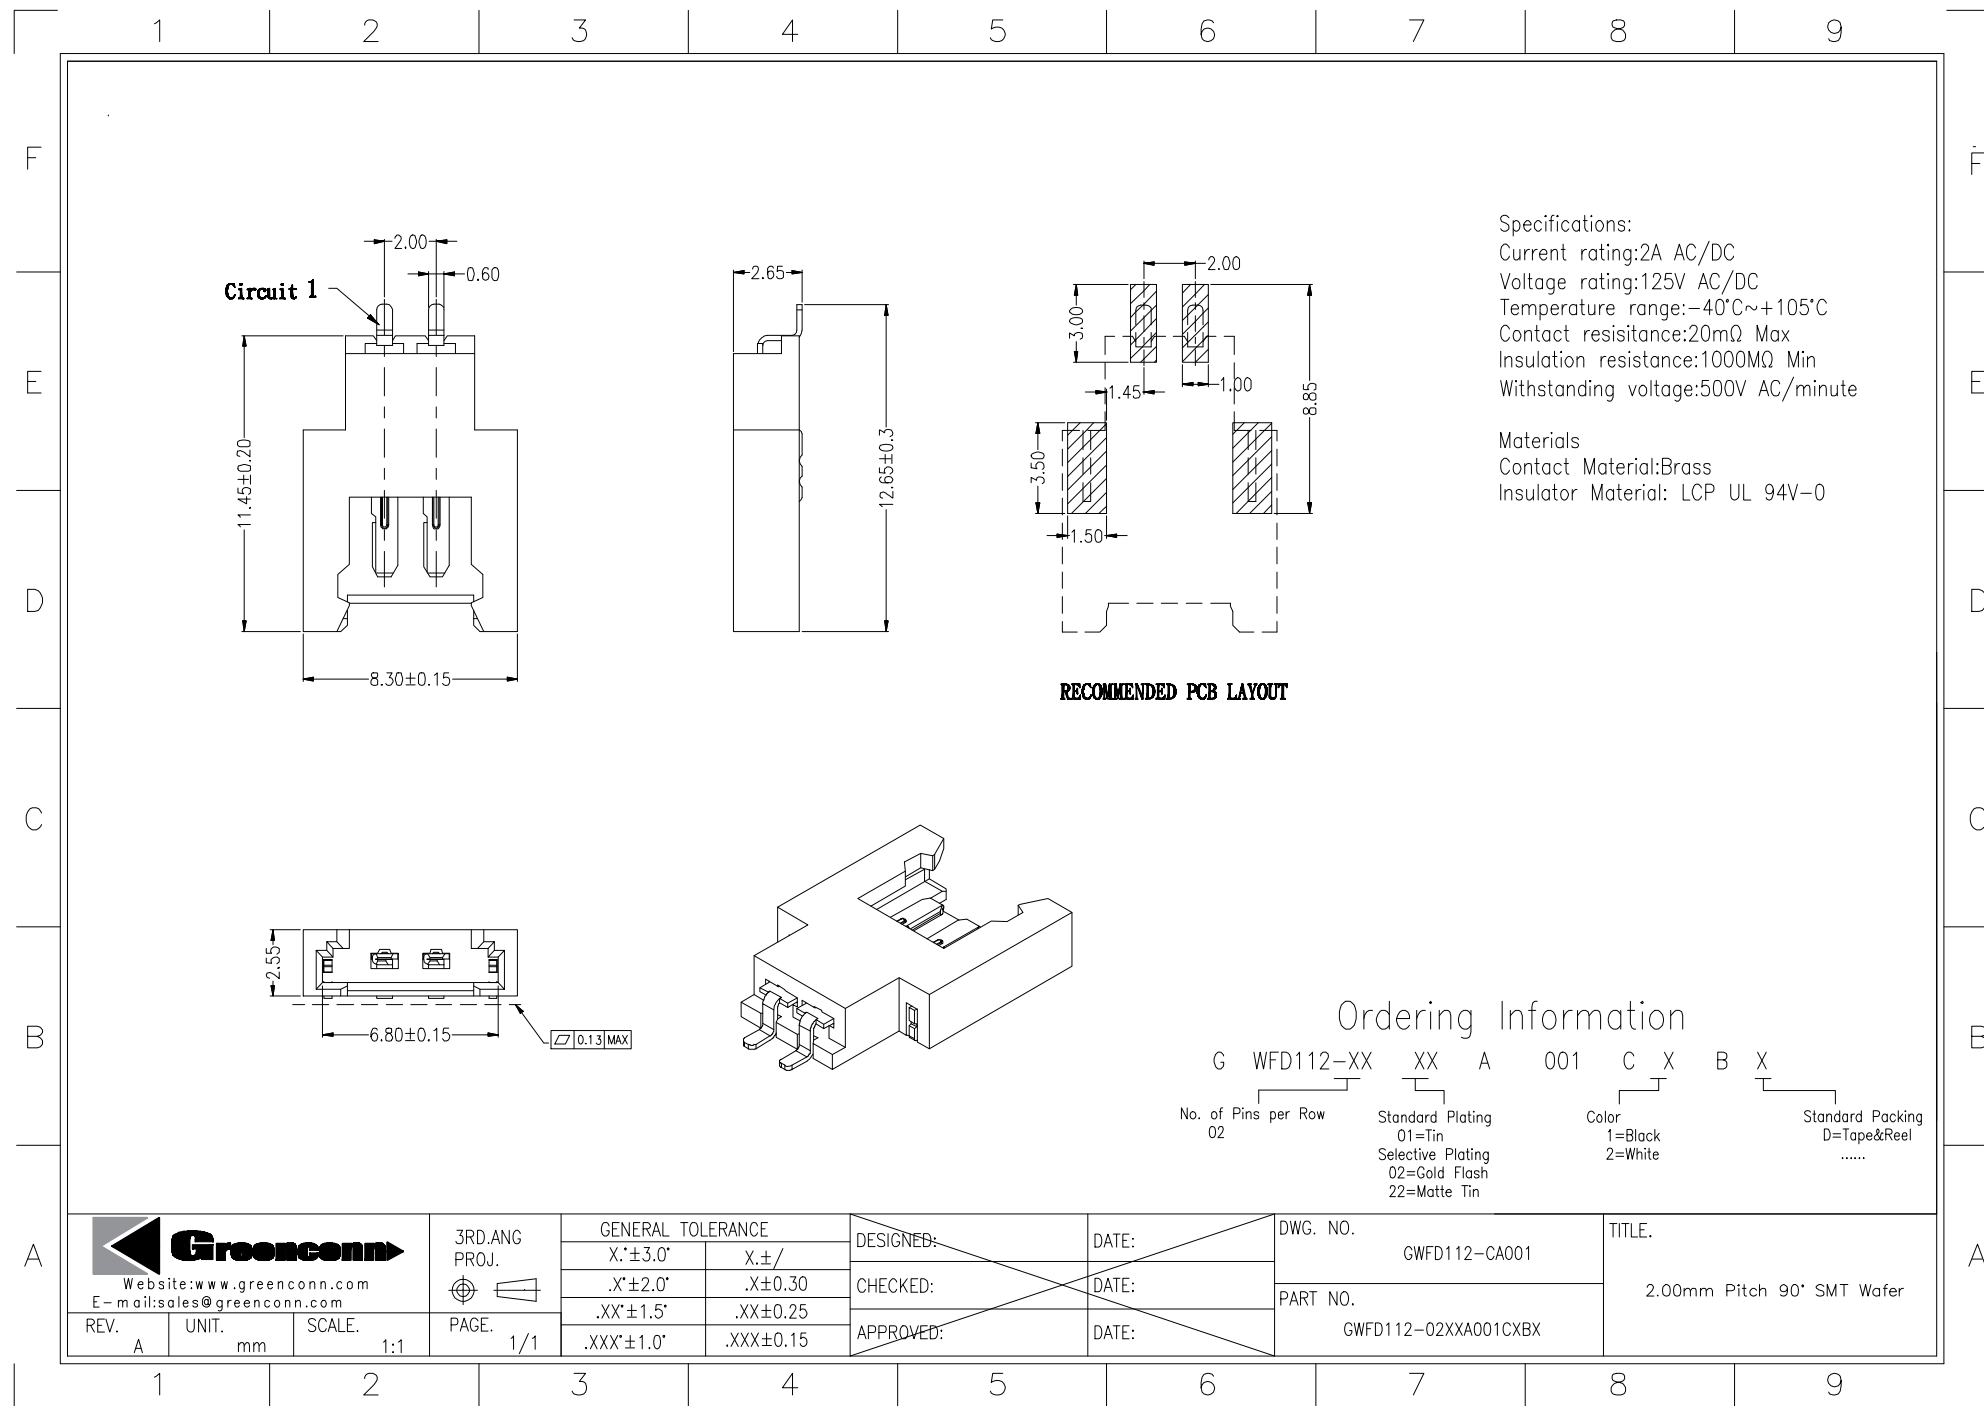
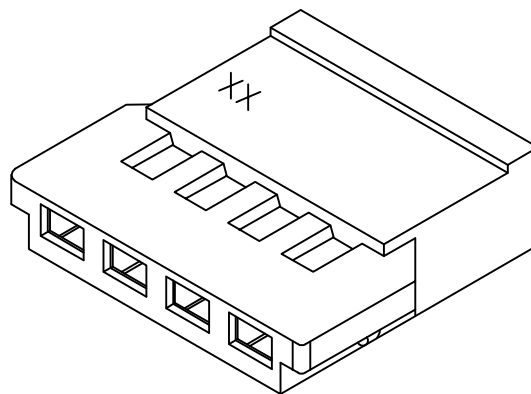


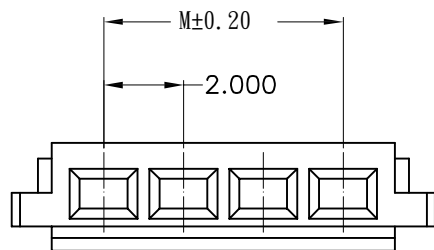

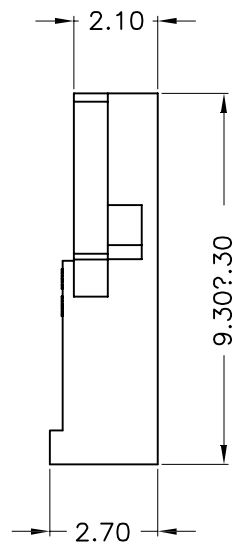

Specifications:
Current rating:2A AC/DC.
Voltage rating:125V AC/DC
Temperature range:-40°C~+105°C.
Contact resistance:20mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 500V AC/minute.
Material: NYLON66 UL94V-0

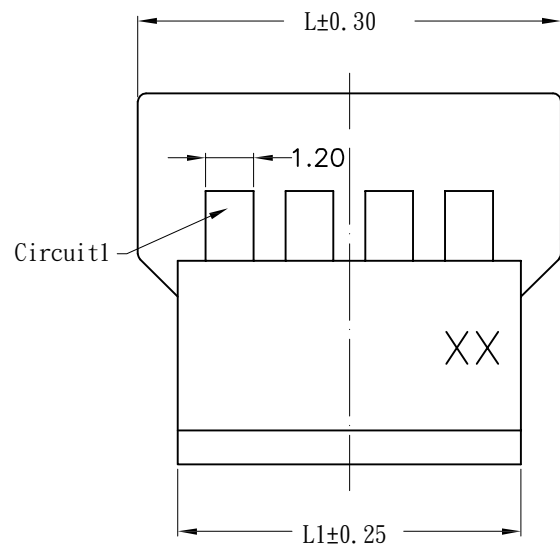

No of Pin/Row	Dimensions (mm)			No of Pin/Row	Dimensions (mm)		
	M	L	L1		M	L	L1
02	2.00	6.70	4.60	12	22.00	26.70	24.60
03	4.00	8.70	6.60	13	24.00	28.70	26.60
04	6.00	10.70	8.60	14	26.00	30.70	28.60
05	8.00	12.70	10.60	15	28.00	32.70	30.60
06	10.00	14.70	12.60	16	30.00	34.70	32.60
07	12.00	16.70	14.60	17	32.00	36.70	34.60
08	14.00	18.70	16.60	18	34.00	38.70	36.60
09	16.00	20.70	18.60	19	36.00	40.70	38.60
10	18.00	22.70	20.60	20	38.00	42.70	40.60
11	20.00	24.70	22.60				

備注：7~20PIN需要做工件

GHH261 - XX

A

X

No. of Pin/Row
02 ~ 20

Material/Color

M=NYLON 66/White
M1=NYLON 66/Black
M2=NYLON 66/Brown



3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X停 /	.X?.30
.XX停 /	.XX?.20
.XXX停 /	.XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.



GHH261-HA

PART NO.





GHH261-XXAX

TITLE.

2.0mm pitch housing

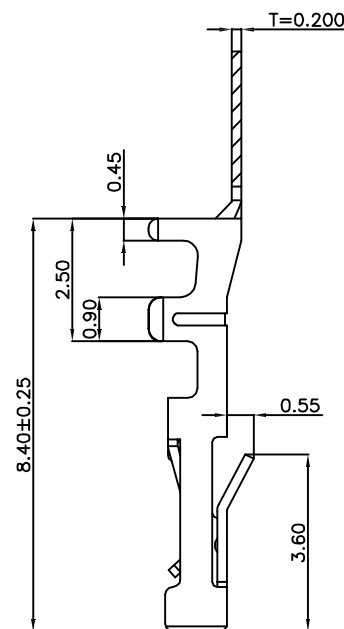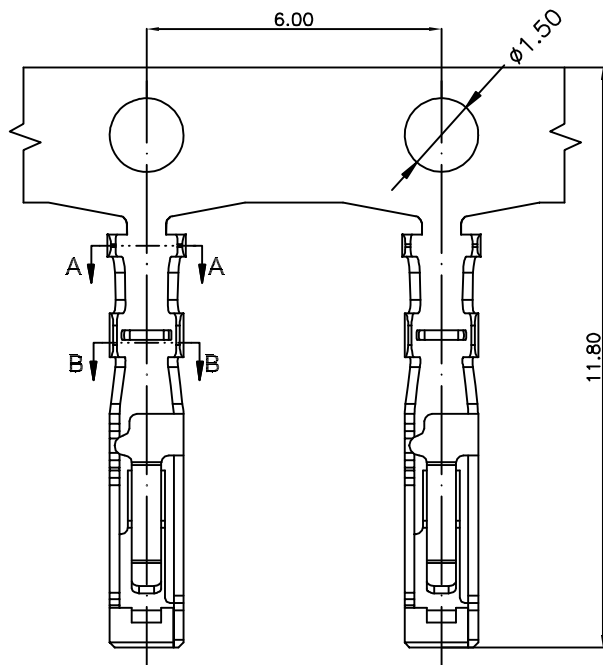

Specifications:
 Material: Phosphor Bronze
 Wire range: AWG#24-28
 Insulation O.D: 1.40mm(max)
 Qty/reel:10000PCS

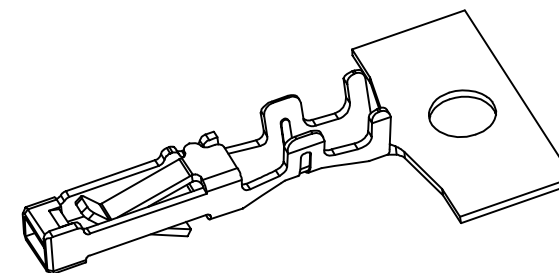

Ordering Information

GRF149 - 01 XX XX

Standard Plating
 01=Tin
 02=Gold flash


Materials
 AB=Phosphor Bronze



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
 PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X停 /	.X?.35
.XX停 /	.XX?.25
.XXX停 /	.XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GRF149-T1

PART NO.

GRF149-01 XX AB

TITLE.

2.00mm Pitch Terminal