

1 2 3 4 5 6 7 8 9

F





E

D

C

B

A

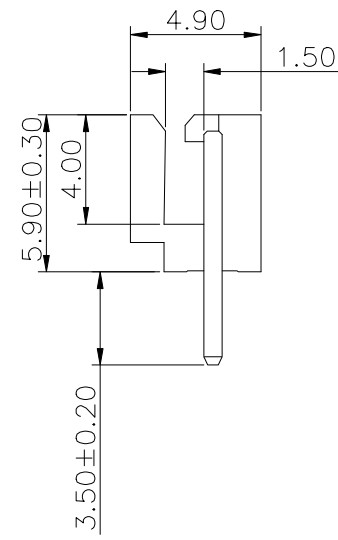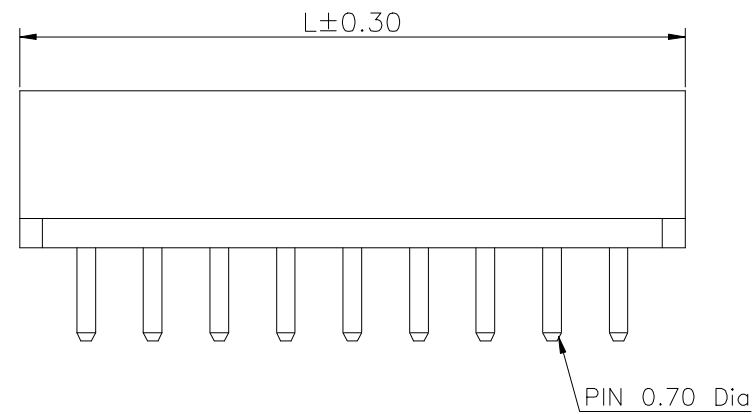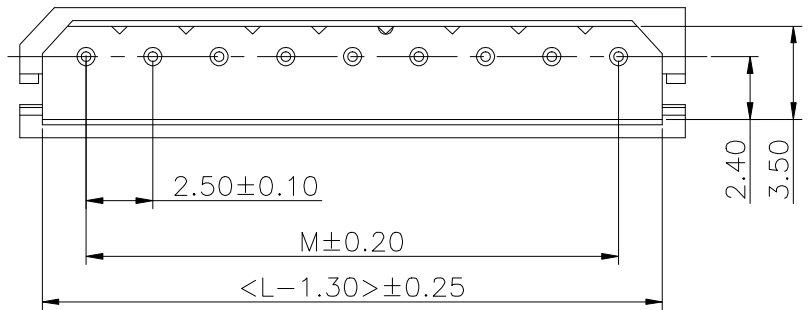

Specifications
Current Rating: 3.0Amp (AC/DC)
Voltage Rating: 250V(AC/DC)
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 800V AC/Minute
Contact Resistance: 20mΩ Max.
Operating Temperature:-25°C to +80°C
Materials
Contact Material: Brass
Insulator Material:Thermoplastic,UL 94V-0
Nylon 66 or the equivalent material
All materials must meet Greenconn
requirement for environment protection.

Ordering Information
G WGA106 - XX XX A 002 E X B X
No. of Pins per Row 02~16
Standard Plating 01=Tin
Color 1=BLACK 2=White
Standard Packing A=box
Selective Packing C=Tube

No. of PIN/ROW	Dimension Information	
	M	L
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:

DWG. NO. GWGA106-CA2EB
PART NO. GWGA106-XXXX A002EXBX

TITLE. WAFER FOR PITCH 2.50 STRAIGHT
--

REV. 03	UNIT. mm	SCALE. 4:1	PAGE. 1/1
------------	-------------	---------------	--------------

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A