


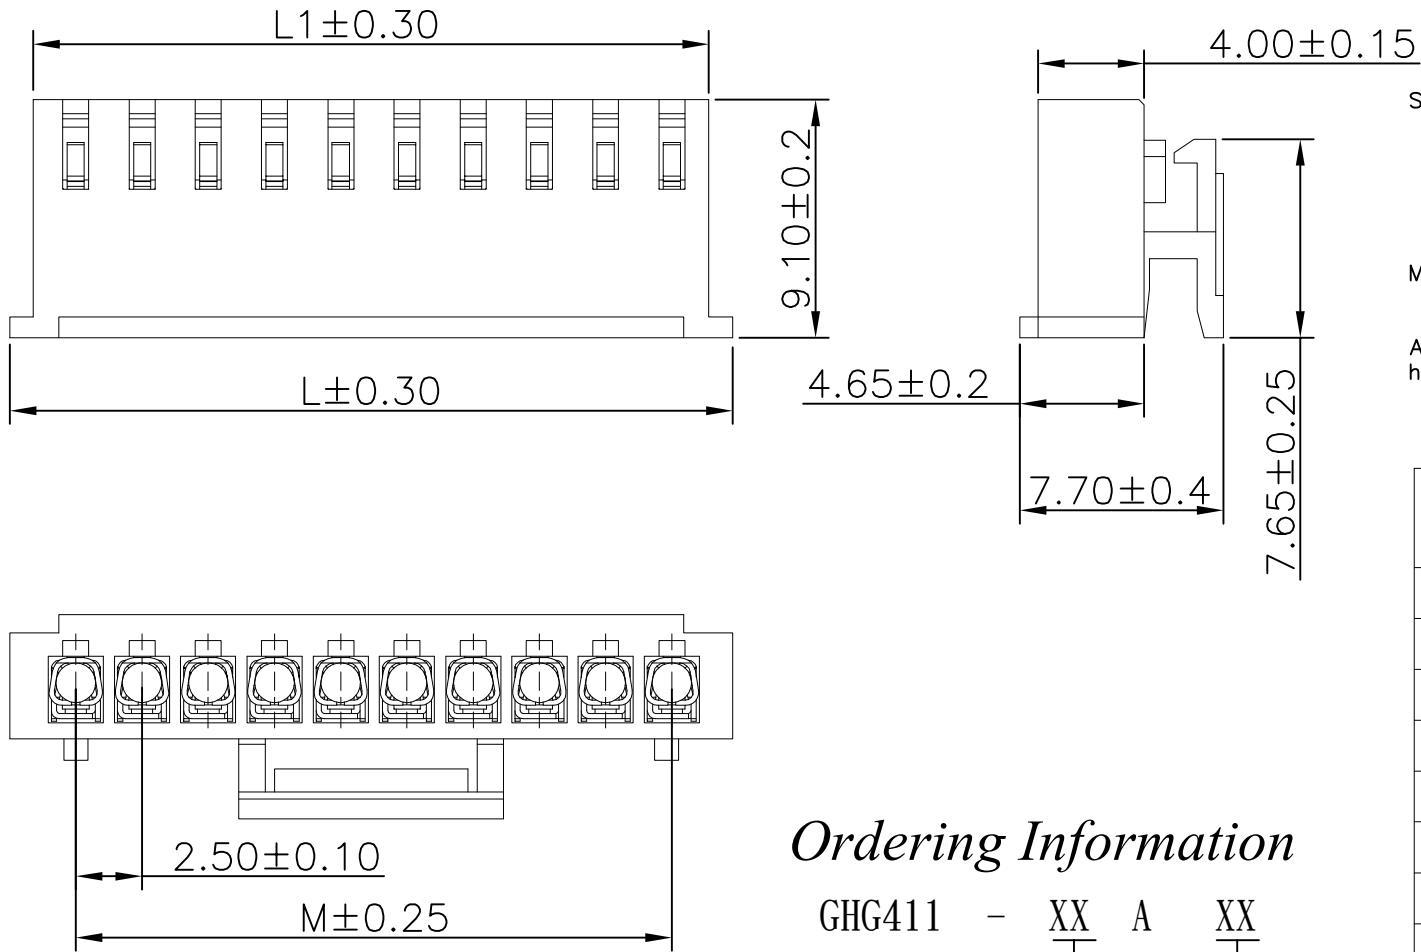

Specifications

Current Rating: 3.0A AC
 Current Voltage: 250V AC
 Dielectric Withstanding Voltage: 1000VAC
 Insulation Resistance: $\geq 1000M\Omega$
 Contact Resistance: $\leq 20m\Omega$
 Operating Temperature: $25^{\circ}C$ to $+85^{\circ}C$

Materials

Insulation Material: Nylon-66, UL94V-0
 Mating Terminal: GRG132-T1
 All materials must meet Greenconn hazardous substances control standards.

No. of Pins/Row	Dimensions Information		
	M	L1	L
02	2.50	5.75	7.25
03	5.00	8.25	9.75
04	7.50	10.75	12.25
05	10.00	13.25	14.75
06	12.50	15.75	17.25
07	15.00	18.25	19.75
08	17.50	20.75	22.25
09	20.00	23.25	24.75
10	22.50	25.75	27.25
11	25.00	28.25	29.75
12	27.50	30.75	32.25

Ordering Information

GHG411 - XX A XX


No. of Pins Per Row 02~12
 Materials /Color M=Nylon-66/White



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.* $\pm 5^{\circ}$	X.* ± 0.50
.X.* $\pm 2^{\circ}$	.X.* ± 0.30
.XX.* $\pm 1^{\circ}$	.XX.* ± 0.20
.XXX.* $\pm 1^{\circ}$	.XXX.* ± 0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GHG411-HA

PART NO.

GHG411-XXAXX

TITLE.

2.50mm PITCH Housing

F

E

D

C

B

A

F



E

D

C

B

A

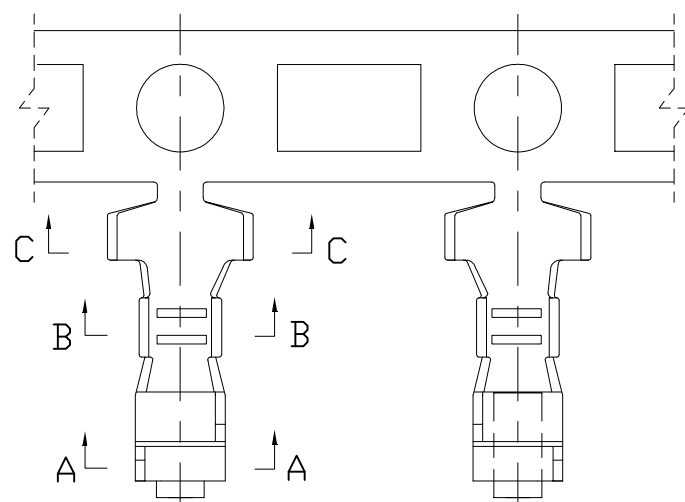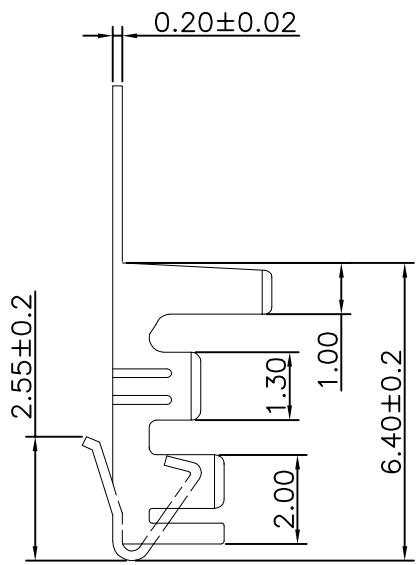


Specifications


- Current Rating: 3.0A AC
- Current Voltage: 250V AC
- Contact Resistance: ≤20mΩ
- Operating Temperature: 25°C to +85°C
- Wire Range: AWG#22~#28
- Insulation O.D. : 1.90mm(max)

Materials


Terminal Material: Phosphor Bronze
Mating Housing: GHG411-HA
All materials must meet Greenconn hazardous substances control standards.



A-A



B-B



C-C

Ordering Information

GRG132 - 01 XX XX

Standard Plating
01=Tin

Materials
AB=Phosphor bronze



3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5°	X.±0.50
.X*±2°	.X±0.30
.XX*±1°	.XX±0.20
.XXX*±/'	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	GRG132-T1
PART NO.	GRG132-01XXAB

TITLE.	2.50mm PITCH Terminal
--------	-----------------------