
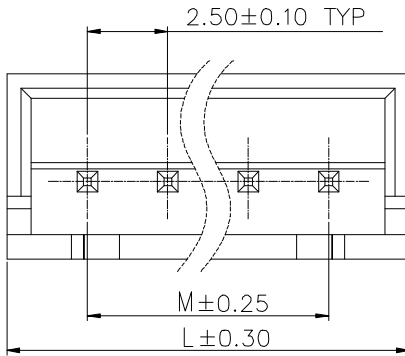
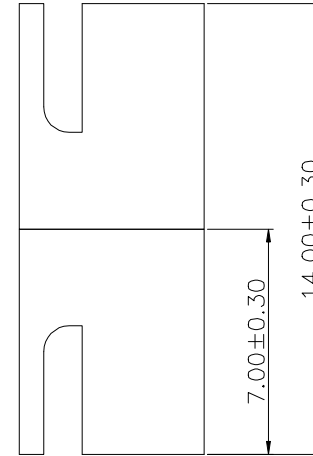
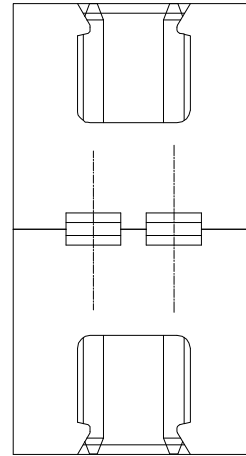


2P 示图

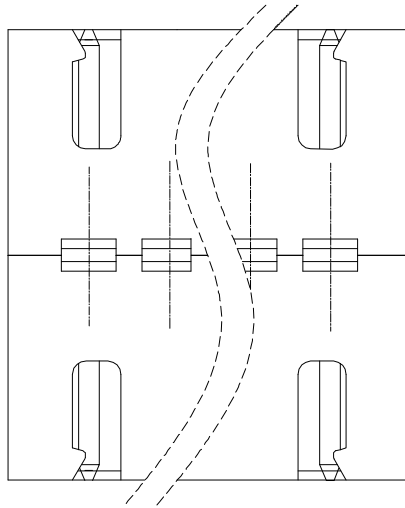

Specifications:
 Current rating:3A AC/DC.
 Voltage rating:250V AC/DC
 Temperature range:−40°C~+105°C.
 Contact resistance:10mΩ Max.
 Insulation resistance:1000MΩ Min.
 Withstanding voltage: 800V AC/minute.

MATERIAL:
 Housing:PA66 UL94V-0
 Contact:Copper Alloy

No. of pin/row	Dimensions	
	L	M
02	7.50	2.50
03	10.00	5.00
04	12.50	7.50
05	15.00	10.00
06	17.50	12.50
07	20.00	15.00
08	22.50	17.50
09	25.00	20.00
10	27.50	22.50
11	30.00	25.00
12	32.50	27.50
13	35.00	30.00
14	37.50	32.50
15	40.00	35.00
16	42.50	37.50
17	52.50	47.50

Ordering Information

G WGZ101-XX XX A 001 E X B X

No. of Pins per Row
02~17

Standard Plating
01=Tin
Selective Plating
02=Gold Flash
22=Matte Tin
...

Color
1=Black
2=White
...


Standard Packing
N=PE Bag
...



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
PROJ.



GENERAL TOLERANCE

X.±3.0°	X.±/
.X°±2.0°	.X±0.30
.XX°±1.5°	.XX±0.25
.XXX°±1.0°	.XXX±0.15

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

GWGZ101-CA001

PART NO.

GWGZ101-XXXXA001EXBX

TITLE.

2.50mm pitch wafer
 连体针座