

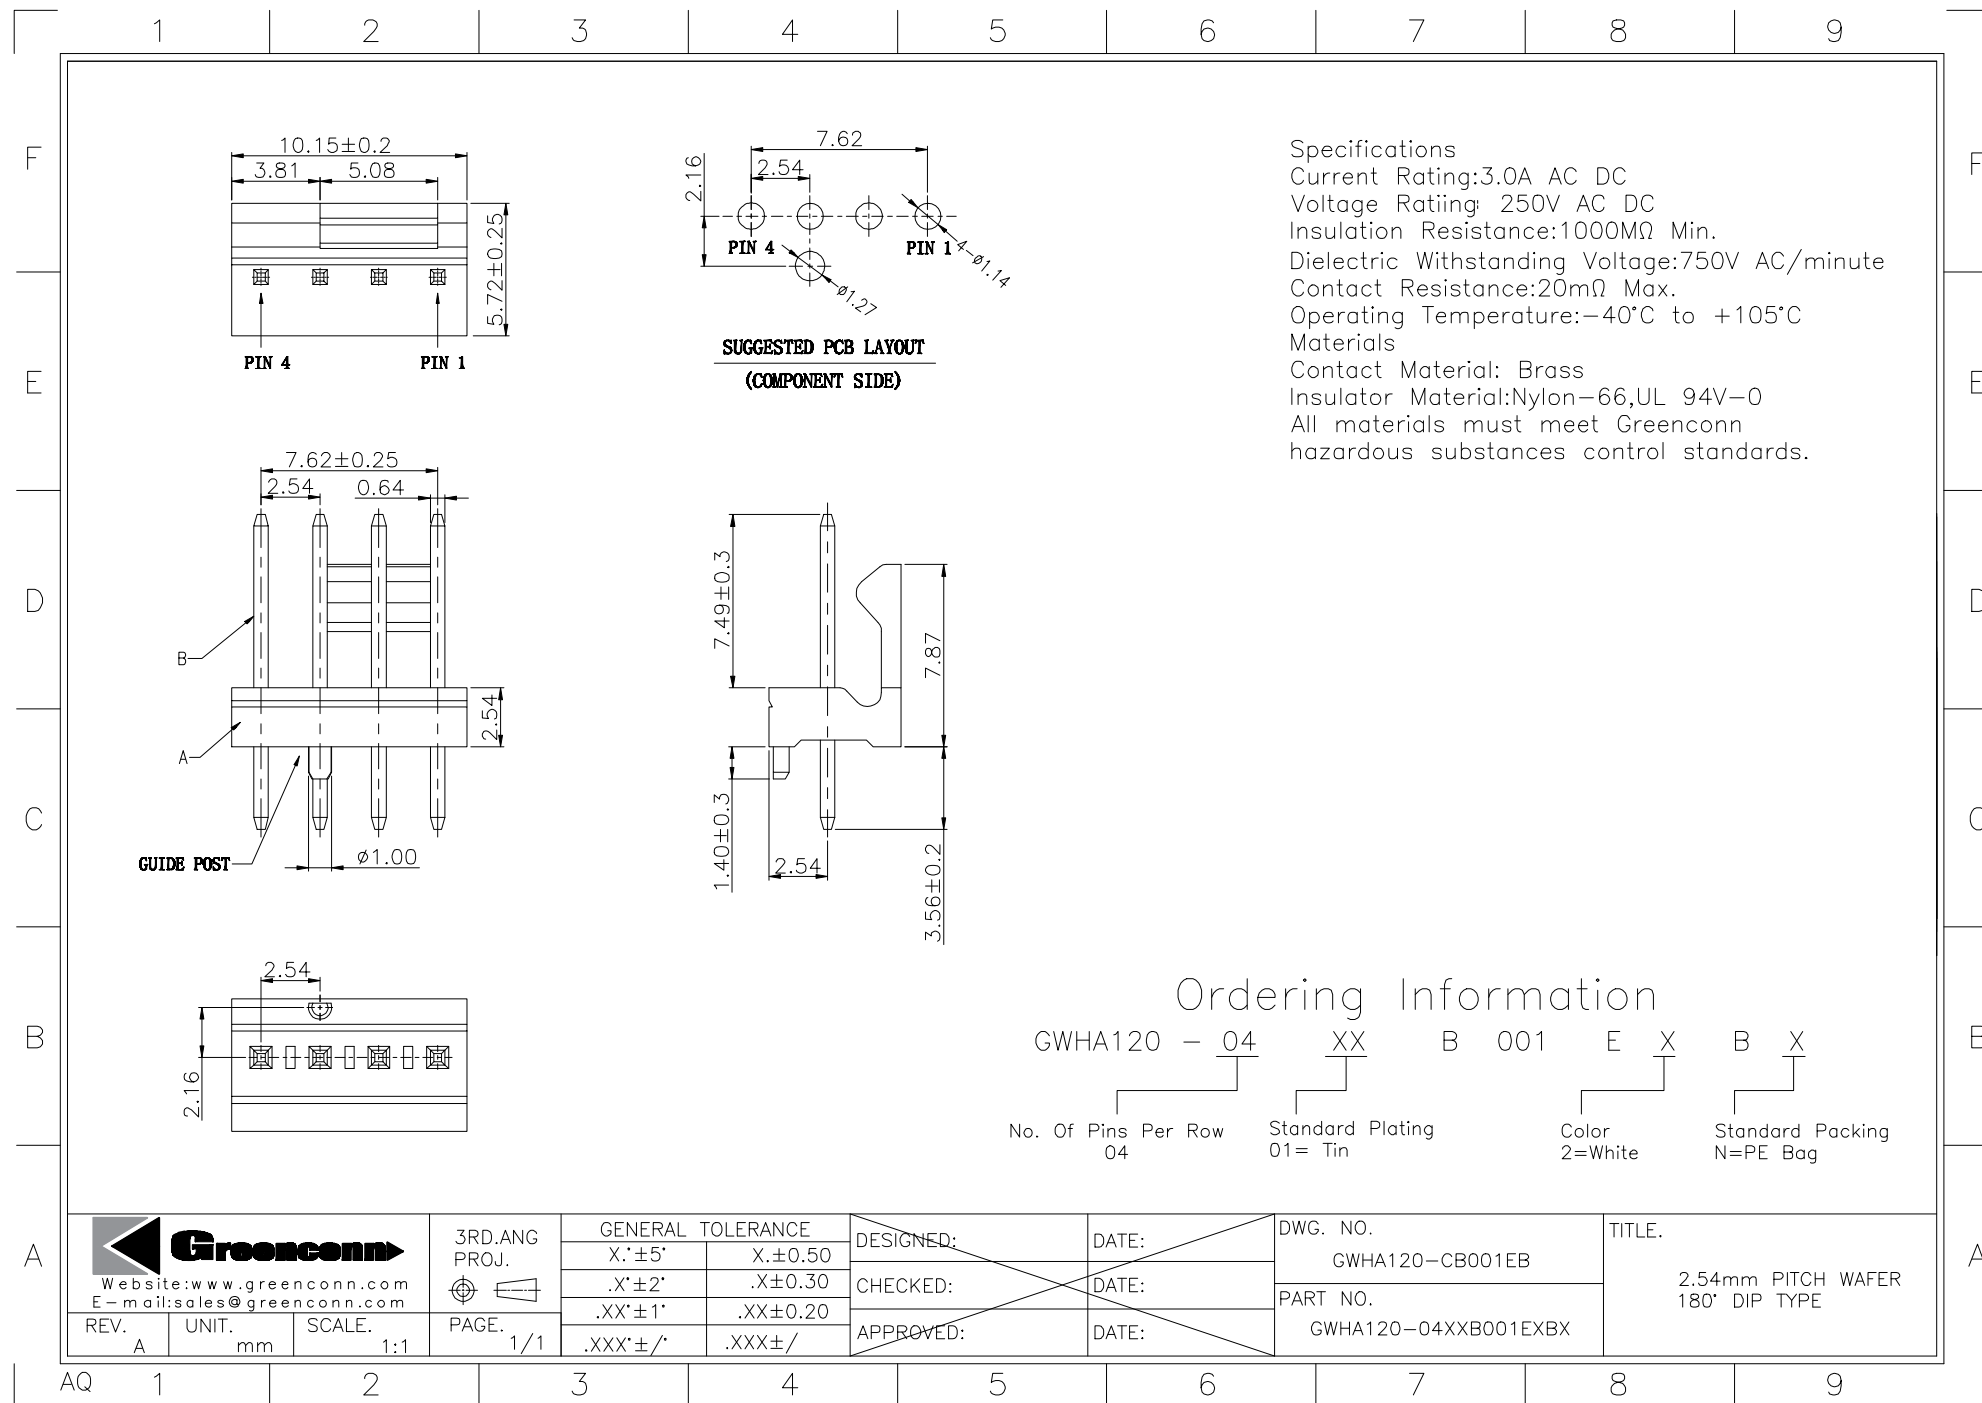


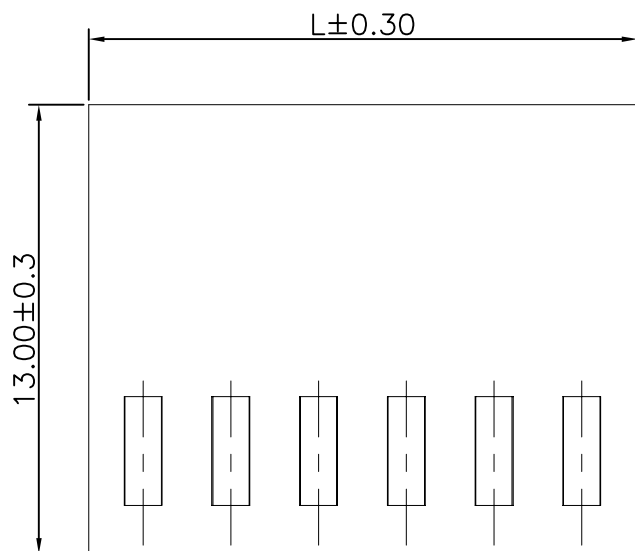

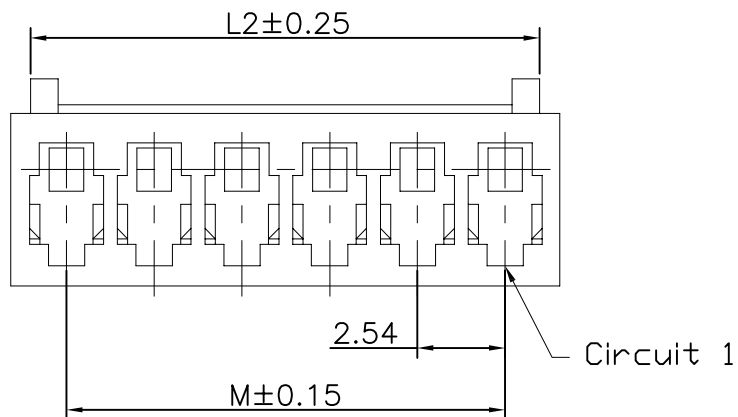


#### Specifications

Current Rating: 3.0A AC  
 Current Voltage: 250V AC  
 Dielectric Withstanding Voltage: 1000VAC  
 Insulation Resistance:  $\geq 1000M\Omega$   
 Contact Resistance:  $\leq 20m\Omega$   
 Operating Temperature:  $-25^{\circ}C$  to  $+85^{\circ}C$

#### Materials

Insulation Material: Nylon-66, UL94V-2  
 Mating Terminal: GRH154-T1  
 All materials must meet Greenconn hazardous substances control standards.

| No. of Pins/Row | Dimensions Information |       |       |
|-----------------|------------------------|-------|-------|
|                 | M                      | L2    | L     |
| 02              | 2.54                   | 4.58  | 5.74  |
| 03              | 5.08                   | 7.12  | 8.28  |
| 04              | 7.62                   | 9.66  | 10.28 |
| 05              | 10.16                  | 12.20 | 13.36 |
| 06              | 12.70                  | 14.74 | 15.90 |
| 07              | 15.24                  | 17.28 | 18.44 |
| 08              | 17.78                  | 19.82 | 20.98 |
| 09              | 30.32                  | 22.36 | 23.52 |
| 10              | 22.86                  | 24.90 | 26.06 |
| 11              | 25.40                  | 27.44 | 28.60 |
| 12              | 27.94                  | 29.98 | 31.14 |
| 13              | 30.48                  | 32.52 | 33.68 |
| 14              | 33.02                  | 35.06 | 36.22 |
| 15              | 35.56                  | 37.60 | 38.76 |

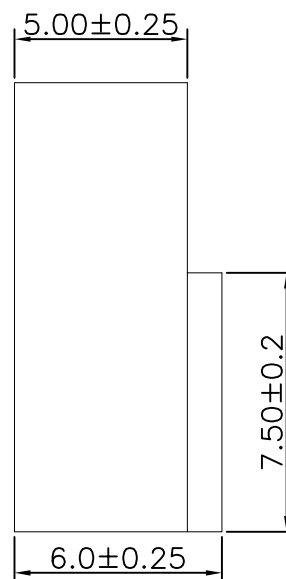

## Ordering Information

GHH291 - XX A XX


No. of Pins Per Row 02~15  
 Materials /Color V=Nylon-66/Beige



Website: [www.greenconn.com](http://www.greenconn.com)  
 E-mail: [sales@greenconn.com](mailto:sales@greenconn.com)

REV. A UNIT. mm SCALE. 1:1

3RD. ANG PROJ.



PAGE. 1/1

#### GENERAL TOLERANCE

|          |          |
|----------|----------|
| X.*±5°   | X.±0.50  |
| .X°±2°   | .X±0.30  |
| .XX°±1°  | .XX±0.20 |
| .XXX°±/° | .XXX±/   |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.


GHH291-HA

PART NO.

GHH291-XXAXX

TITLE.

2.54mm PITCH Housing

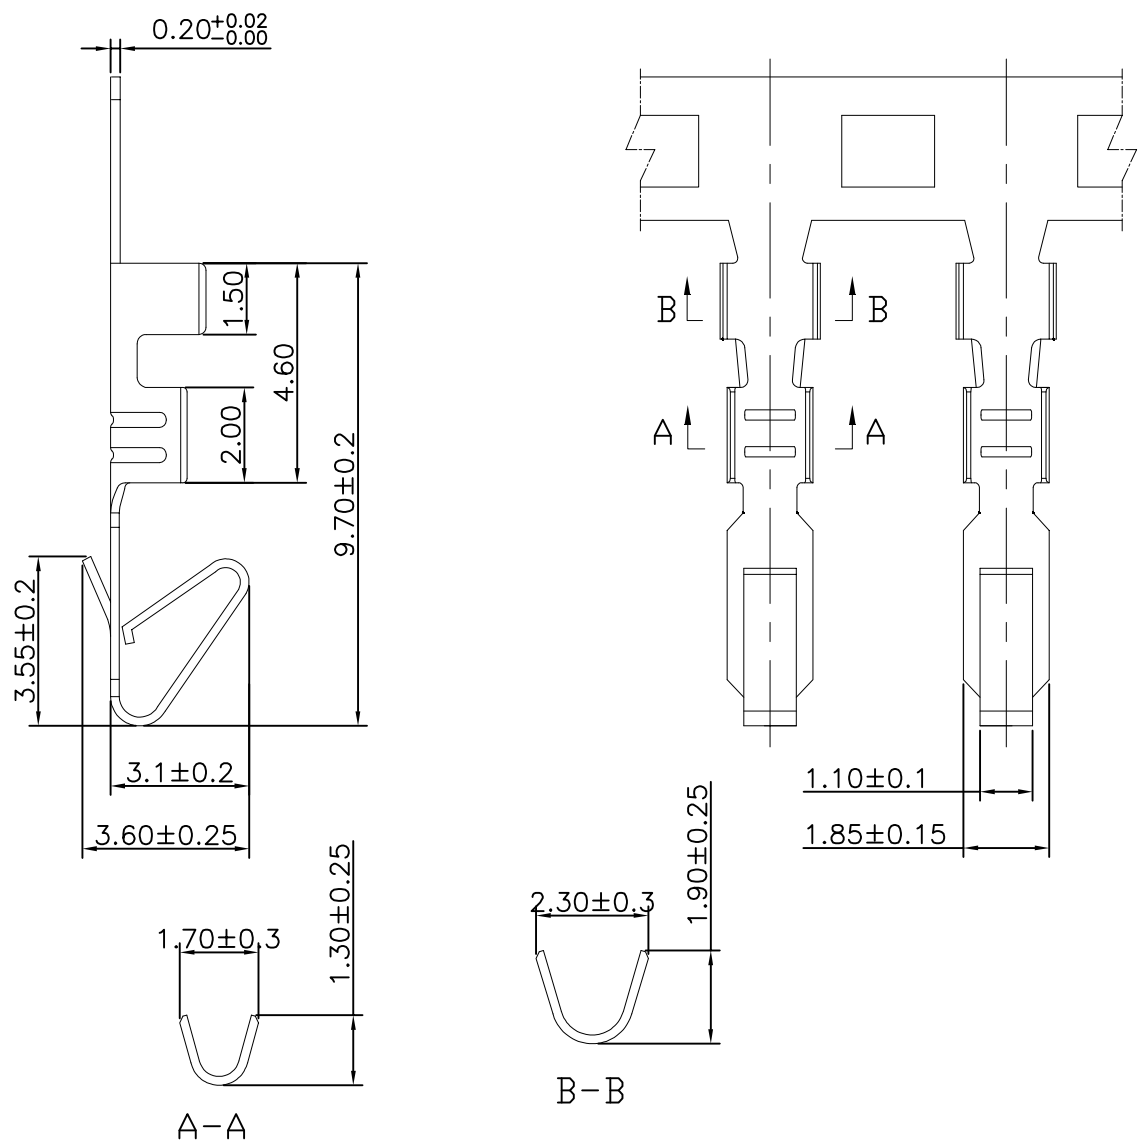

Specifications  
Current Rating: 3.0A AC  
Current Voltage: 250V AC  
Contact Resistance: ≤20mΩ  
Operating Temperature: -25°C to +85°C  
Wire Rang: AWG#22~#30  
Insulation O.D. : 1.6mm(MAX)  
Materials  
Terminal Material: Phosphor Bronze  
Mating Housing: GHH291-HA  
All materials must meet Greenconn hazardous substances control standards.


Ordering Information

GRH154 - 01 XX XX  
Standard Plating 01=Tin  
Materials AB=Phosphor bronze



Website: [www.greenconn.com](http://www.greenconn.com)  
E-mail: [sales@greenconn.com](mailto:sales@greenconn.com)

|      |       |        |
|------|-------|--------|
| REV. | UNIT. | SCALE. |
| A    | mm    | 1:1    |

3RD.ANG  
PROJ.  


PAGE.  
1/1

| GENERAL TOLERANCE |          |
|-------------------|----------|
| X.*±5°            | X.±0.50  |
| .X.*±2°           | .X±0.30  |
| .XX.*±1°          | .XX±0.20 |
| .XXX.*±/°         | .XXX±/   |

|           |       |
|-----------|-------|
| DESIGNED: | DATE: |
| CHECKED:  | DATE: |
| APPROVED: | DATE: |

|               |
|---------------|
| DWG. NO.      |
| GRH154-T1     |
| PART NO.      |
| GRH154-01XXAB |

|                       |
|-----------------------|
| TITLE.                |
| 2.54mm PITCH Terminal |