

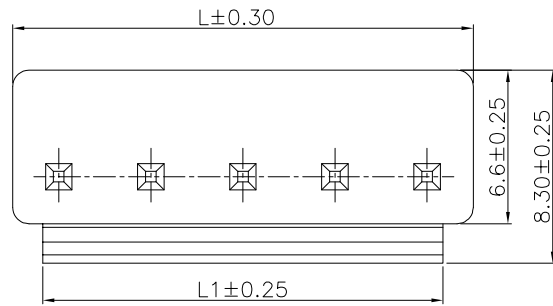
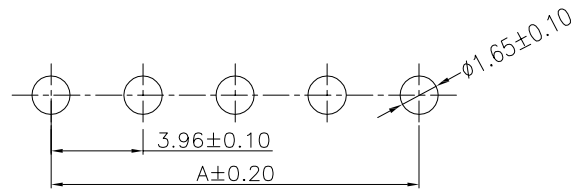
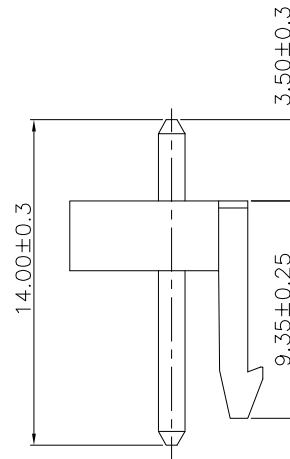


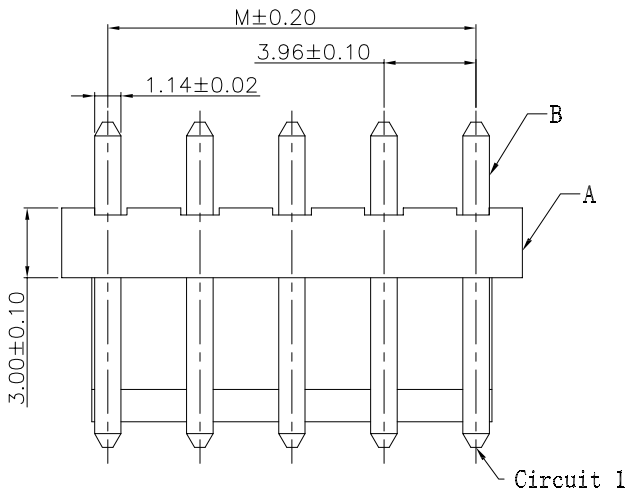

Specifications
Current Rating:7.0A AC DC
Voltage Rating: 250V AC DC
Insulation Resistance:1000MΩ Min.
Dielectric Withstanding Voltage:1500V AC/minute
Contact Resistance:20mΩ Max.
Operating Temperature:-40°C to +105°C
Materials
Contact Material: Brass
Insulator Material:Nylon-66,UL 94V-0
All materials must meet Greenconn
hazardous substances control standards.



Pins	Dimensions (mm)		
	M	L1	L
02	3.96	5.00	7.94
03	7.92	8.96	11.90
04	11.88	12.92	15.82
05	15.84	16.88	19.82
06	19.80	20.84	23.78
07	23.76	24.80	27.74
08	27.72	28.76	31.70
09	31.68	32.76	35.66
10	35.64	36.68	39.62
11	39.60	40.64	43.58
12	43.56	44.60	47.54
13	47.52	48.56	51.80
14	51.48	52.52	55.46

Ordering Information

GWJA102 - XX XX A 027 E X B X
No. Of Pins Per Row 02~14 Standard Plating 01= Tin Color E=Beige Standard Packing N=PE Bag




3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5°	X.±0.50
.X*±2°	.X±0.30
.XX*±1°	.XX±0.25
.XXX*±/'	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
GWJA102-CA027EB
PART NO.
GWJA102-XXXXA027EXBX

TITLE.
3.96mm PITCH WAFER 180° DIP TYPE

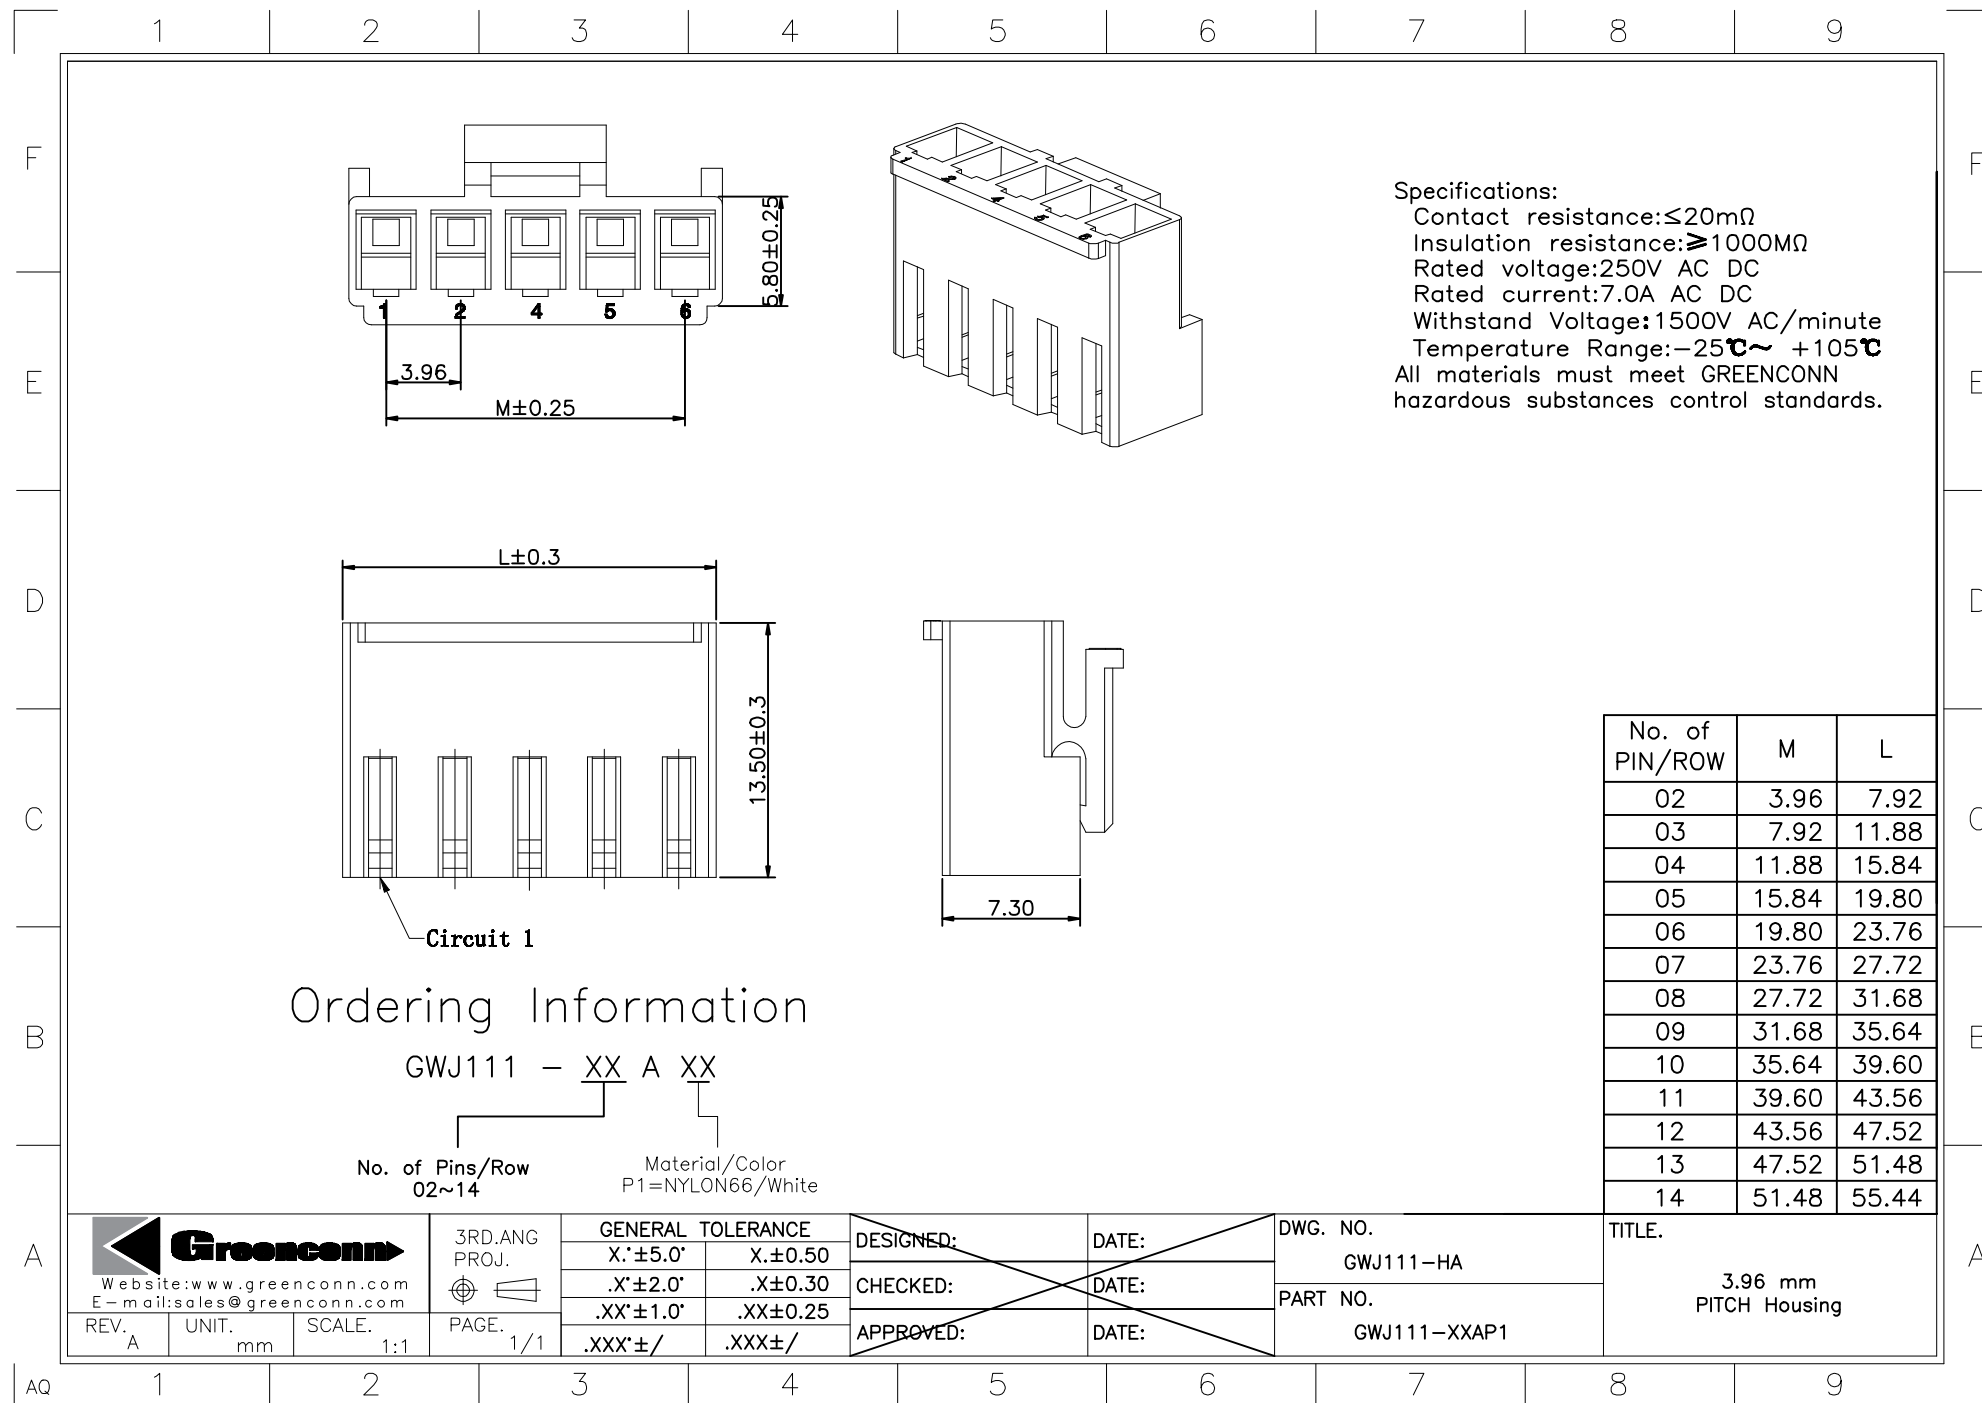

1 2 3 4 5 6 7 8 9

F






E

D

C

B

A

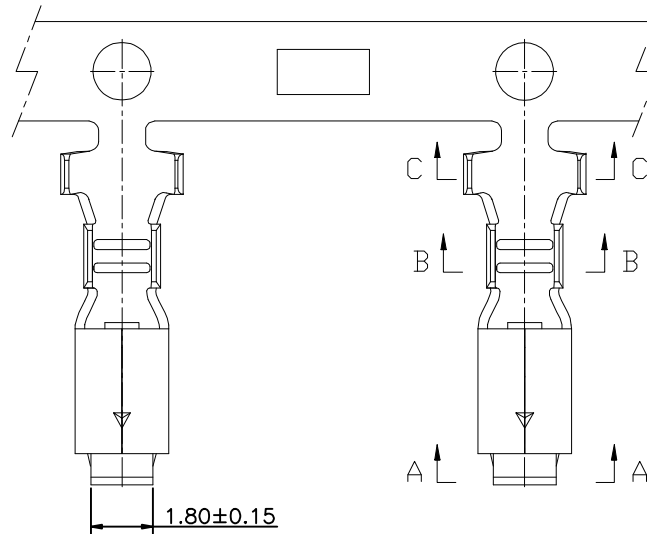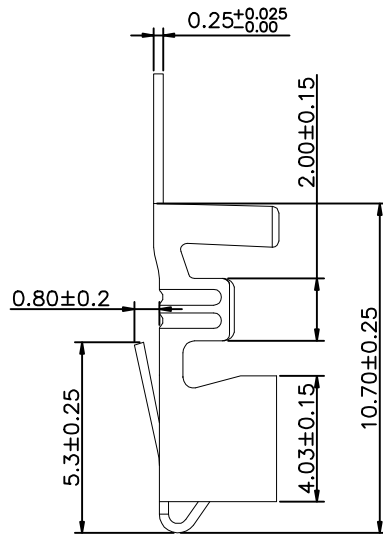

Ordering Information

GRJ108 - 01 XX XX

Standard Plating
01=Tin

Material
AB=Phosphor bronze


Wire Range	Insulation O.D.	Material	Finish
AWG #22~#18	3.00mm(MAX)	Phosphor bronze	Sn-plated



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.	PAGE.
A	mm	1:1	1/1

3RD. ANG
PROJ.



GENERAL TOLERANCE

X. ±5.0'	X. ±0.50
.X' ±2.0'	.X ±0.30
.XX' ±1.0'	.XX ±0.25
.XXX' ±/	.XXX ±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GRJ108-T1

PART NO.

GRJ108-0101AB

TITLE.

3.96 mm PITCH

AQ

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A