

1 2 3 4 5 6 7 8 9

F


E

D

C

B



A

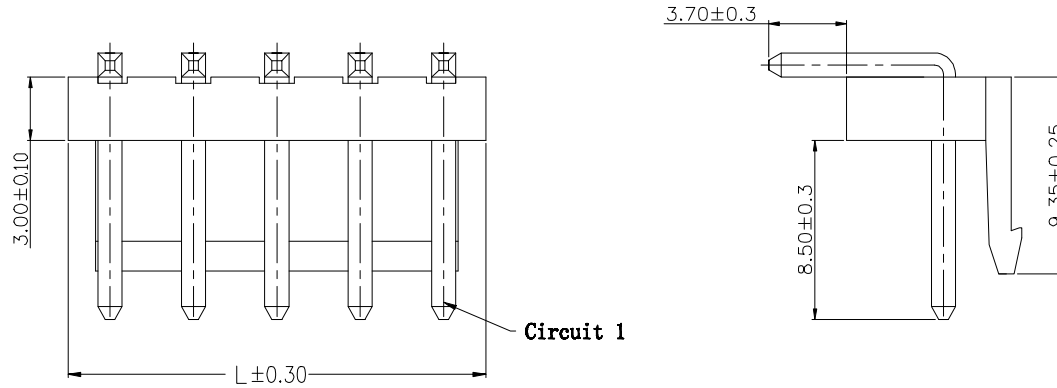


Specifications

Current Rating:7.0A AC DC
Voltage Rating: 250V AC DC
Insulation Resistance:1000MΩ Min.
Dielectric Withstanding Voltage:1500V AC/minute
Contact Resistance:10mΩ Max.
Operating Temperature:-25°C to +85°C
Materials
Contact Material: Brass
Insulator Material:Nylon-66,UL 94V-0
All materials must meet Greenconn hazardous substances control standards.

Pins	Dimensions (mm)		
	M	L1	L
02	3.96	5.00	7.94
03	7.92	8.96	11.90
04	11.88	12.92	15.82
05	15.84	16.88	19.82
06	19.80	20.84	23.78
07	23.76	24.80	27.74
08	27.72	28.76	31.70
09	31.68	32.76	35.66
10	35.64	36.68	39.62
11	39.60	40.64	43.58
12	43.56	44.60	47.54
13	47.52	48.56	51.80
14	51.48	52.52	55.46

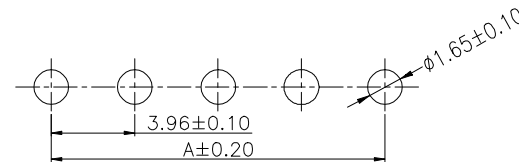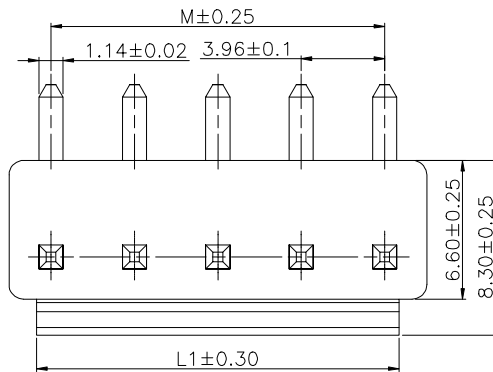

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

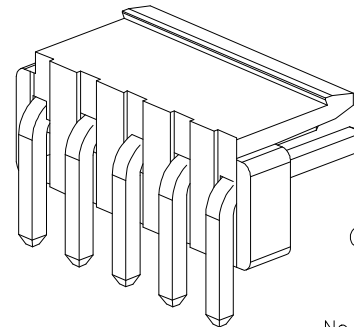

Ordering Information

GWJB110 - XX XX A 002 E X B X
No. Of Pins Per Row 02~14 Standard Plating 01= Tin Color 2=White Standard Packing N=PE Bag



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1
3RD.ANG PROJ. PAGE. 1/1

GENERAL TOLERANCE

X.±5°	X.±0.50
.X'±2°	.X±0.30
.XX'±1°	.XX±0.20
.XXX'±/°	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWJB110-CA002EB


PART NO.

GWJB110-XXXXA002EXBX

TITLE.

3.96mm PITCH WAFER
90° DIP TYPE

AQ 1 2 3 4 5 6 7 8 9

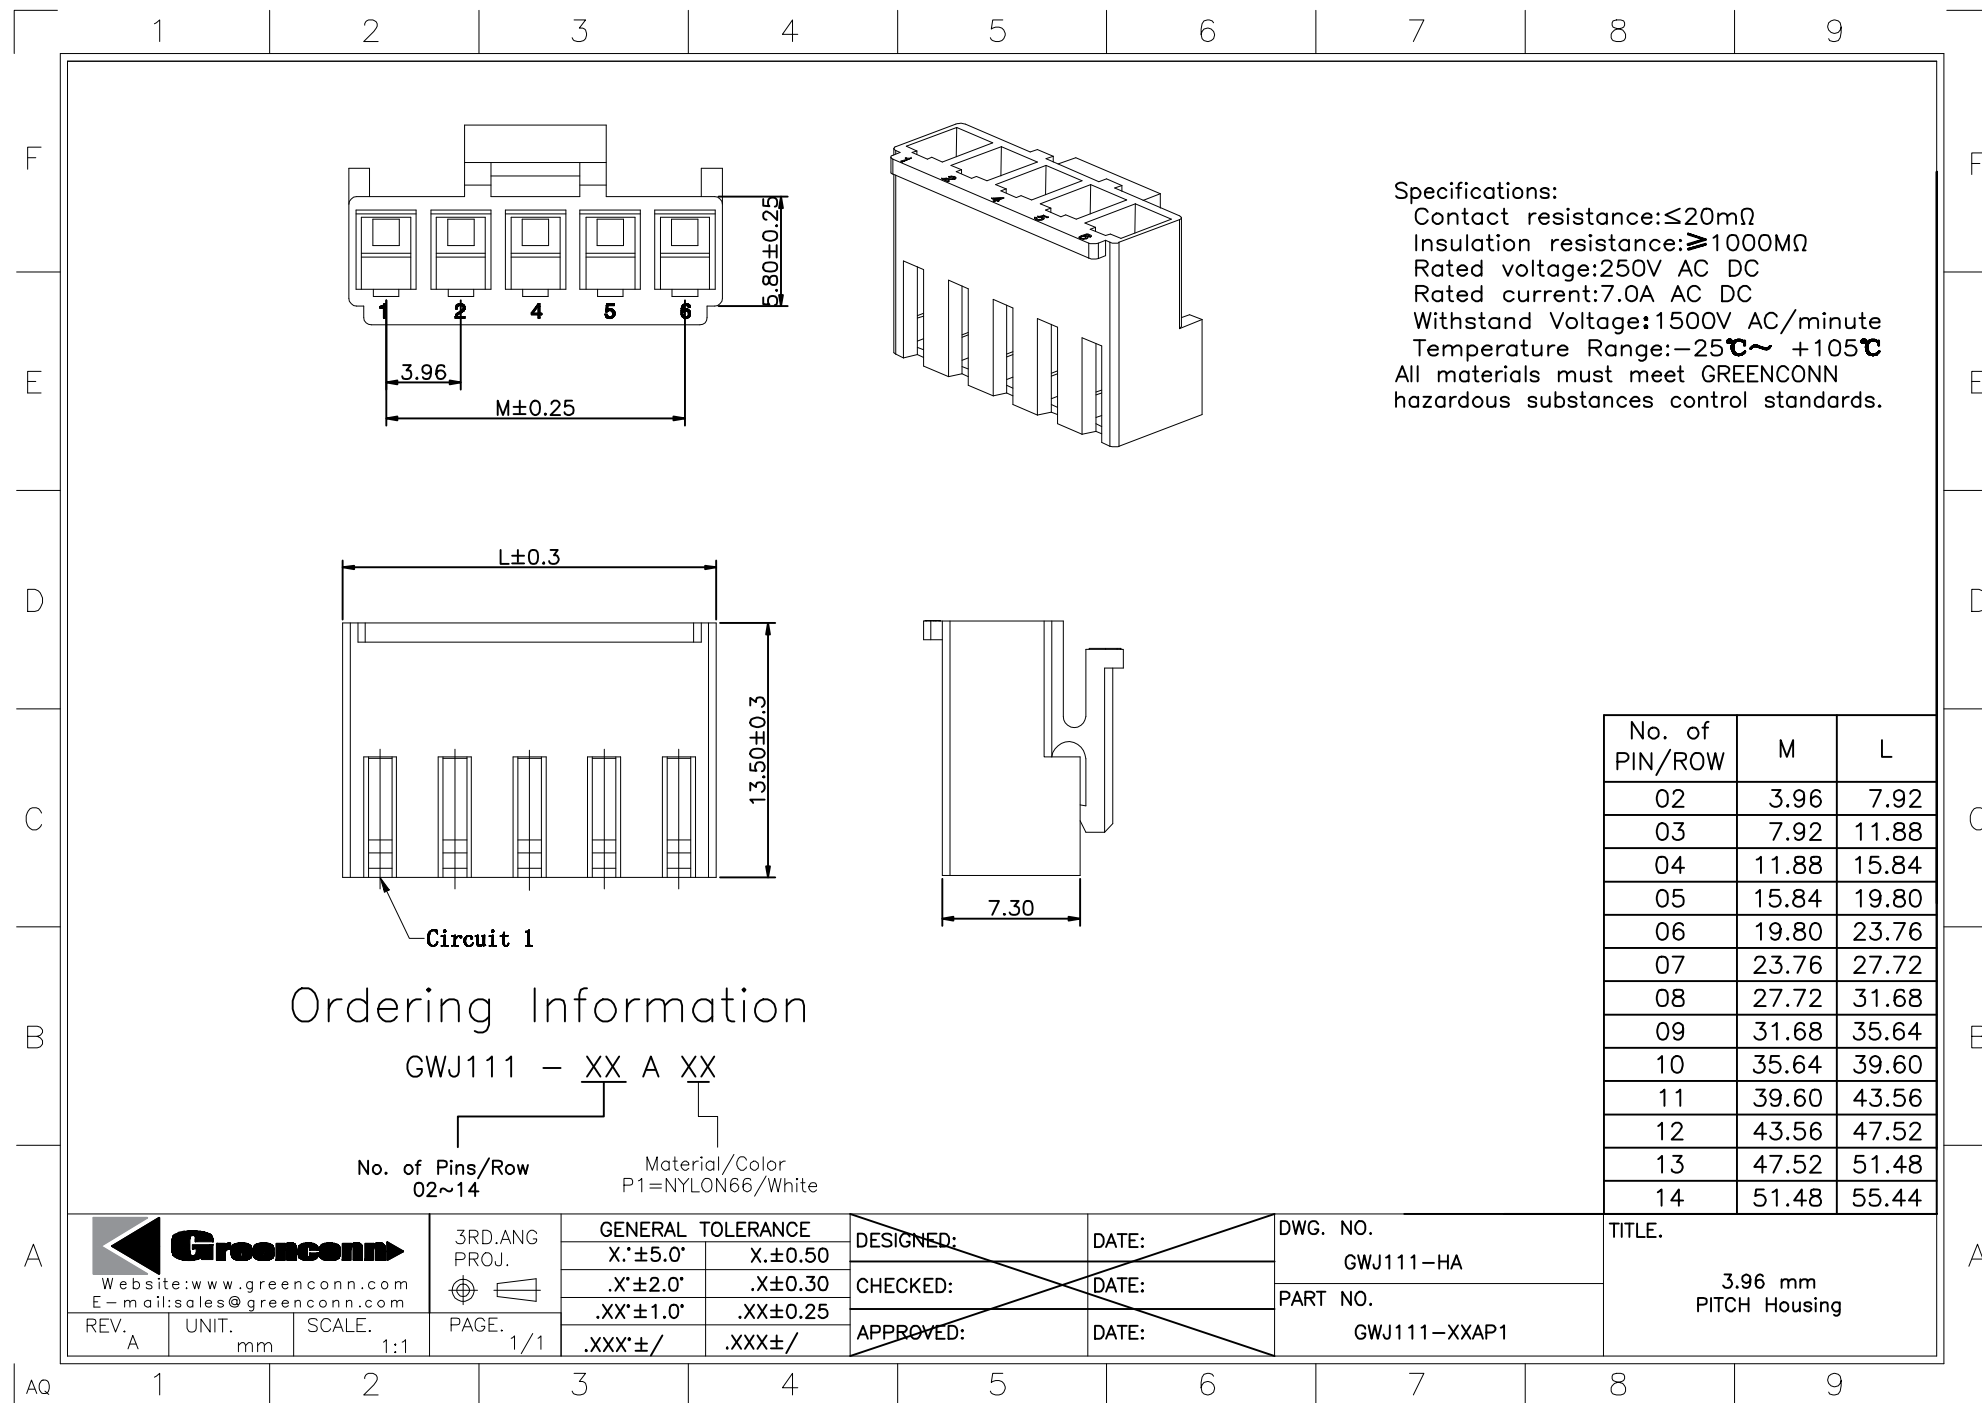

1 2 3 4 5 6 7 8 9

F






E

D

C

B

A

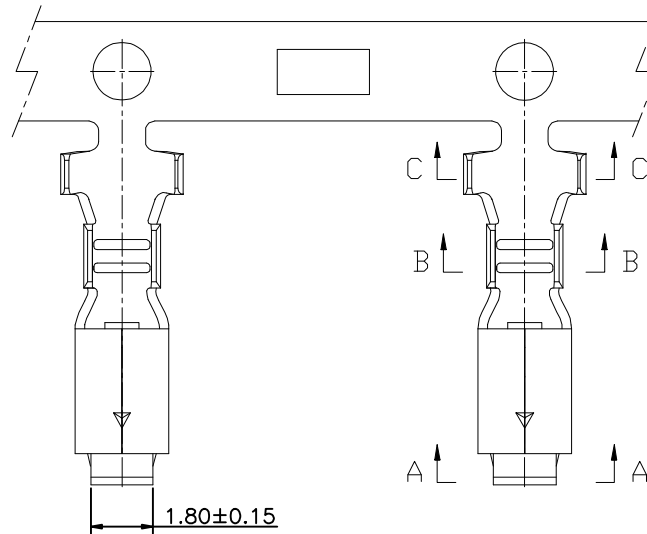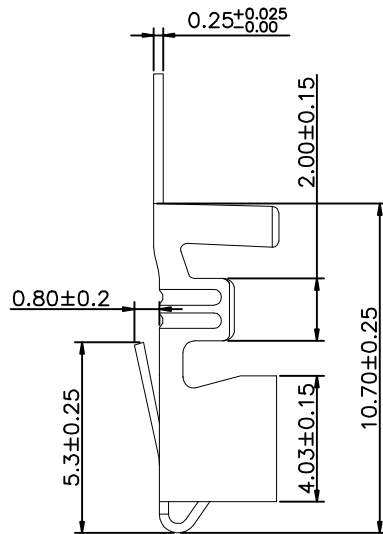

Ordering Information

GRJ108 - 01 XX XX


Standard Plating
01=Tin

Material
AB=Phosphor bronze

Wire Range	Insulation O.D.	Material	Finish
AWG #22~#18	3.00mm(MAX)	Phosphor bronze	Sn-plated



3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.'±5.0'	X.±0.50
.X'±2.0'	.X±0.30
.XX'±1.0'	.XX±0.25
.XXX'±/	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GRJ108-T1

PART NO.

GRJ108-0101AB

TITLE.

3.96 mm PITCH

AQ

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A