

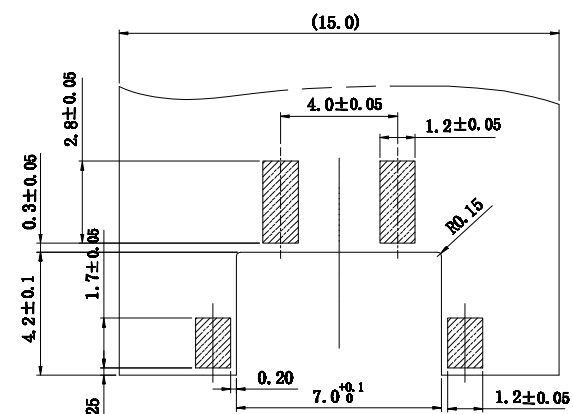
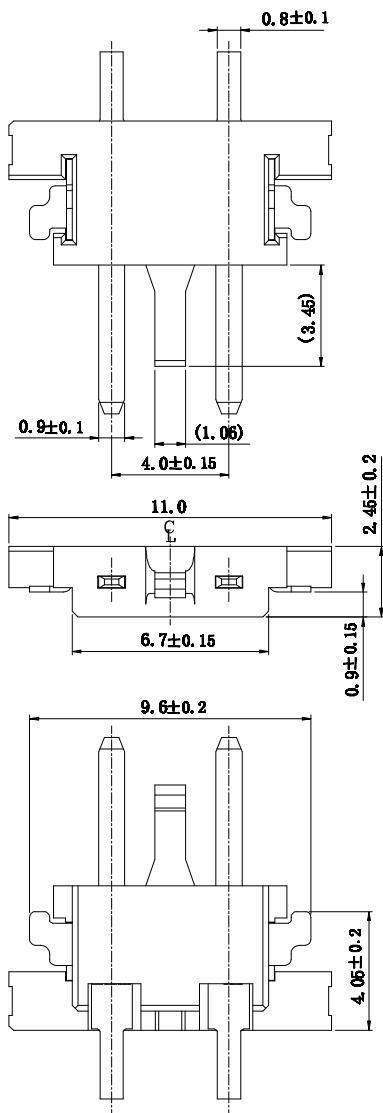


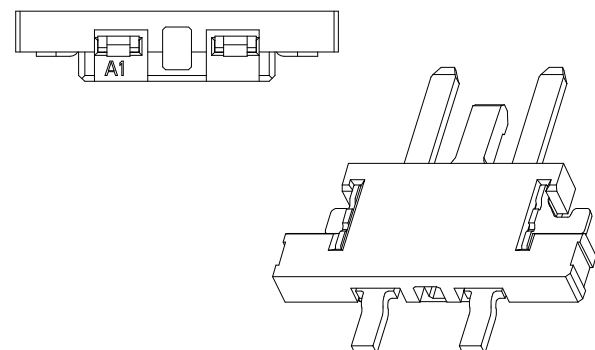

PCB寸法 (T=1.0mm)
PCB Layout (T=1.0mm)

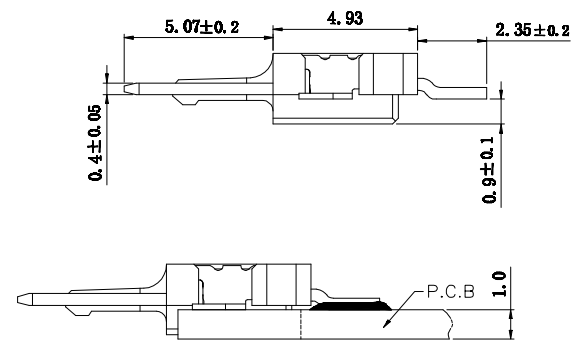

- NOTES:
- MATERIAL
1-1. HOUSING: LCP (UL94V-0)
1-2. CONTACT: BRASS
1-3. FITTING NAIL: PHOSPHOR BRONZE
 - PLATING: SEE PART NUMBER
 - RATING
3-1. OPERATING TEMPERATURE: $-40 \sim 125^{\circ}\text{C}$
3-2. OPERATING VOLTAGE: 400V AC/DC
3-3. CURRENT RATING: 1.0 AMPS
3-4. DIELECTRIC WITHSTANDING VOLTAGE: 1800V AC/Minute;
3-5. INSULATION RESISTANCE: 1000M Ω Min;
3-6. CONTACT RESISTANCE: 0.03 Ω Max;

Ordering Information

G WKD102-02 XX A 001 C X B X

Standard Plating
22=Matte Tin
Selective Plating
01=Tin
02=Gold Flash

Color
1=Black
2=White

Standard Packing
D=Tape&Reel



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X' ± 3.0	X $\pm$ /
.X' ± 2.0	.X ± 0.30
.XX' ± 1.5	.XX ± 0.20
.XXX' ± 1.0	.XXX ± 0.15

DESIGNED: _____
CHECKED: _____
APPROVED: _____

DATE: _____
DATE: _____
DATE: _____

DWG. NO. GWKD102-CA001
PART NO. GWKD102-02XXA001CXB

TITLE. 4.0 CONN. SMT SINGLE ROW RIGHT-ANGLE