

Specifications

Operating Voltage:400V AC/DC

Current Rating:0.75Amp

Insulation Resistance:1000MΩ Min.

Dielectric Withstanding Voltage:1800VAC

Contact Resistance: 30mΩ Max.

Operating Temperature: -25°C to $+85^{\circ}\text{C}$

Materials

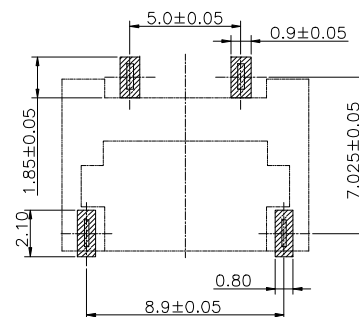




Contact Material:Phosphor Bronze

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 LCP(Nylon) or the equivalent material

All materials must meet GREENCONN

hazardous substances control standards.

PCB LAYOUT(± 0.05)

Ordering Information

G WLD101 - 02 XX A 001 C X A X

Standard Plating

$$01 = T_{in}$$

22=Matte Tin

Color

5=Beige

Standard Packing

A=box

B=Tray
D=Tape&Reel

格稜股份有限公司
Greenconn Corporation

格菱股份有限公司 Greenconn Corporation					GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GWLD101-CA1CS	TITLE. 5.0 WTB CONN,SMT SINGLE ROW VERTICAL
					X.±5.0'	X.±0.30				
					.X'±3.0'	.X±0.25				
					.XX'±2.0'	.XX±0.15			CHECKED:	
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1		.XXX'±1.0'	.XXX±0.10	APPROVED:	DATE:		