

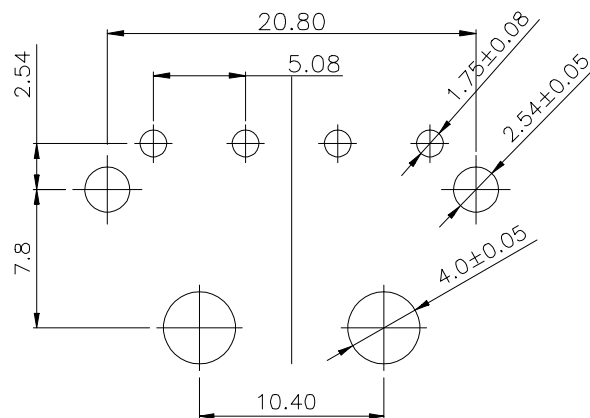
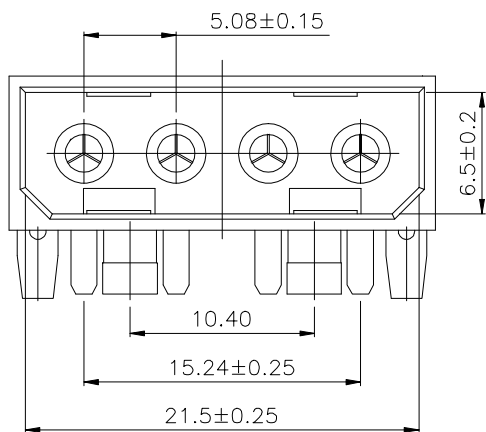


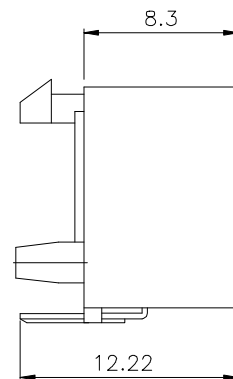

PCB Layout

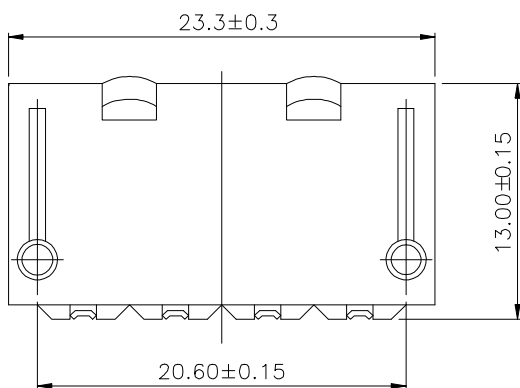

Specifications:
 Current rating: 7A AC/DC.
 Voltage rating: 250V AC/DC
 Temperature range: -25°C ~ +85°C.
 Contact resistance: 20mΩ Max.
 Insulation resistance: 1000MΩ Min.
 Withstanding voltage: 1500V
 AC/minute.
 Material: PA66.UL94V-2.

Ordering Information

G WMB111-04 XX B 001 E X B X

Standard Plating
 01=Tin
 Selective Plating
 02=Gold Flash
 22=Matte Tin
 ...

Color
 1=Black
 2=White
 F=Transparent
 ...

Standard Packing
 N=PE Bag
 Selective Packing
 B=Tray



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG
 PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X: ±3.0"	X: ±/
.X: ±2.0"	.X: ±0.30
.XX: ±1.5"	.XX: ±0.25
.XXX: ±1.0"	.XXX: ±0.15

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

GWMB111-CB001

PART NO.

GWMB111-XXXXB001EXBX

TITLE.

5.08mm Pitch Wafer
 带柱