

1 2 3 4 5 6 7 8 9

F







E

D

C

B

A

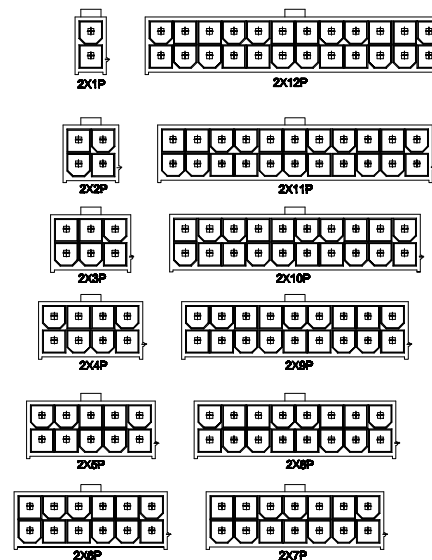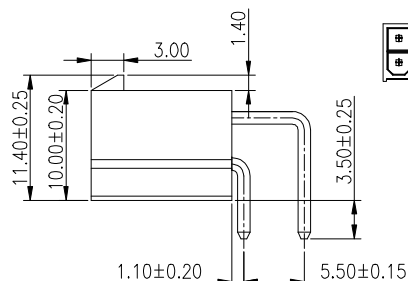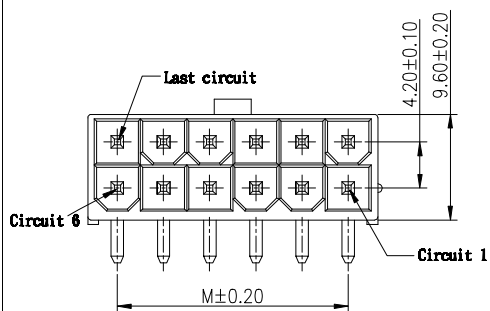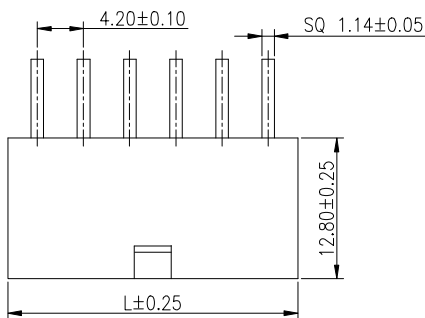

防呆排列图

Specifications

Voltage rating: 600V AC / DC
Current rating: 9A AC / DC
Withstanding voltage: 1500V AC/minute
Temperature range: -40°C to +105°C
Insulation resistance: $\geq 1000M\Omega$
Contact resistance: $\leq 10m\Omega$

Materials

Contact Material: Brass
Insulator Material: Nylon-66, UL 94V-2
All materials must meet Greenconn hazardous substances control standards.

No. of pin/Row	Dimensions	
	M	L
01	—	5.40
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40
07	25.20	30.60
08	29.40	34.80
09	33.60	39.00
10	37.80	43.20
11	42.00	47.40
12	46.20	51.60

Ordering Information

G WRB201-XX XX A 008 E X B X

No. of Pins per Row 01~12 Standard Plating 01=Tin Color 1=Black Standard Packing N=PE Bag
Selective Plating 02=Gold Flash 2=White Selective Packing B=Tray
22=Matte Tin:80~160u"/Ni:30~50u"



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. 02 UNIT. mm SCALE. 1:1

3RD. ANG PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X'±3.0'	X.±/
.X'±2.0'	.X±0.25
.XX'±1.5'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWRB201-CA008EB


PART NO.

GWRB201-XXXXA008EXBX

TITLE.



4.2mm pitch 90° wafer

9B 1 2 3 4 5 6 7 8 9

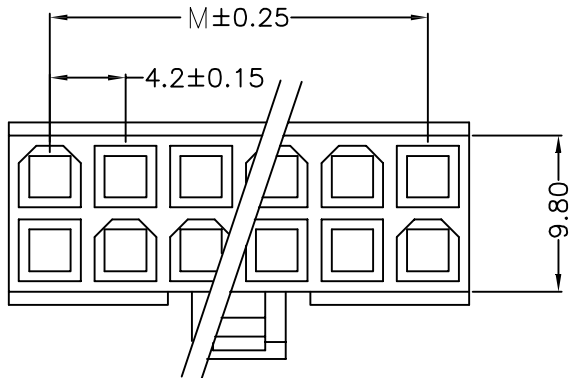

NOTES:

CURRENT RATING:9A AC/DC.
 VOLTAGE RATING:600V AC/DC
 TEMPERATURE RANGE:−40°C~+105°C.
 CONTACT RESISTANCE:10MΩ Max.
 INSULATION RESISTANCE:1000MΩ Min.
 WITHSTANDING VOLTAGE: 1500V AC/MINUTE.
 MATERIAL: Nylon66 UL94V-2.

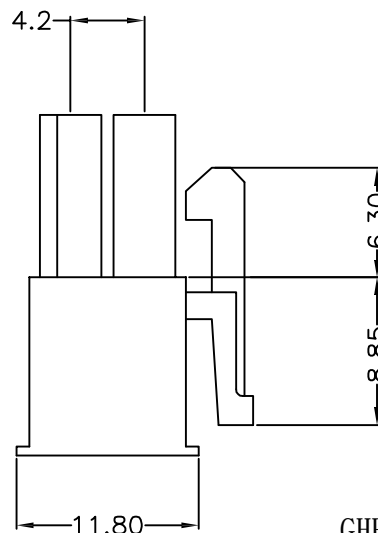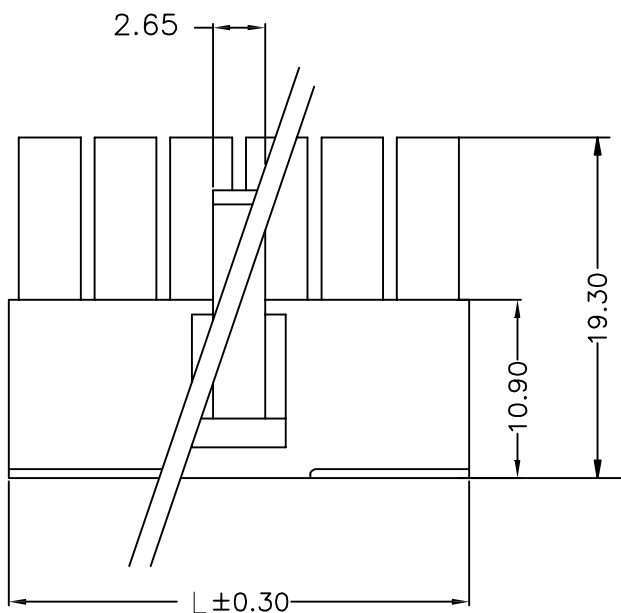

No of Pin/Row	Dimensions	
	M	L
01		5.50
02	4.20	9.70
03	8.40	13.90
04	12.60	18.10
05	16.80	22.30
06	21.00	26.50
07	25.20	30.70
08	29.40	34.90
09	33.60	39.10
10	37.80	43.30
11	42.00	47.50
12	46.20	51.70

GHR232 - XX

A


XX

No. of Pin/Row
01 ~ 12

Material/Color
NF=Nylon66/Transparent



3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X停 /	.X?.30
.XX停 /	.XX?.25
.XXX停 /	.XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.




GHR232-HA

PART NO.


GHR232-XXAXX

TITLE.


4.2mm pitch housing

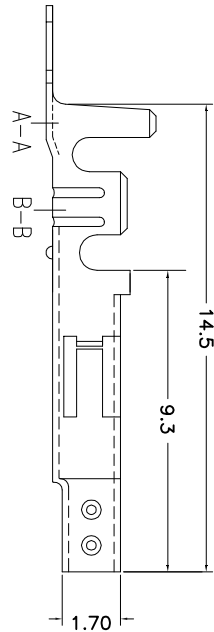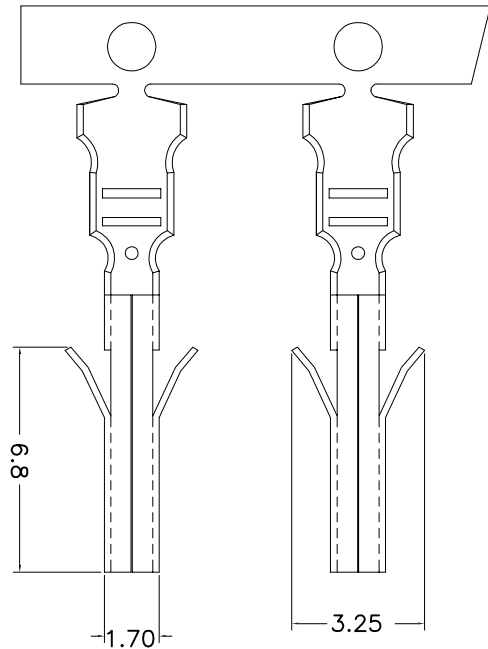

A-A



B-B



单PIN拉力0.15KG以上

Specifications:

1.Material:BRASS

2.Wire Range:AWG#18-20

3.Insulation O.D.:3.1mm(Max)

Mating With:

Housing:GHR232

Ordering Information

GRR104 - 01 XX BE


Standard Plating
01=Tin

Materials
BE=BRASS

Greenconn
Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. C UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X停 /	.X?.30
.XX停 /	.XX?.25
.XXX停 /	.XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GRR104-T1

PART NO.

GRR104-01 XX BE

TITLE.

4.2mm pitch terminal