
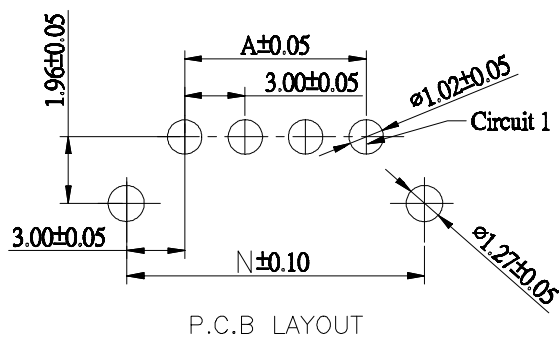
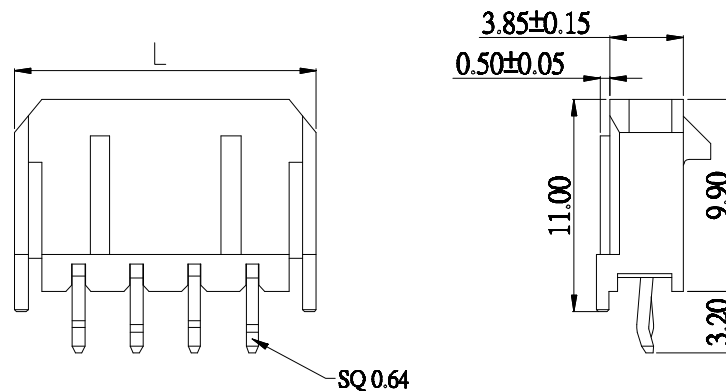


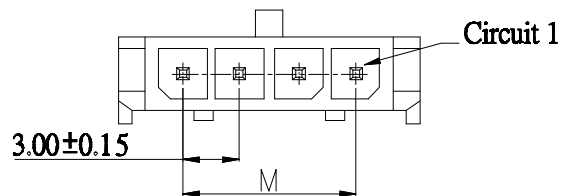

Specifications
 Current Rating:5.0Amp AC/DC
 Voltage Rating:250V AC/DC
 Insulation Resistance:1000MΩ Min.
 Dielectric Withstanding Voltage:1500V AC/Minute
 Contact Resistance:20mΩ Max.
 Operating Temperature:-25°C to +85°C
Materials
 Contact Material:Brass
 Insulator Material:UL 94V-0 LCP
 All materials must meet Greenconn hazardous substances control standards.

No. of Pins/Row	Dimensions		
	M	L	N
02	3.00	9.65	9.00
03	6.00	12.65	12.00
04	9.00	15.65	15.00
05	12.00	18.65	18.00
06	15.00	21.65	21.00
07	18.00	24.65	24.00
08	21.00	27.65	27.00
09	24.00	30.65	30.00
10	27.00	33.65	33.00
11	30.00	36.65	36.00
12	33.00	39.65	39.00

Ordering Information

GWZA108 - XX XX A 802 C X B X

No. Of Pins Per Row 02~12 Standard Plating 01=Tin Selective Plating 02=Gold Flash Color 1=Black Standard Packing N=PE Bag



REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.'±5.0'	X.±0.50
.X'±3.0'	.X±0.35
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 GWZA108-CA802CB
 PART NO.
 GWZA108-XXXXA802CXBX

TITLE.
 3.00mm pitch 180°
 DIP Wafer With "K"