

F

E

D

C

B

A

F


E

D

C

B

A

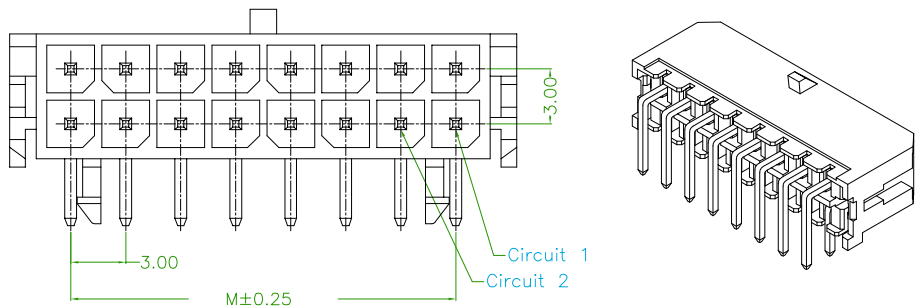

| Poles | Dimensions (mm) |       | Poles | Dimensions (mm) |       |
|-------|-----------------|-------|-------|-----------------|-------|
|       | M               | L     |       | M               | L     |
| 01    | ---             | 6.65  | 07    | 18.00           | 24.65 |
| 02    | 3.00            | 9.65  | 08    | 21.00           | 27.65 |
| 03    | 6.00            | 12.65 | 09    | 24.00           | 30.65 |
| 04    | 9.00            | 15.65 | 10    | 27.00           | 33.65 |
| 05    | 12.00           | 18.65 | 11    | 30.00           | 36.65 |
| 06    | 15.00           | 21.65 | 12    | 33.00           | 39.65 |

Specifications :

Voltage rating: 250V AC / DC

Current rating: 5A AC / DC


Withstanding voltage: 1000V AC/minute

Temperature range: -25°C~+85°C

Insulation resistance:≥1000MΩ

Contact resistance: ≤10mΩ

After environmental testing: ≤20mΩ

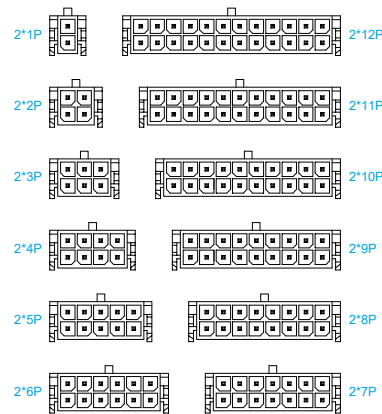

Scale 1:3

Series No.

Category:wafer


Welding Board Angle:90°

Welding Way: DIP

Material: PBT 94V-0

Material(Pin):Brass

All materials must meet Greenconn requirement for environment protection.

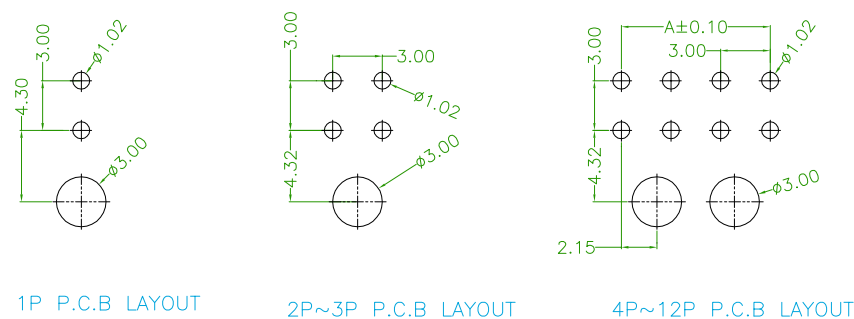

Ordering Information











格稜股份有限公司  
**Greenconn Corporation**

| GENERAL TOLERANCE |           |
|-------------------|-----------|
| X.*±/             | X.±/      |
| .X*±/             | .X±0.30   |
| .XX*±/            | .XX±0.20  |
| .XXX*±/           | .XXX±0.10 |

|          |       |
|----------|-------|
| DESIGN:  | DATE: |
| CHECKED: | DATE: |
| AUDITED: | DATE: |

|                      |               |
|----------------------|---------------|
| DWG. NO.             | GWZB206—CB1AB |
| PART NO.             |               |
| GWZB206—XXXXB001AXBX |               |

|                               |
|-------------------------------|
| TITLE.                        |
| 3.00mm Crimp Style Connectors |



2X3P-2X12P

2X2P

2X1P

Specifications:  
Current rating:5A AC/DC.  
Voltage rating:250V AC/DC  
Temperature range:-40°C~+105°C.  
Contact resistance:10mΩ Max.  
Insulation resistance:1000MΩ Min.  
Withstanding voltage: 1500V AC/minute.  
Material:PA66.UL94V-2.

| No. of PIN/Row | M     | L     |
|----------------|-------|-------|
| 01             | ----- | 3.85  |
| 02             | 3.00  | 6.85  |
| 03             | 6.00  | 9.90  |
| 04             | 9.00  | 12.90 |
| 05             | 12.00 | 15.90 |
| 06             | 15.00 | 18.90 |
| 07             | 18.00 | 21.90 |
| 08             | 21.00 | 24.90 |
| 09             | 24.00 | 28.00 |
| 10             | 27.00 | 31.00 |
| 11             | 30.00 | 34.00 |
| 12             | 33.00 | 37.00 |

GWZ352 - XX

A

X

No. of Pin/Row  
01 ~ 12


Material/Color  
M1=PA66/Black  
N=PA66/White  
NF=PA66/Transparent



Website:www.greenconn.com  
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG  
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.停 3' X.?

.X停 / .X?.25

.XX停 / .XX?.20

.XXX停 / .XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.




GWZ352-HA

PART NO.

GWZ352-XXAX

TITLE.

3.0mm pitch housing

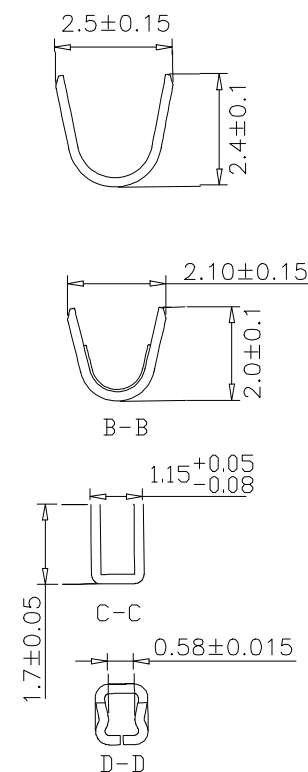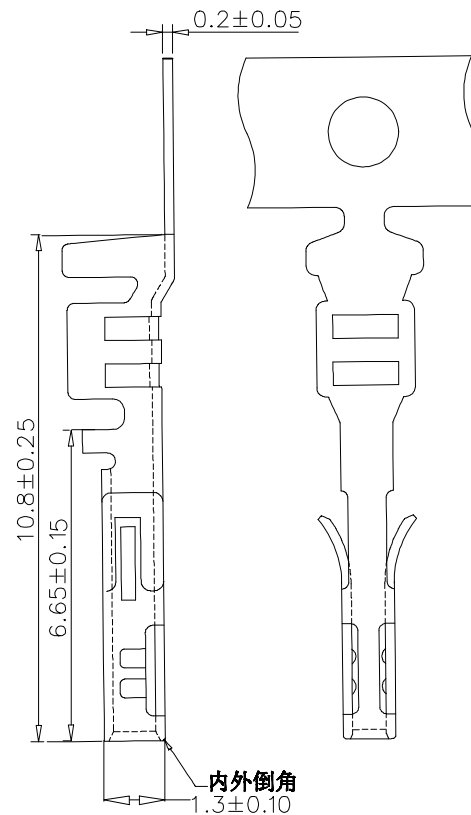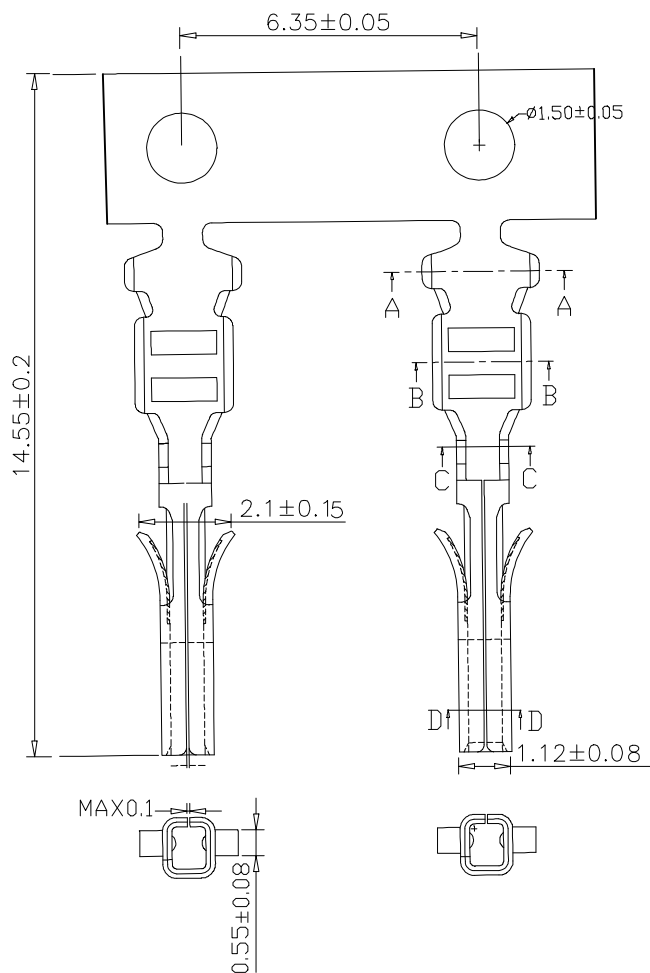

#### Specifications:

1. Material: Phosphor Bronze
2. Wire Range: AWG#20-24
3. Insulation O.D.: 1.85mm(Max)

#### Ordering Information

GRZ1B6 - 01 XX XX

Standard Plating  
01=Tin  
02=Gold flash


Materials  
AB=Phosphor Bronze



Website: [www.greenconn.com](http://www.greenconn.com)  
E-mail: [sales@greenconn.com](mailto:sales@greenconn.com)

REV. A UNIT. mm SCALE. 1:1

3RD.ANG  
PROJ.



PAGE. 1/1

#### GENERAL TOLERANCE

|         |           |
|---------|-----------|
| X.停 /   | X.?       |
| .X停 /   | .X?.25    |
| .XX停 /  | .XX?.20   |
| .XXX停 / | .XXX?. 15 |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GRZ1B6-T1

PART NO.

GRZ1B6-01 XX BE

TITLE.

3.0mm pitch terminal