


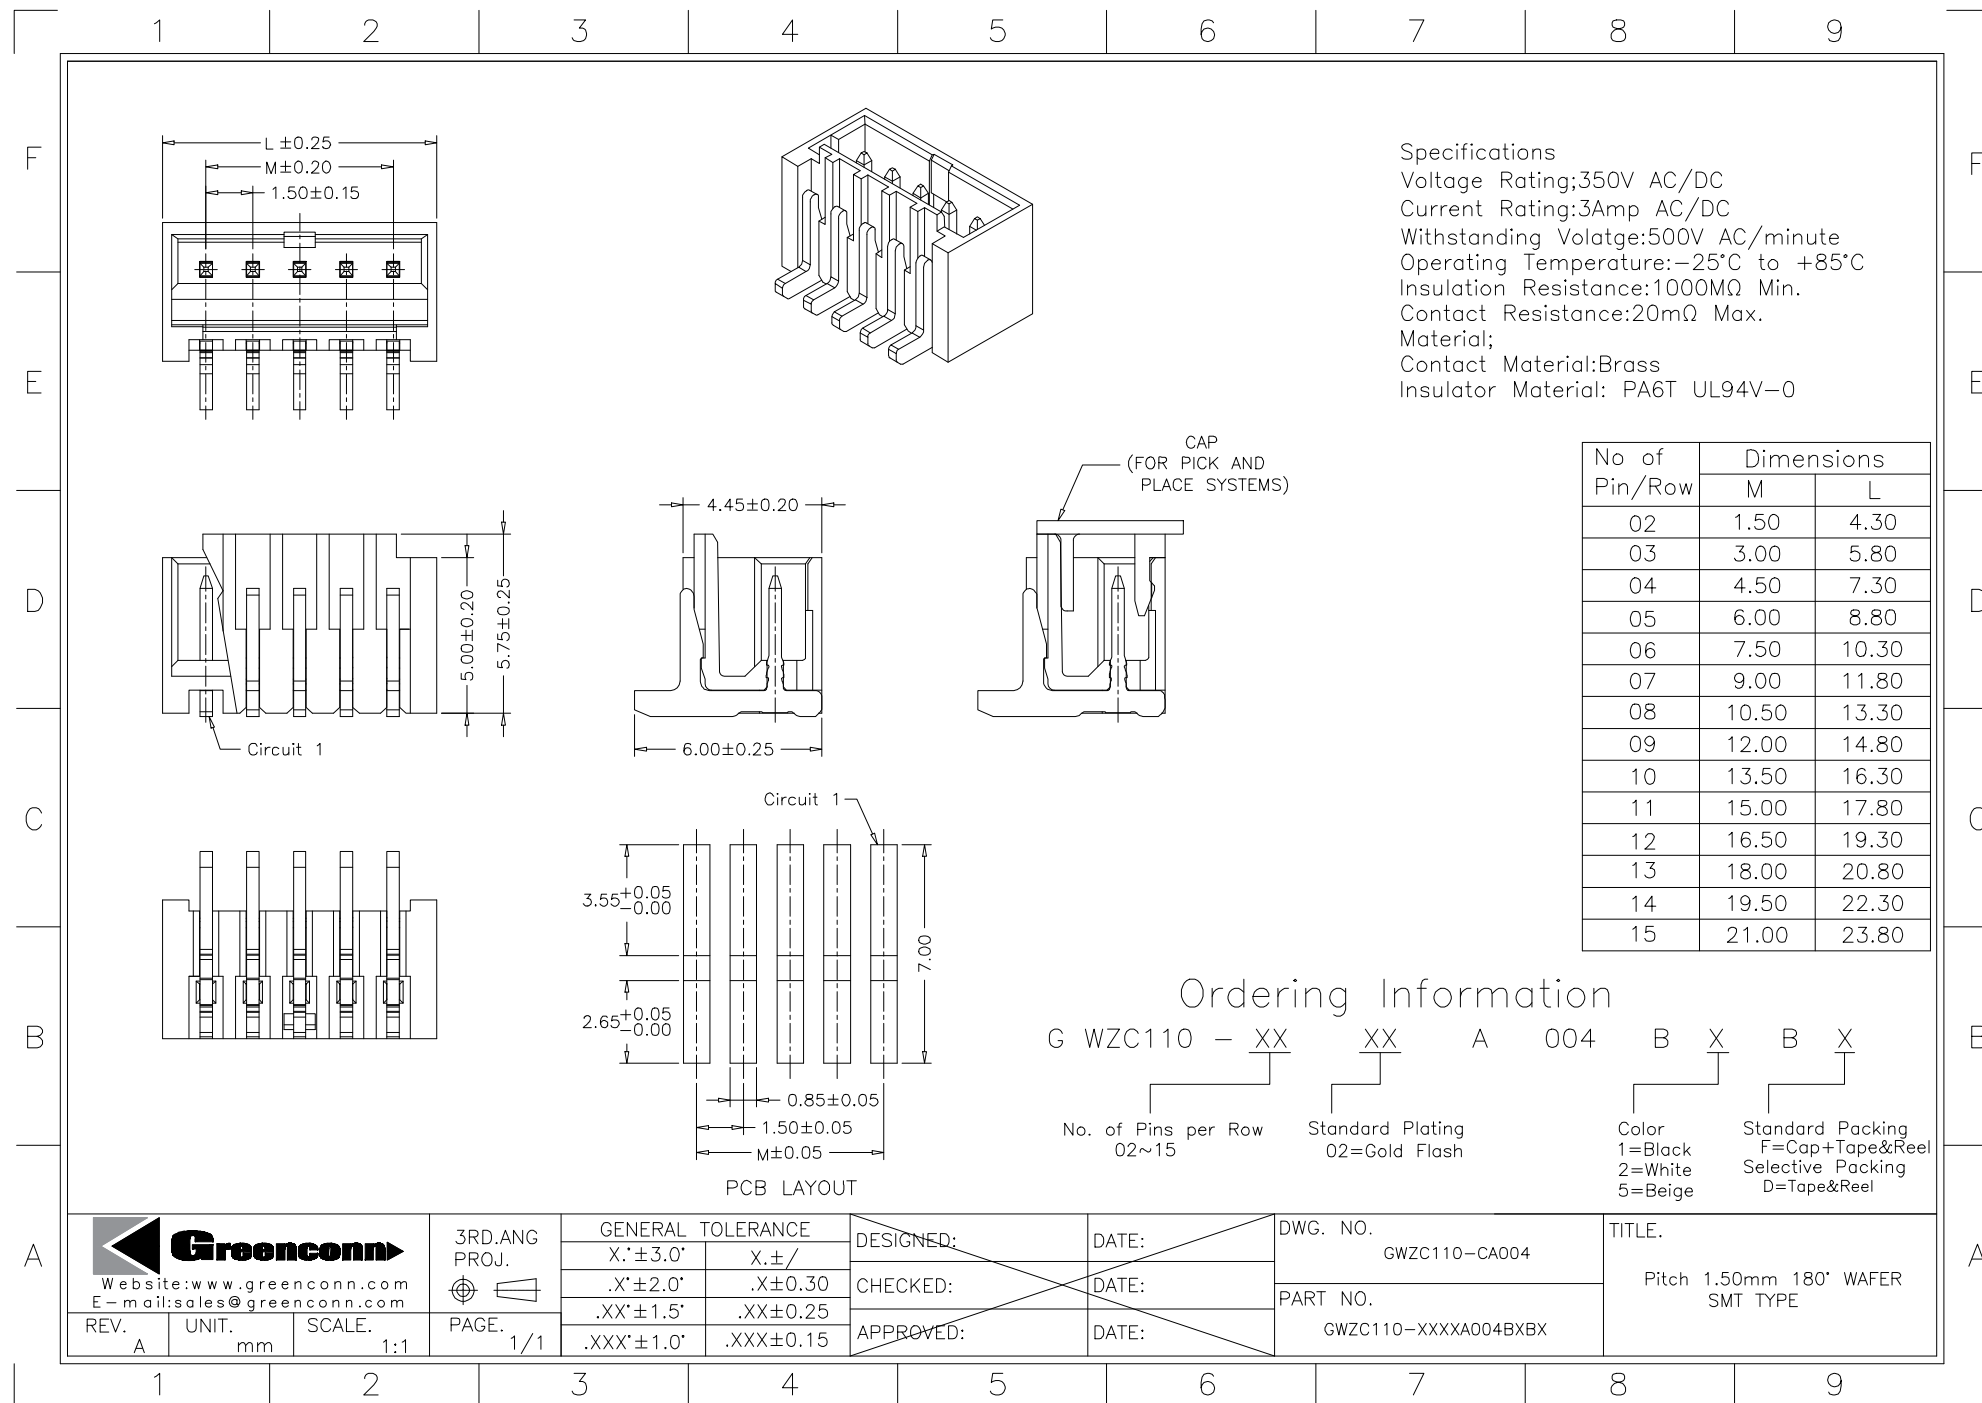
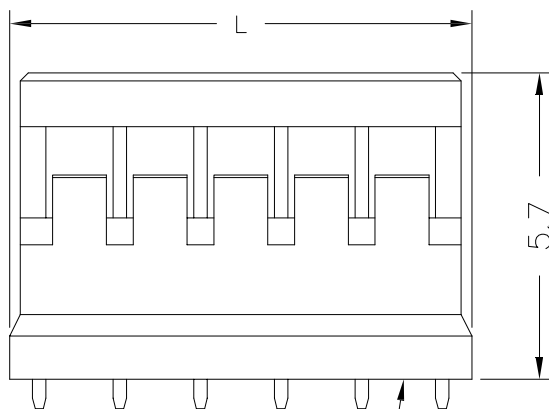




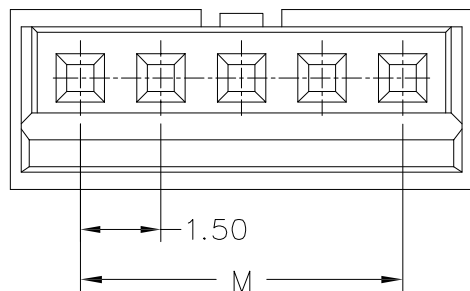

Circuit 1

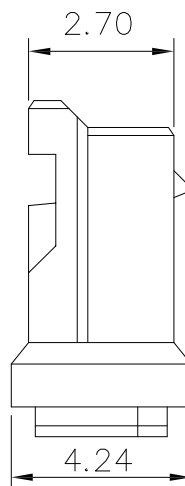

NOTES:

CURRENT RATING: 3A AC/DC.
VOLTAGE RATING: 350V AC/DC
TEMPERATURE RANGE: -25℃ ~ +85℃
CONTACT RESISTANCE: 20mΩ Max.
INSULATION RESISTANCE: 1000MΩ Min.
WITHSTANDING VOLTAGE: 500V AC/MINUTE.
MATERIAL: PA66 UL94V-0

No. of Pin/Row	Dimensions	
	M	L
02	1.50	4.10
03	3.00	5.60
04	4.50	7.10
05	6.00	8.60
06	7.50	10.10
07	9.00	11.60
08	10.50	13.10
09	12.00	14.60
10	13.50	16.10
11	15.00	17.60
12	16.50	19.10
13	18.00	20.60
14	19.50	22.10
15	21.00	23.60

GWZ121 - XX

A


X

No. of Pin/Row
02 ~ 15

Material/Color
M=Nylon66/White
M1=Nylon66/Black



3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X停 /	.X?.25
.XX停 /	.XX?.20
.XXX停 /	.XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.





GWZ121-HA

PART NO.


GWZ121-XXAX

TITLE.

1.50mm Pitch Housing

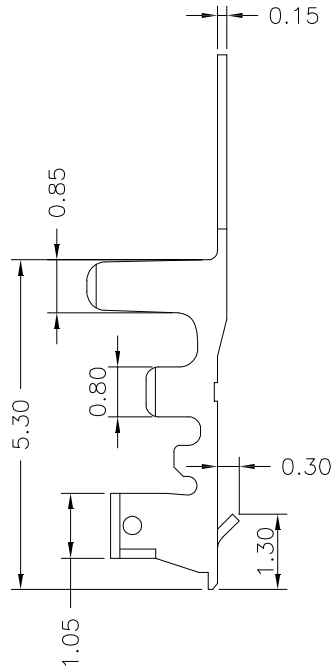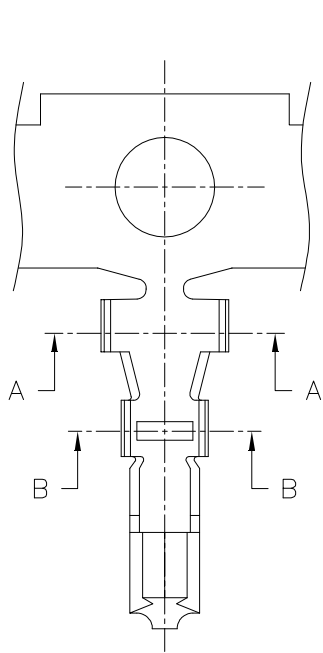

SEC:A-A



SEC:B-B

Note:

1. Material: PHOSPHOR BRONZE
2. Wire Range: AWG#24-28
3. Insulation O.D. : 1.1mm(Max)

Ordering Information

GRZ1A4 - 01 XX

AB

Standard Plating
01= Tin
02= Gold Flash


Materials
AB= Phosphor bronze



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. 停 /	X. ?
.X 停 /	.X ? .25
.XX 停 /	.XX ? .20
.XXX 停 /	.XXX ? .15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GRZ1A4-T1

PART NO.

GRZ1A4-01 XX AB

TITLE.

MX1.50mm Pitch Terminal