


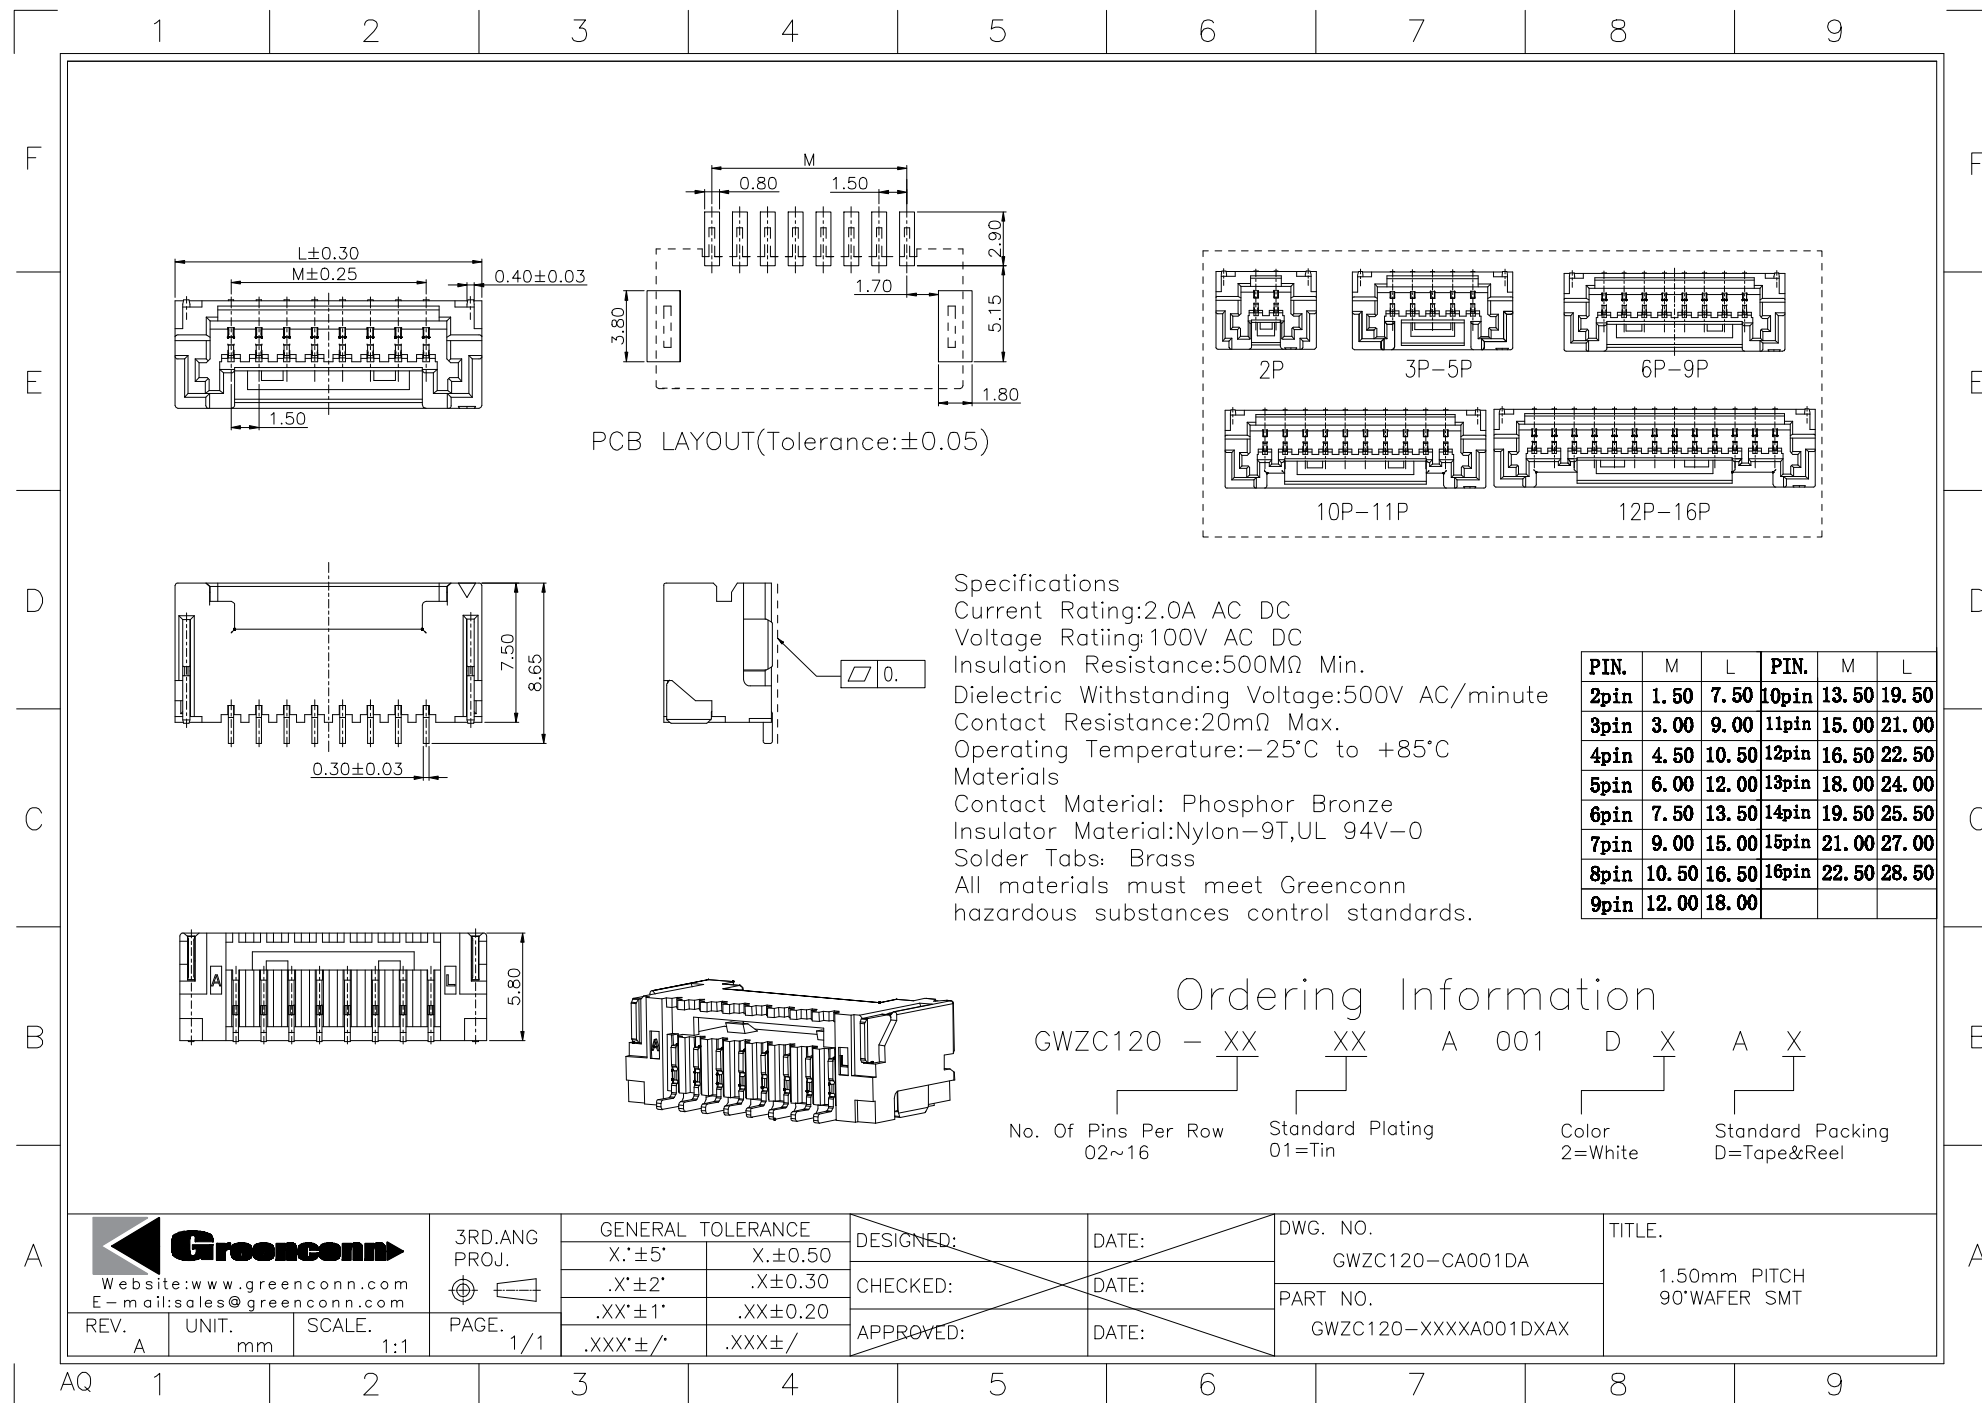

F

E

D

C

B

A

F

E

D

C

B

A







Specifications
Current Rating: 2.0A AC
Current Voltage: 100V AC
Dielectric Withstanding Voltage: 500VAC
Insulation Resistance: $\geq 500M\Omega$
Contact Resistance: $\leq 20m\Omega$
Operating Temperature: $-25^{\circ}C$ to $+85^{\circ}C$
Materials
Insulation Material: Nylon-66, UL94V-0
Mating Housing: GRZ1C7-T1
All materials must meet Greenconn hazardous substances control standards.

No. of Pins/Row	Dimension Information			
	M	L	L1	L2
02	1.50	5.00	3.60	2.70
03	3.00	6.30	5.10	3.45
04	4.50	7.80	6.60	4.45
05	6.00	9.30	8.10	4.45
06	7.50	10.80	9.60	7.45
07	9.00	12.30	11.10	7.45
08	10.50	13.80	12.60	9.80
09	12.00	15.30	14.10	9.80
10	13.50	16.80	15.60	9.80
11	15.00	18.30	17.10	9.80
12	16.50	19.80	18.60	9.80
13	18.00	21.30	20.10	11.30
14	19.50	22.80	21.60	11.30
15	21.00	24.30	23.10	11.30
16	21.00	25.80	24.60	11.30

Ordering Information

GHZ181 - XX A XX

No. of Pins Per Row 02-16
Materials /Color M=Nylon-66/White

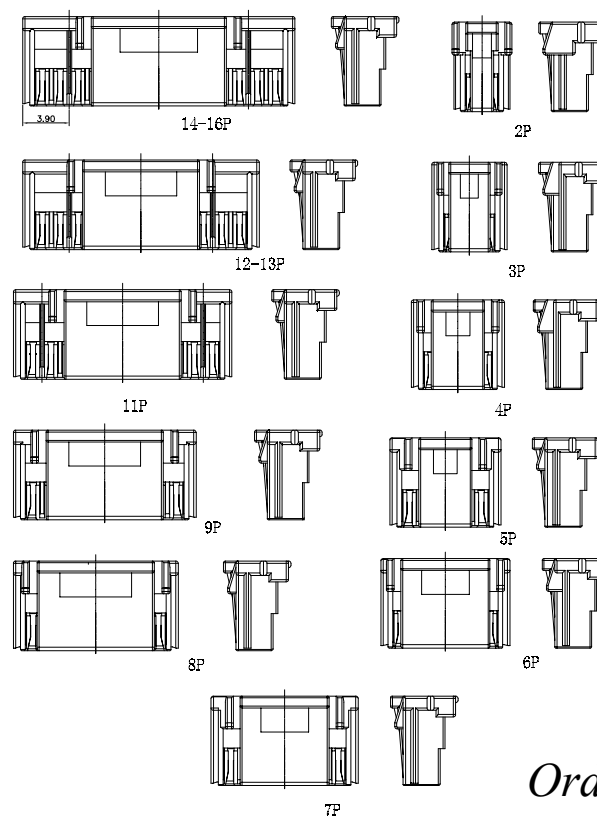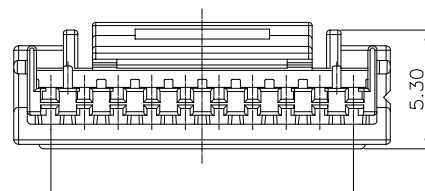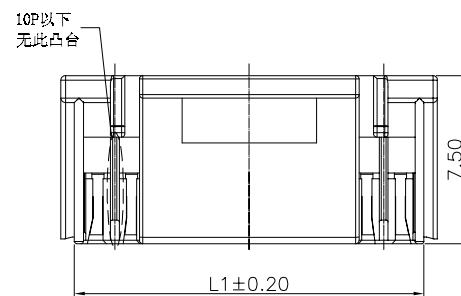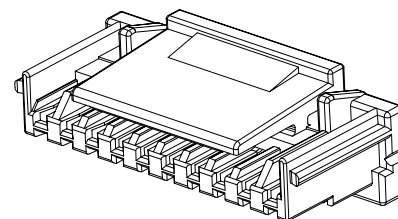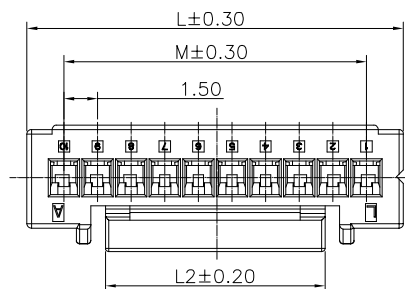

REV. A UNIT. mm SCALE. 1:1

3RD.ANG PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5*	X.±0.50
.X*±2*	.X±0.30
.XX*±1*	.XX±0.20
.XXX*±/*	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	GHZ181-HA
PART NO.	GHZ181-XXAXX

TITLE.	1.50mm PITCH Housing
--------	----------------------

AQ

1

2

3

4

5

6

7

8

9

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F






E

D

C

B

A

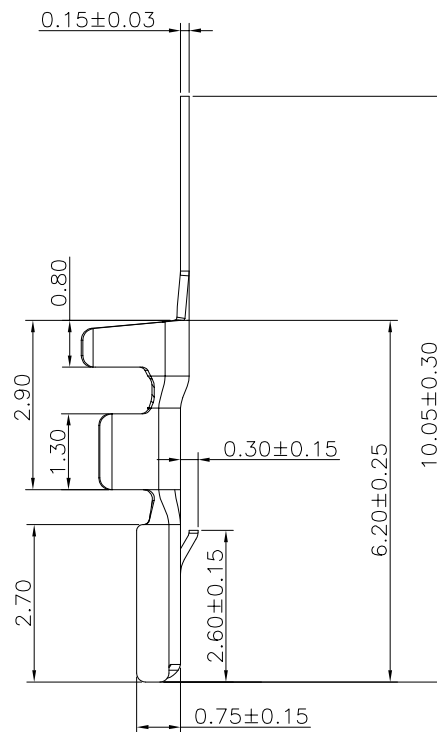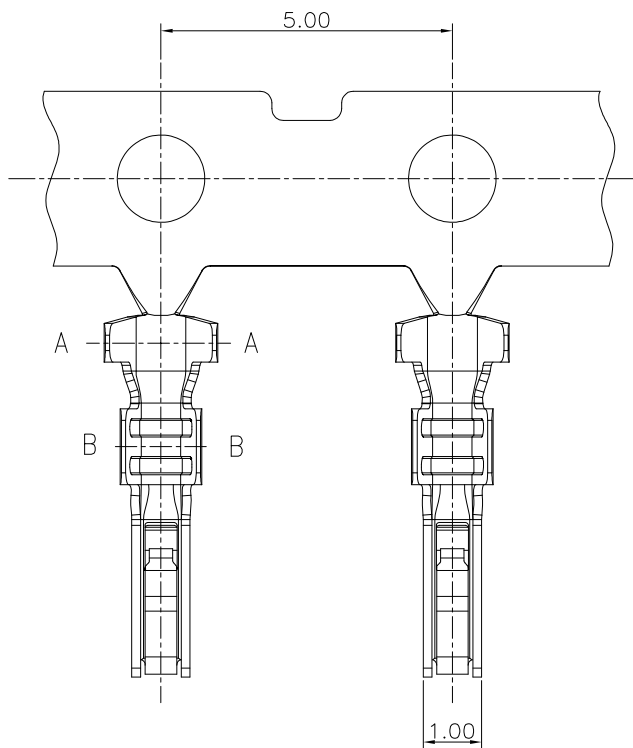

SECTION A-A

Ordering Information

GRZ1C7 - 01 XX XX

Standard Plating
01=Tin

Materials
AB=Phosphor bronze



REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5°	X.±0.50
.X*±2°	.X±0.30
.XX*±1°	.XX±0.20
.XXX*±/°	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
GRZ1C7-T1
PART NO.
GRZ1C7-01XXAB

TITLE.
1.50mm PITCH Terminal

AQ 1 2 3 4 5 6 7 8 9