

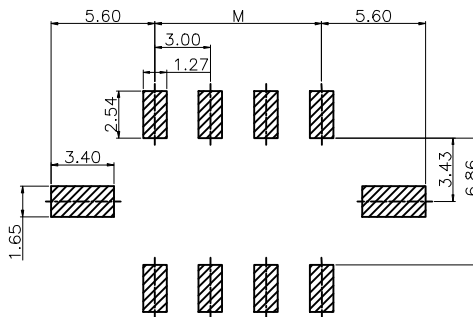
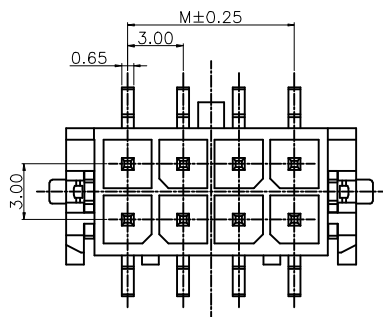
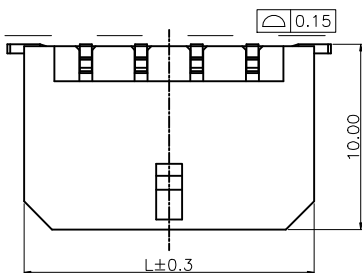


WITH COVER



PCB LAYOUT(Tolerance:±0.05)



Specifications

Current Rating:5.0A AC DC

Voltage Rating: 250V AC DC

Insulation Resistance:1000MΩ Min.

Dielectric Withstanding Voltage:1000V AC/minute

Contact Resistance:10mΩ Max.

Operating Temperature:-25°C to +85°C

Materials

Contact Material: Brass

Insulator Material:LCP,UL 94V-0

Solder Tabs: Brass

CAP:Stainless steel

All materials must meet Greenconn hazardous substances control standards.

PIN	M	L
2x1		6.65
2x2	3.00	9.65
2x3	6.00	12.65
2x4	9.00	15.65
2x5	12.00	18.65
2x6	15.00	21.65
2x7	18.00	24.65
2x8	21.00	27.65
2x9	24.00	30.65
2x10	27.00	33.65
2x11	30.00	36.65
2x12	33.00	39.65

Ordering Information

GWZC201 - XX XX A 005 C X B X


No. Of Pins Per Row 02~24 Standard Plating 22=Matte Tin Color 1=Black Standard Packing F=CAP+Tape&Reel



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X'±5'	X.±0.50
.X'±2'	.X±0.30
.XX'±1'	.XX±0.20
.XXX'±/	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWZC201-CA005CB

PART NO.

GWZC201-XXXXA005CXBX

TITLE.

2.00mm PITCH
90° SMT WAFER

