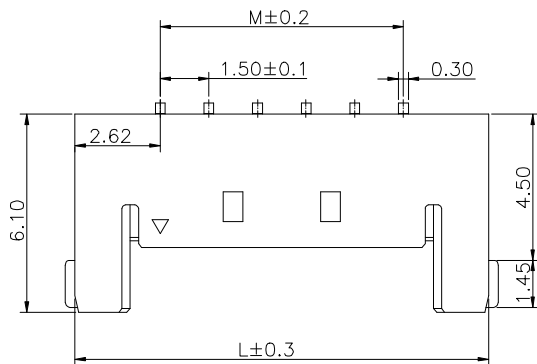


Specifications :

Voltage rating: 150V AC / DC

Current rating: 3A AC / DC

Withstanding voltage: 500V AC/minute

Temperature range: -25°C~+85°C

Insulation resistance:100MΩ(min)

Contact resistance: ≤20mΩ

After environmental testing: ≤40mΩ

Contact Material:Brass

Insulator Material:PA4T UL 94V-0

All materials must meet Greenconn

requirement for environment protection.

Pins	Dimensions(mm)	
	M	L
02	1.50	6.75
03	3.00	8.25
04	4.50	9.75
05	6.00	11.25
06	7.50	12.75
07	9.00	14.25
08	10.50	15.75
09	12.00	17.25
10	13.50	18.75
11	15.00	20.25
12	16.50	21.75

Ordering Information

G WZD117 - XX

XX

A

001

Z

X

Z

X

No. of Pins per Row
02~12

Standard Plating
02=Gold Flash

Color
1=Black

Standard Packing
D=Tape&Reel

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X:±/	X.±/
.X'±/	.X±0.30
.XX'±/	.XX±0.20
.XXX'±/	.XXX±0.10

DESIGN:

DATE:

CHECKED:

DATE:

AUDITED:

DATE:

DWG. NO.

GWZD117-CA1ZZ

PART NO.

GWZD117-XXXXA001ZXZX

TITLE.

1.50 mm Crimp Style
Connectors

REV.	UNIT.	SCALE.	PAGE.	
A	mm	1:1	1/1	