

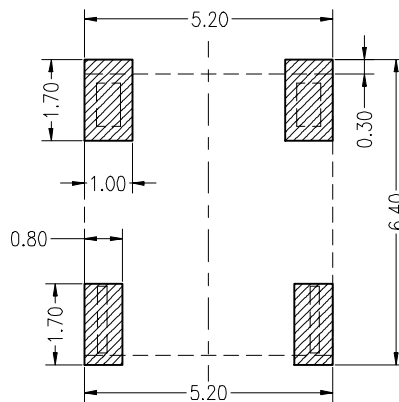
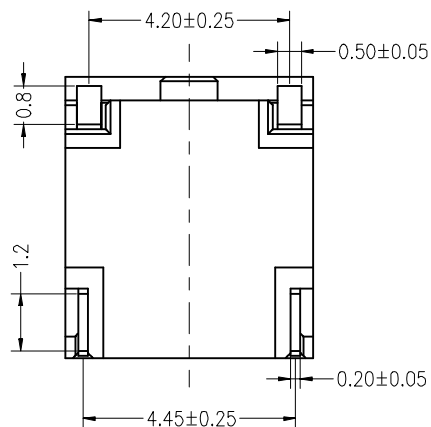





PCB LAYOUT



Specifications

Current Rating: 4.0A AC DC

Voltage Rating: 350V AC DC

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding Voltage: 1700V AC/minute

Contact Resistance: 10mΩ Max.


Operating Temperature: -25°C to +85°C

Materials

Contact Material: Phosphor Bronze

Insulator Material: PA9T, UL 94V-0

All materials must meet Greenconn hazardous substances control standards.



Ordering Information

G WZD119 - XX XX A 003 D X A X

No. of Pins per Row: 02

Standard Plating: 22=Matte Tin, Selective Plating 01=Tin, 02=Gold Flash

Color: 2=White, 3=Yellow, R=Red

Standard Packing: D=Tape & Reel



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. B UNIT. mm SCALE. 1:1

3RD. ANG PROJ.

PAGE. 1/1

GENERAL TOLERANCE

X. ± 3.0°	X. ± 0.50
.X' ± 2.0°	.X ± 0.30
.XX' ± 1.5°	.XX ± 0.20
.XXX' ± 1.0°	.XXX ± 0.15

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

GWZD119-A003DA

PART NO.

GWZD119-XXXXA003DXAX

TITLE.

1.80mm Pitch 90° SMT Wafer