
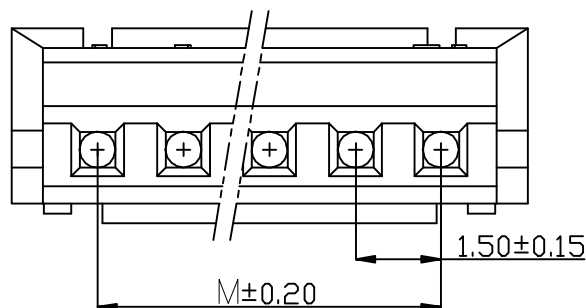
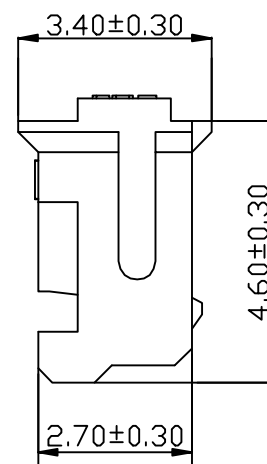


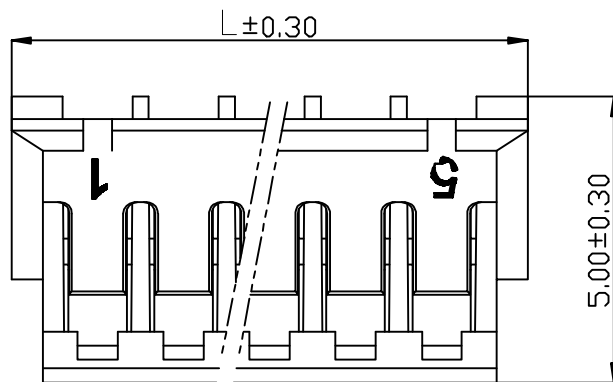

Specifications:
 Current rating:1A AC/DC.
 Voltage rating:100V AC/DC
 Temperature range:-40°C~+105°C.
 Contact resistance:20mΩ Max.
 Insulation resistance:500MΩ Min.
 Withstanding voltage: 500V AC/minute.
 Material:NYLON66.UL94V-0/2.

No of Pin/Row	Dimension	
	L	M
02	4.50	1.50
03	6.00	3.00
04	7.50	4.50
05	9.00	6.00
06	10.5	7.50
07	12.00	9.00
08	13.50	10.50
09	15.00	12.00
10	16.50	13.50
11	18.00	15.00
12	19.50	16.50
13	21.00	18.00

GHZ451 - XX

A

X

No. of Pin/Row
02 ~13

Material/Color
M=NYLON 66/White
NF=NYLON 66/Transparent



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A

UNIT. mm

SCALE. 1:1

3RD.ANG
PROJ.

PAGE. 1/1

GENERAL TOLERANCE

X. 停 / X.?

.X 停 / .X?.30

.XX 停 / .XX?.20

.XXX 停 / .XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GHZ451-HA

PART NO.

GHZ451-XXAX

TITLE.

1.5mm pitch housing

1 2 3 4 5 6 7 8 9

F


E

D


C

B

A

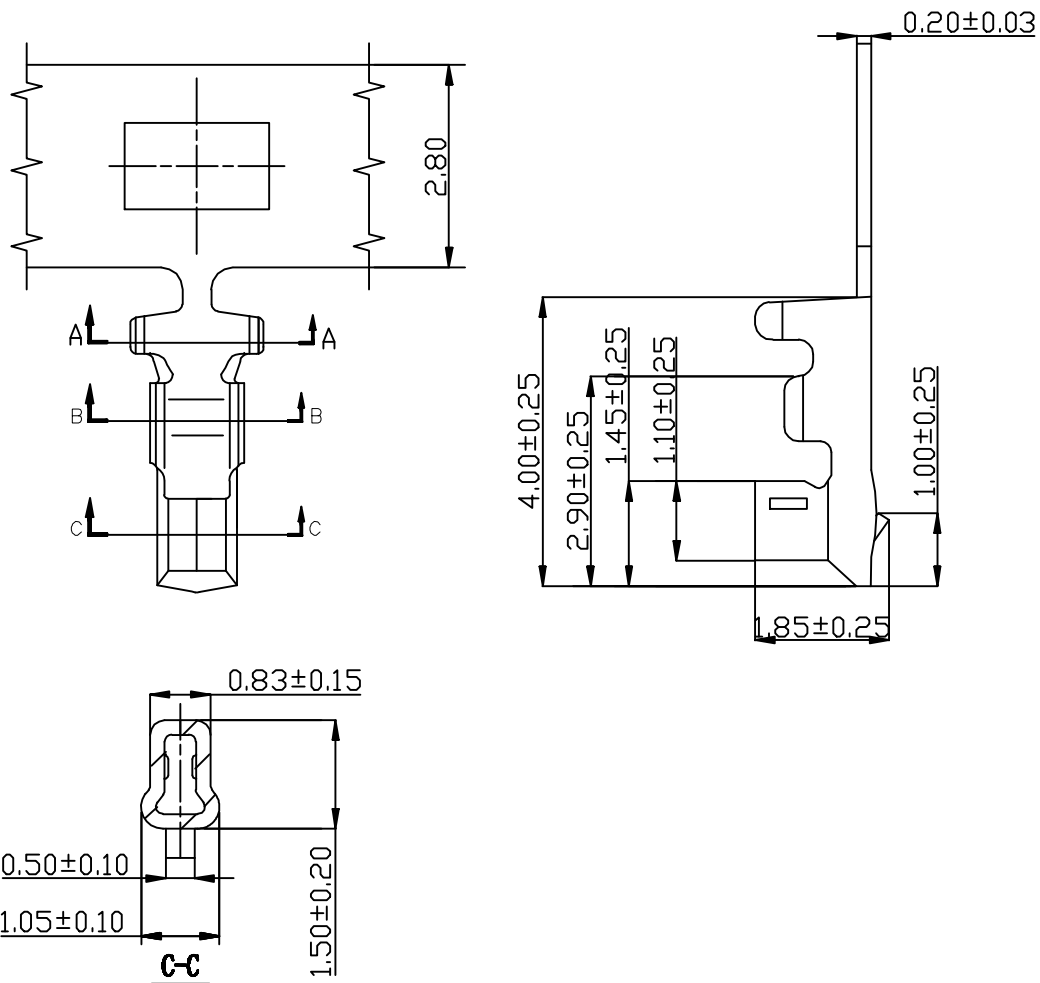

Specifications:
Material: Phosphor Bronze
Wire range: AWG#26-32
Insulation O.D: 1.10mm
Qty/reel: 10000

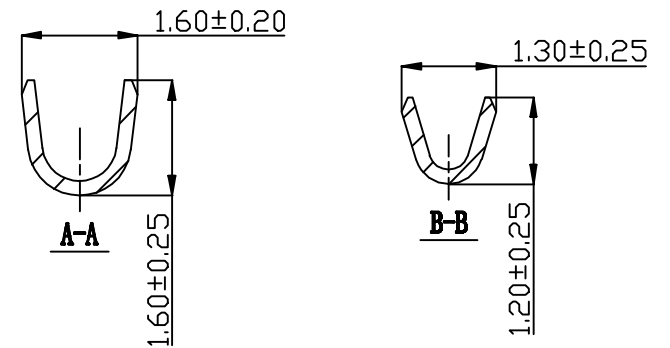

Ordering Information

GRF148 - 01 XX XX

Standard Plating
 01=Tin
 02=Gold flash

Materials
 AB=Phosphor Bronze



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
 PROJ.
 3RD.ANG
 PROJ.

PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X停 /	.X?.25
.XX停 /	.XX?.20
.XXX停 /	.XXX?. 15

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

GRF148-T1

PART NO.

GRF148-01 XX AB

TITLE.

2.00mm Pitch Terminal

1 2 3 4 5 6 7 8 9