
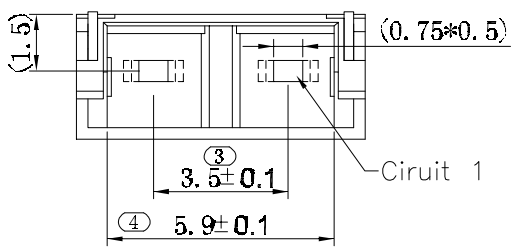
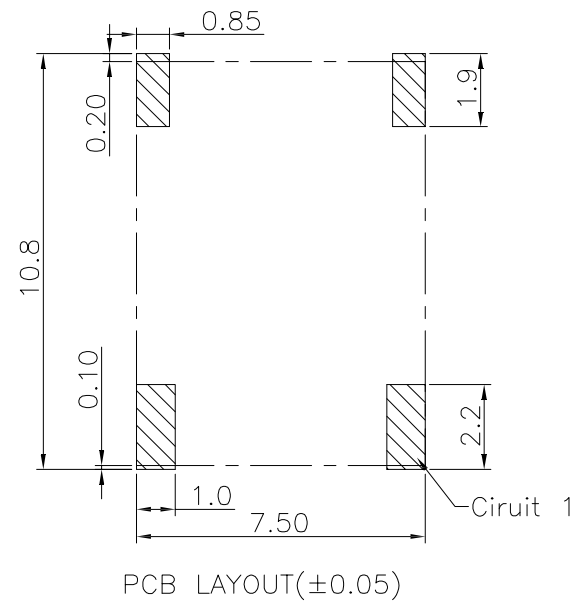
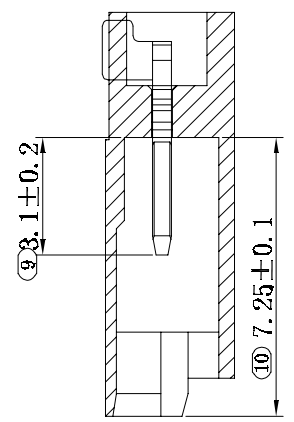
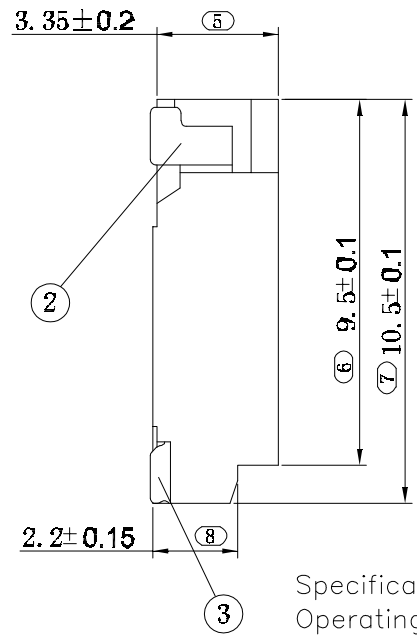


1 2 3 4 5 6 7 8 9

F
E
D
C
B
A

F
E
D
C
B
A

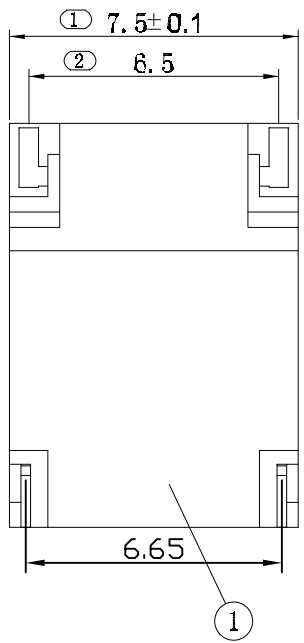

Specifications
Operating Voltage:1400AC/DC
Insulation Resistance:1000MΩ Min.
Dielectric Withstanding Voltage:3800VAC
Contact Resistance:30mΩ Max.
Operating Temperature:-25°C to +85°C
Materials
Contact Material:BRASS
Insulator Material:PA9T

Ordering Information

G WZD121 - 02 XX A 001 D 1 B X
Standard Plating 01=Tin Color 2=White Standard Packing D=Tape&Reel

A

A



3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±
.X*±3.0°	.X±0.25
.XX*±	.XX±0.15
.XXX*±	.XXX±0.10




DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. GWZD121-CA1DB
PART NO. GWZD121-02XXA001DXBX

TITLE. 3.5 WTB SMT SINGLE ROW RIGHT-ANGLE

REV. A	UNIT. mm	SCALE. 1:1
--------	----------	------------

1 2 3 4 5 6 7 8 9

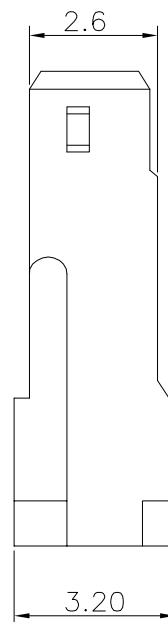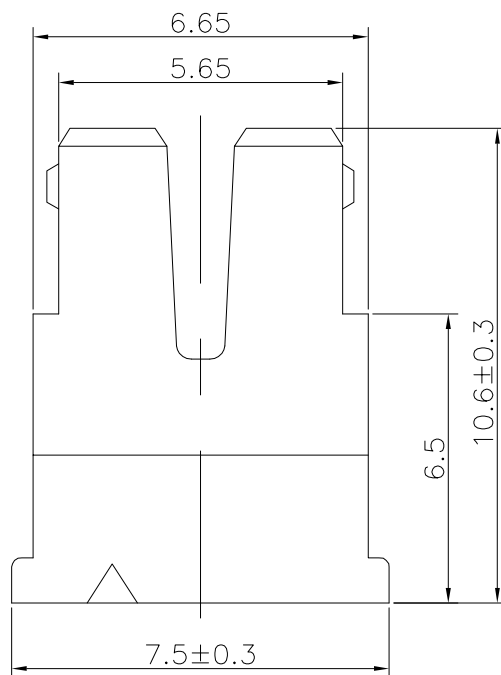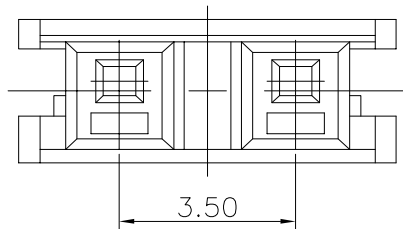

Specifications

Current Rating: 1.0A

Current Voltage: 1400V AC

Insulation Resistance: $\geq 1000M\Omega$

Dielectric Withstanding Voltage: 3800VAC

Contact Resistance: $\leq 10m\Omega$

Operating Temperature: $-25^{\circ}C$ to $+85^{\circ}C$

Applicable Wire: AWG24#~28#

Materials

Insulator Material: Nylon-66, UL 94V-0

Mating Terminal: GRZ1C9-T1

All materials must meet Greenconn hazardous substances control standards.

Ordering Information

GHZ251 - XX A XX

No. of Pins
02


Materials /Color
M=Nylon66/White



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.*±3°	X.±/
.X*±0.5°	.X±0.25
.XX*±/°	.XX±0.12
.XXX*±/°	.XXX±0.05

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.


GHZ251-HA

PART NO.

GHZ251-XXAXX

TITLE.

3.50mm Pitch HOUSING

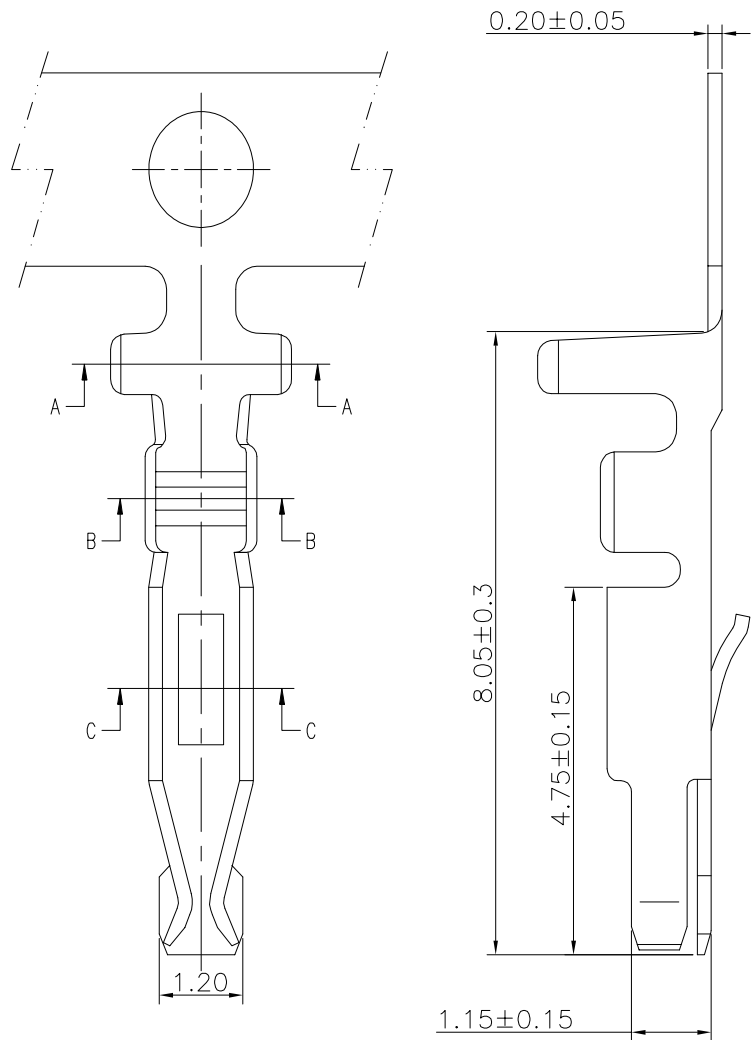


Specifications
Current Rating: 1.0A
Current Voltage: 1400V AC
Contact Resistance: ≤10mΩ
Operating Temperature: -25°C to +85°C
Applicable Wire: AWG24#~28#
Materials
Terminal Material: Phosphor Bronze
Mating Housing: GHZ251-HA
All materials must meet Greenconn hazardous substances control standards.

Ordering Information

GRZ1C9 - 01 XX XX

Standard Plating Materials
01=Tin AB=Phosphor bronze
.....

 Website: www.greenconn.com E-mail: sales@greenconn.com			3RD.ANG PROJ.  PAGE. 1/1	GENERAL TOLERANCE		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. GRZ1C9-T1	PART NO. GRZ1C9-01XXAB	TITLE. 3.50mm Pitch Terminal
REV. A	UNIT. mm	SCALE. 1:1		X.*±3*	X.±/					
				.X*±0.5*	.X±0.25					
				.XX*±/	.XX±0.12					
				.XXX*±/	.XXX±0.05					