
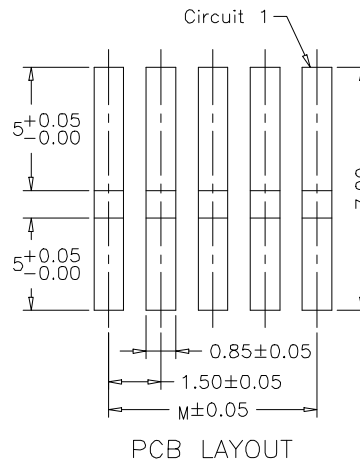
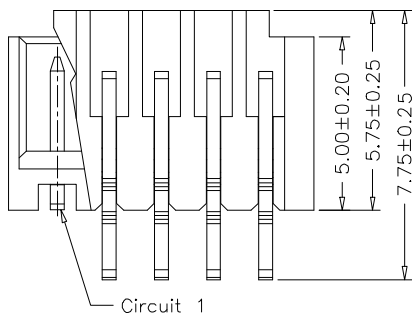



Specifications:
Current rating:3A AC/DC.
Voltage rating:350V AC/DC
Temperature range:-40°C~+105°C.
Contact resistance:20mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage: 500V AC/minute
Material:PA6T UL94V-0.

No. of Pin/Row	Dimensions	
	M	L
02	1.50	4.30
03	3.00	5.80
04	4.50	7.30
05	6.00	8.80
06	7.50	10.30
07	9.00	11.80
08	10.50	13.30
09	12.00	14.80
10	13.50	16.30
11	15.00	17.80
12	16.50	19.30
13	18.00	20.80
14	19.50	22.30
15	21.00	23.80

Ordering Information

G WZD124-XX XX A 001 B X Z X
No. of Pins per Row 02~15
Standard Plating 22=Matte Tin
Selective Plating 01=Tin 02=Gold Flash
Color 1=Black 2=White
Standard Packing D=Tapel&Reel Selective Packing B=Tray



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1
3RD. ANG PROJ. PAGE. 1/1

GENERAL TOLERANCE

X.±3.0'	X.±/
.X'±2.0'	.X±0.30
.XX'±1.5'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.





GWZD124-CA1BZ

PART NO.

GWZD124-XXXXA001BXZX

TITLE.

1.50mm Pitch 90° Wafer

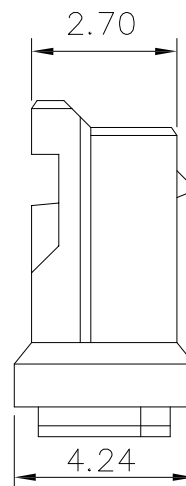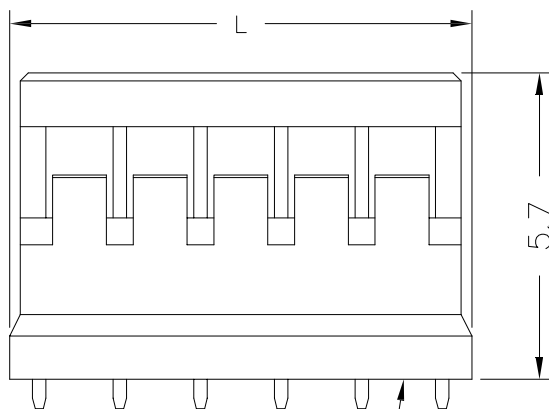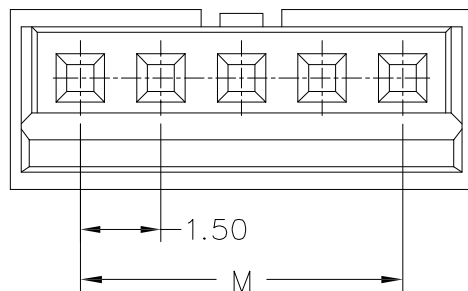

Circuit 1

NOTES:

CURRENT RATING: 3A AC/DC.
VOLTAGE RATING: 350V AC/DC
TEMPERATURE RANGE: -25℃ ~ +85℃
CONTACT RESISTANCE: 20mΩ Max.
INSULATION RESISTANCE: 1000MΩ Min.
WITHSTANDING VOLTAGE: 500V AC/MINUTE.
MATERIAL: PA66 UL94V-0

No. of Pin/Row	Dimensions	
	M	L
02	1.50	4.10
03	3.00	5.60
04	4.50	7.10
05	6.00	8.60
06	7.50	10.10
07	9.00	11.60
08	10.50	13.10
09	12.00	14.60
10	13.50	16.10
11	15.00	17.60
12	16.50	19.10
13	18.00	20.60
14	19.50	22.10
15	21.00	23.60

GWZ121 - XX

A


X

No. of Pin/Row
02 ~ 15

Material/Color
M=Nylon66/White
M1=Nylon66/Black



3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.停 /	X.?
.X.停 /	.X?.25
.XX.停 /	.XX?.20
.XXX.停 /	.XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWZ121-HA

PART NO.




GWZ121-XXAX

TITLE.

1.50mm Pitch Housing

Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

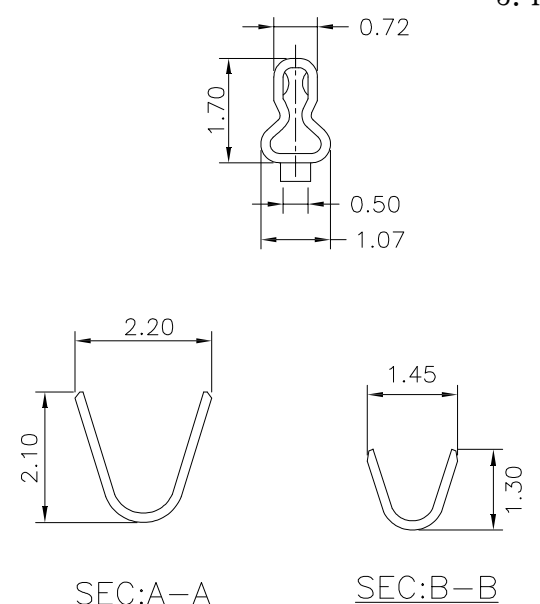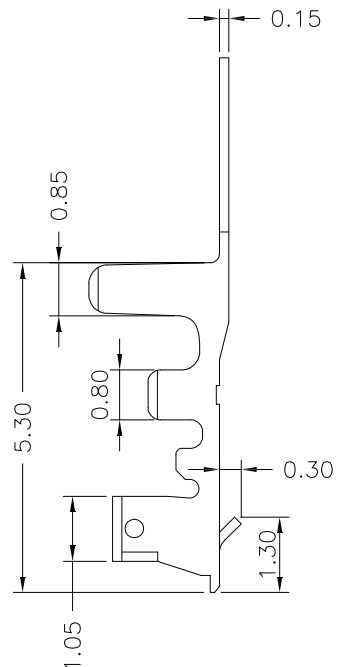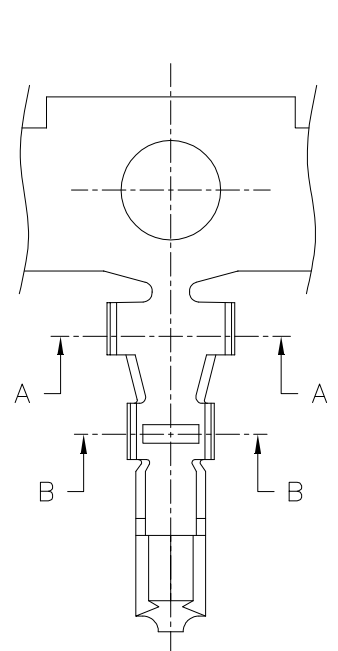

Note:
1. Material: PHOSPHOR BRONZE
2. Wire Range: AWG#24-28
3. Insulation O.D.: 1.1mm(Max)

Ordering Information

GRZ1A4 - 01 XX AB

Standard Plating
01= Tin
02= Gold Flash

Materials
AB= Phosphor bronze

 Website: www.greenconn.com E-mail: sales@greenconn.com			3RD. ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GRZ1A4-T1	TITLE. MX1.50mm Pitch Terminal
REV.	UNIT.	SCALE.		X. 停 /	X. ?				
A	mm	1:1	PAGE. 1/1	.X 停 /	.X?.25	CHECKED:	DATE:	PART NO.	
				.XX 停 /	.XX?.20	APPROVED:	DATE:	GRZ1A4-01 XX AB	
				.XXX 停 /	.XXX?. 15				