
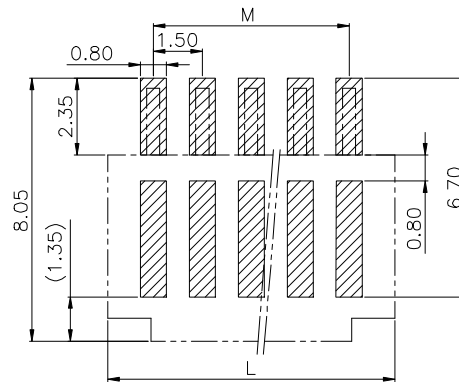
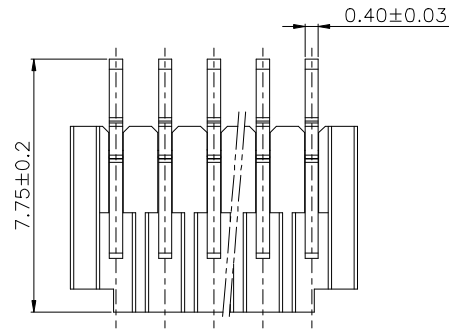

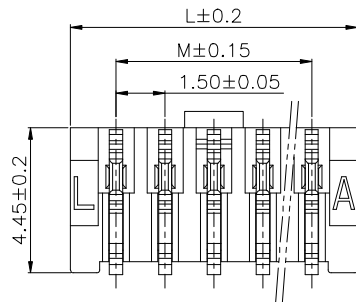


Specifications

Current Rating:3.0A AC DC
Voltage Rating:350V AC DC
Insulation Resistance:1000MΩ Min.
Dielectric Withstanding Voltage:500V AC/minute
Contact Resistance:20mΩ Max.
Operating Temperature:-25°C to +85°C
Materials
Contact Material: Phosphor Bronze
Insulator Material:UL 94V-0,LCP
All materials must meet Greenconn hazardous substances control standards.



PIN.	M	L	L1
2pin	1.50	4.30	3.70
3pin	3.00	5.80	5.20
4pin	4.50	7.30	6.70
5pin	6.00	8.80	8.20
6pin	7.50	10.30	9.70
7pin	9.00	11.80	11.20
8pin	10.50	13.30	12.70
9pin	12.00	14.80	14.20
10pin	13.50	16.30	15.70
11pin	15.00	17.80	17.20
12pin	16.50	19.30	18.70
13pin	18.00	20.80	20.20
14pin	19.50	22.30	21.70
15pin	21.00	23.80	23.20

Ordering Information

GWZD131 - XX XX A 001 C X A X
 No. Of Pins Per Row 02~15 Standard Plating 01=Tin Color 2=White Standard Packing D=Tape&Reel



REV. A UNIT. mm SCALE. 1:1

3RD.ANG PROJ.
 PAGE. 1/1

GENERAL TOLERANCE

X.±5°	X.±0.50
.X'±2°	.X±0.30
.XX'±1°	.XX±0.20
.XXX'±/'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWZD131-CA001CA

PART NO.

GWZD131-XXXXA001CXAX

TITLE.

1.50mm PITCH
90°WAFER SMT TYPE

F

E

D

C

B

A

F








E

D






C

B

A

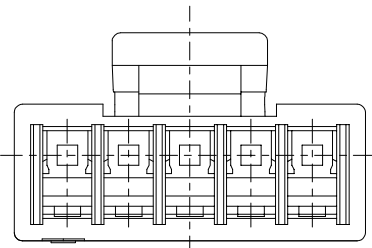

SCALE:1/2

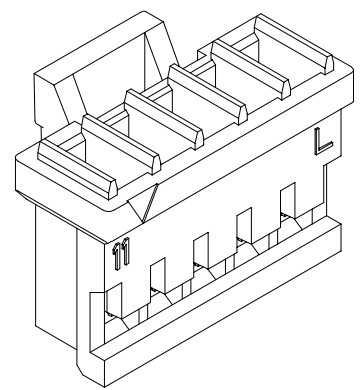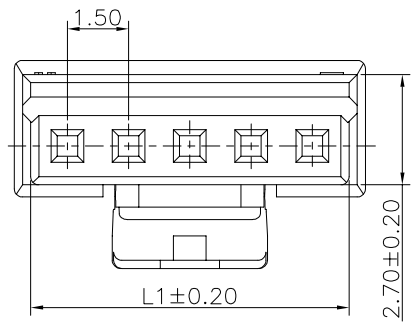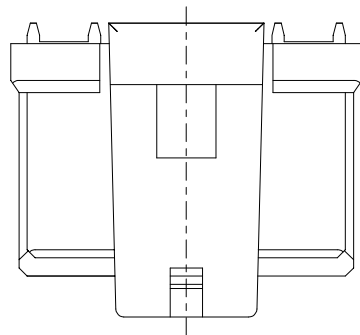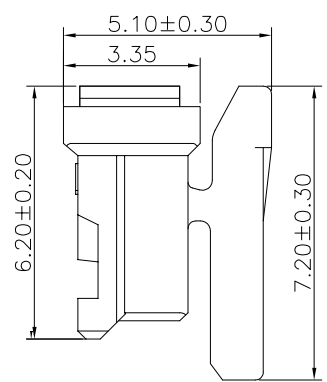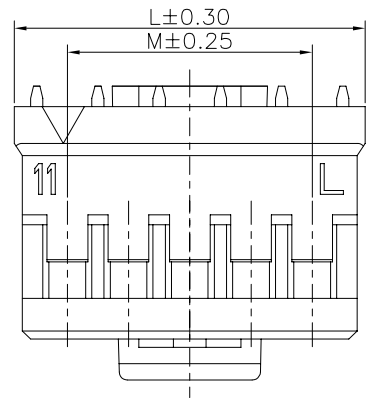

Specifications
Current Rating: 3.0A AC
Current Voltage: 250V AC
Insulation Resistance: ≥500MΩ
Dielectric Withstanding Voltage: 1000VAC
Contact Resistance: ≤20mΩ
Operating Temperature: -25°C to +85°C
Materials
Insulator Material: Nylon-66, UL 94V-0
Mating Terminal: GRZ1C5-T1
All materials must meet Greenconn hazardous substances control standards.

No. of Pins/Row	Dimensions Information		
	M	L	L1
02	1.50	4.10	3.30
03	3.00	5.60	4.80
04	4.50	7.10	6.30
05	6.00	8.60	7.80
06	7.50	10.10	9.30
07	9.00	11.60	10.80
08	10.50	13.10	12.30
09	12.00	14.60	13.80
10	13.50	16.10	15.30
11	15.00	17.60	16.80
12	16.50	19.10	18.30
13	18.00	20.60	19.80
14	19.50	22.10	21.30
15	21.00	23.60	22.80

Ordering Information

GHZ051 - XX A XX

No. of Pins Per Row
02~15

Materials /Color
V=Nylon66/Beige







3RD.ANG PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5°	X.±0.50
.X*±2°	.X±0.30
.XX*±1°	.XX±0.20
.XXX*±/°	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	GHZ051-HA
PART NO.	GHZ051-XXAXX

TITLE.
1.00mm PITCH Housing

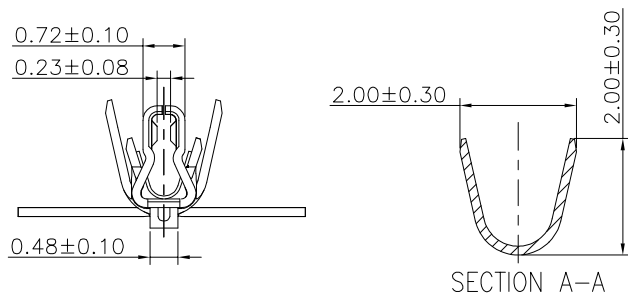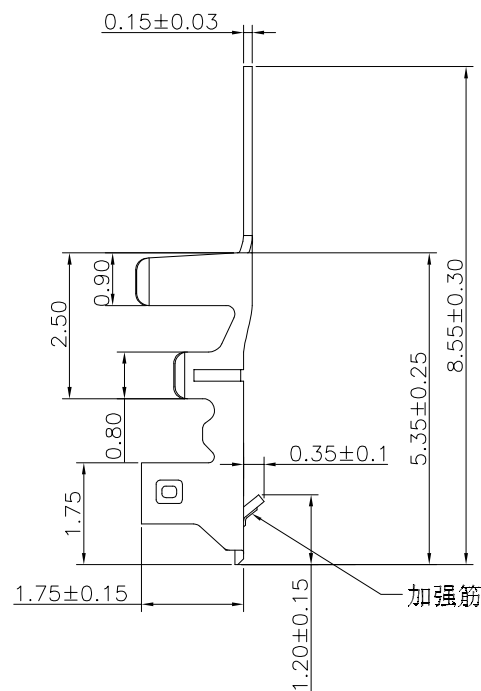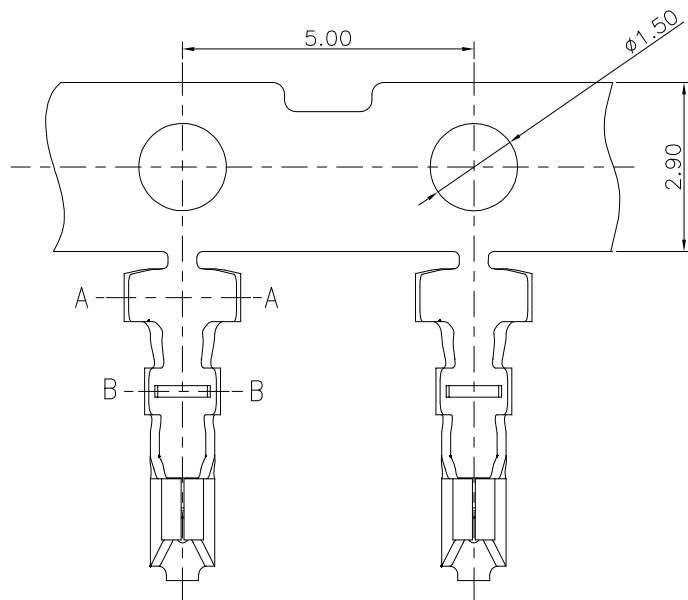


Specifications

Current Rating: 3.0A
Current Voltage: 250V
Contact Resistance: $\leq 20\text{m}\Omega$
Operating Temperature: -25°C to $+85^{\circ}\text{C}$
Wire Rang: AWG#24~#26
Insulation O.D. : 0.95~1.20mm.

Materials

Terminal Material: Phosphor Bronze
Mating Housing: GHZ051-HA
All materials must meet Greenconn hazardous substances control standards.

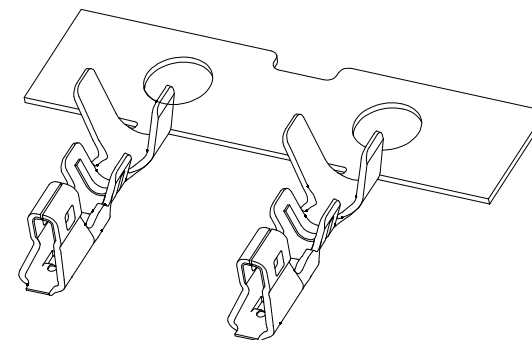

Ordering Information


GRZ1C5 - 01 XX XX
Standard Plating 01=Tin
Materials AB=Phosphor bronze
.....



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.* $\pm 5^{\circ}$	X. ± 0.50
.X.* $\pm 2^{\circ}$	.X. ± 0.30
.XX.* $\pm 1^{\circ}$	.XX. ± 0.20
.XXX.* $\pm /$	.XXX. $\pm /$

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GRZ1C5-T1

PART NO.

GRZ1C5-01XXAB

TITLE.

1.00mm PITCH Housing