
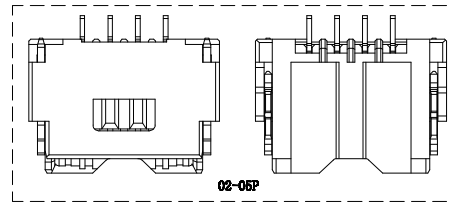




1 2 3 4 5 6 7 8 9

F


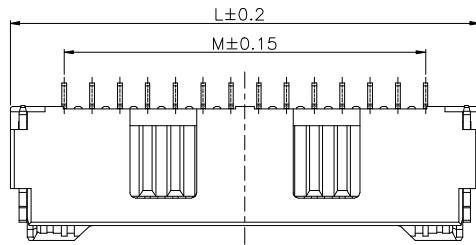


Specifications
 Current Rating:2.0A AC DC(AWG#24)
 Voltage Rating:100V AC DC
 Insulation Resistance:500MΩ Min.
 Dielectric Withstanding Voltage:500V AC/minute
 Contact Resistance:20mΩ Max.
 Operating Temperature:−40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material:UL 94V−0,LCP
 Solder Tabs: Brass
 All materials must meet Greenconn hazardous substances control standards.

E

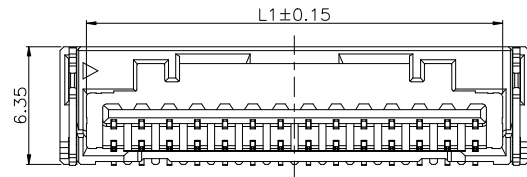


D

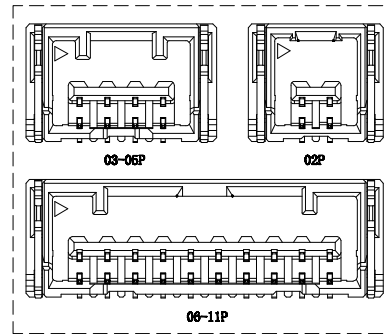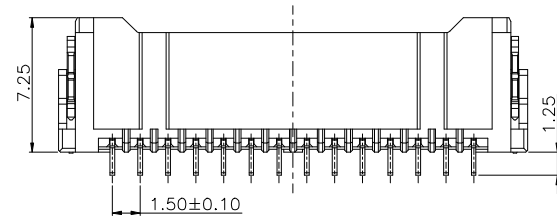

PIN.	L	M	L1	PIN.	L	M	L1
2P	7.30	1.50	4.45	9P	17.80	12.00	14.95
3P	8.80	3.00	5.95	10P	19.30	13.50	16.45
4P	10.3	4.50	7.45	11P	20.80	15.00	17.95
5P	11.8	6.00	8.95	12P	22.30	16.50	19.45
6P	13.3	7.50	10.45	13P	23.80	18.00	20.95
7P	14.80	9.00	11.95	14P	25.30	19.50	22.45
8P	16.30	10.50	13.45	15P	26.80	21.00	23.95

C

B

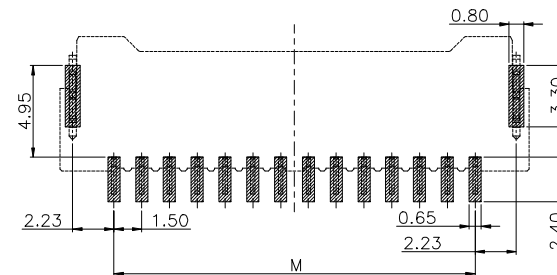

PCB LAYOUT

Ordering Information

GWZD132 - XX XX A 001 C X A X
 No. Of Pins Per Row 02~15 Standard Plating 01=Tin Color 2=White Standard Packing D=Tape&Reel

A



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1
 3RD.ANG PROJ. PAGE. 1/1

GENERAL TOLERANCE

X.±5°	X.±0.50
.X'±2°	.X±0.30
.XX'±1°	.XX±0.20
.XXX'±/'	.XXX±/

DESIGNED:

DATE:

DWG. NO.

GWZD132-CA001CA

TITLE.

1.50mm PITCH
 90°WAFER SMT TYPE

CHECKED:

DATE:

PART NO.

GWZD132-XXXXA001CXAX

APPROVED:

DATE:

AQ 1 2 3 4 5 6 7 8 9

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F



E

D




C

B

A

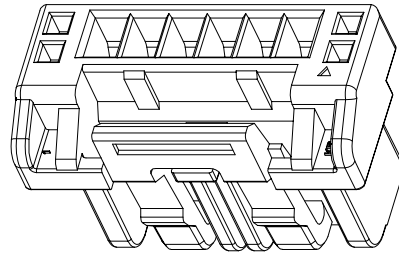

Specifications
Current Rating: 1.0A AC
Current Voltage: 100V AC
Dielectric Withstanding Voltage: 500VAC
Insulation Resistance: $\geq 500M\Omega$
Contact Resistance: $\leq 20m\Omega$
Operating Temperature: $-25^{\circ}C$ to $+85^{\circ}C$
Materials
Insulation Material: PBT, UL94V-0
Mating Housing: GRZ1C6-T1
All materials must meet Greenconn hazardous substances control standards.

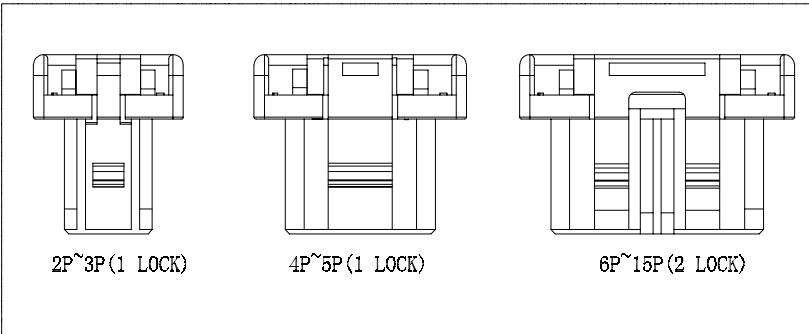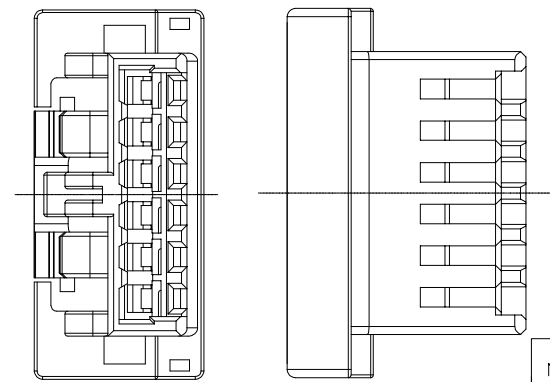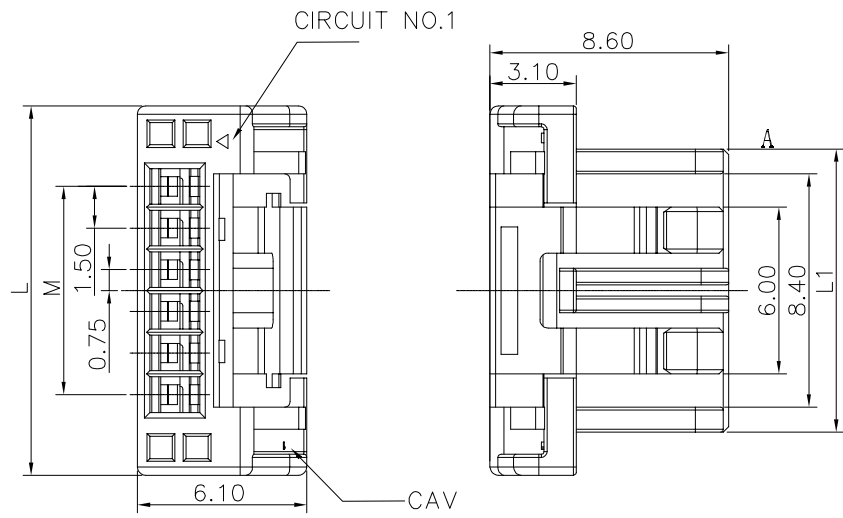

Ordering Information

GHZ161 - XX A XX
No. of Pins Per Row 02~15
Materials /Color A4=PBT/White


No. of Pins/Row	Dimensions Information		
	L	M	L1
02	7.30	1.50	4.20
03	8.80	3.00	5.70
04	10.30	4.50	7.20
05	11.80	6.00	8.70
06	13.30	7.50	10.20
07	14.80	9.00	11.70
08	16.30	10.50	13.20
09	17.80	12.00	14.70
10	19.30	13.50	16.20
11	20.80	15.00	17.70
12	22.30	16.50	19.20
13	23.80	18.00	20.70
14	25.30	19.50	22.20
15	26.80	21.00	23.70



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG PROJ.



PAGE. 1/1


GENERAL TOLERANCE	
X.* $\pm 5^{\circ}$	X. ± 0.50
.X.* $\pm 2^{\circ}$	.X. ± 0.30
.XX.* $\pm 1^{\circ}$	.XX. ± 0.20
.XXX.* $\pm /$	.XXX. $\pm /$

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	GHZ161-HA
PART NO.	GHZ161-XXAXX

TITLE.	1.50mm PITCH Housing
--------	----------------------

AQ 1 2 3 4 5 6 7 8 9

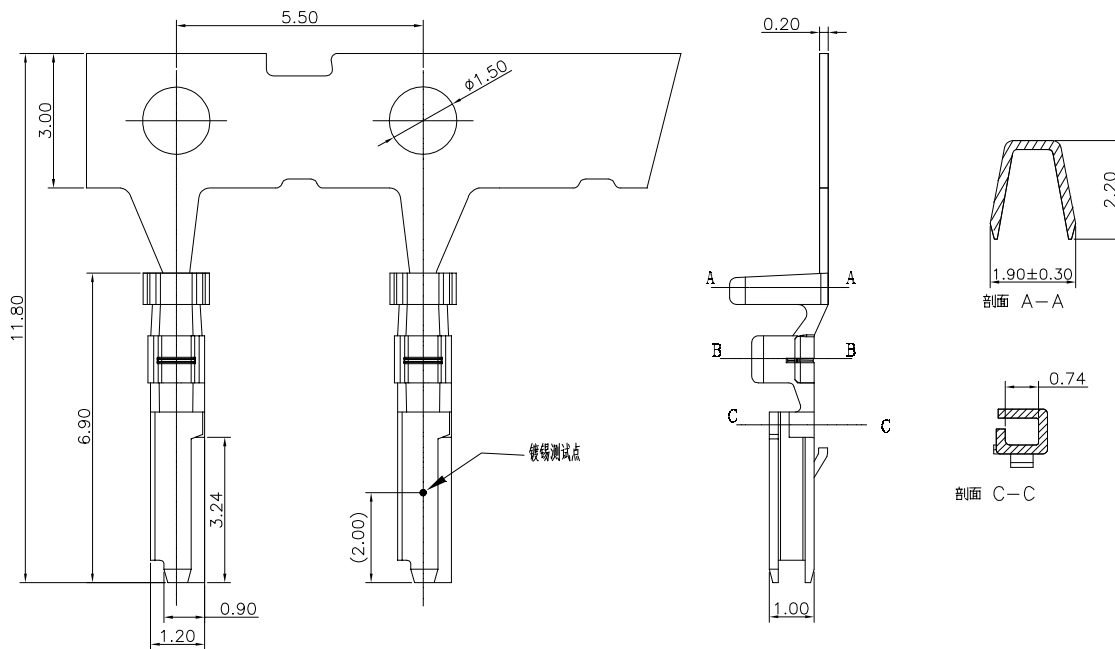


Specifications

Current Rating: 1.0A AC
Current Voltage: 100V AC
Contact Resistance: $\leq 20\text{m}\Omega$
Operating Temperature: -25°C to $+85^{\circ}\text{C}$
Wire Rang: AWG#24~#28
Insulation O.D. : 1.28mm(Max).

Materials

Terminal Material: Phosphor Bronze
Mating Terminal: GHZ161-HA
All materials must meet Greenconn hazardous substances control standards.

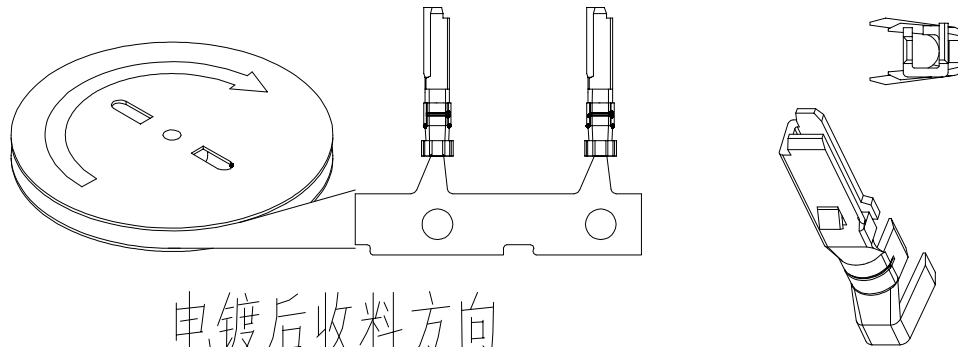

电镀后收料方向

Ordering Information


GRZ1C6 - 01 XX XX
Standard Plating 01=Tin
Materials AB=Phosphor bronze
.....



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.* $\pm 5^{\circ}$	X. ± 0.50
.X.* $\pm 2^{\circ}$	.X. ± 0.30
.XX.* $\pm 1^{\circ}$	.XX. ± 0.20
.XXX.* $\pm /$	.XXX. $\pm /$

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GRZ1C6-T1

PART NO.

GRZ1C6-01XXAB

TITLE.

1.50mm PITCH Terminal