

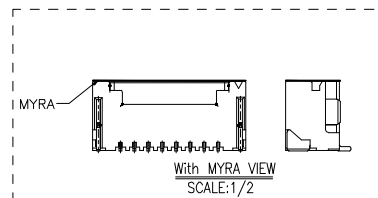
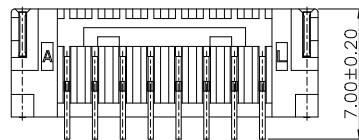



PCB LAYOUT(Tolerance:±0.05)

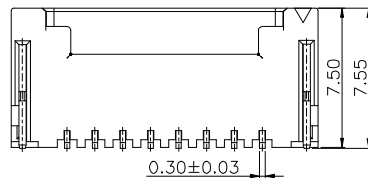

Specifications

Current Rating:2.0A AC DC

Voltage Rating:100V AC DC

Insulation Resistance:500MΩ Min.

Dielectric Withstanding Voltage:500V AC/minute

Contact Resistance:20mΩ Max.

Operating Temperature:-25°C to +85°C

Materials


Contact Material: Phosphor Bronze

Insulator Material:Nylon-9T,UL 94V-0

Solder Tabs: Brass

All materials must meet Greenconn hazardous substances control standards.

PIN.	M	L	PIN.	M	L
2pin	1.50	7.50	10pin	13.50	19.50
3pin	3.00	9.00	11pin	15.00	21.00
4pin	4.50	10.50	12pin	16.50	22.50
5pin	6.00	12.00	13pin	18.00	24.00
6pin	7.50	13.50	14pin	19.50	25.50
7pin	9.00	15.00	15pin	21.00	27.00
8pin	10.50	16.50	16pin	22.50	28.50
9pin	12.00	18.00			

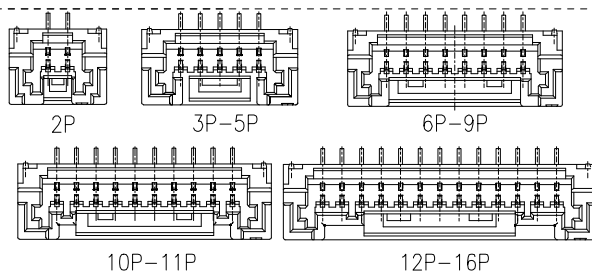

Ordering Information

GWZD133 - XX XX A 001 D X A X

No. Of Pins Per Row 02~16 Standard Plating 01=Tin Color 2=White Standard Packing D=Tape&Reel



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 3RD.ANG PROJ. PAGE. 1/1

GENERAL TOLERANCE

X.±5°	X.±0.50
.X'±2°	.X±0.30
.XX'±1°	.XX±0.20
.XXX'±/'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GWZD133-CA001DA

PART NO.

GWZD133-XXXXA001DXAX

TITLE.

1.50mm PITCH
180° SMT WAFER

F

E

D

C

B

A

F

E

D

C

B



A

Specifications
Current Rating: 2.0A AC
Current Voltage: 100V AC
Dielectric Withstanding Voltage: 500VAC
Insulation Resistance: $\geq 500M\Omega$
Contact Resistance: $\leq 20m\Omega$
Operating Temperature: $-25^{\circ}C$ to $+85^{\circ}C$
Materials
Insulation Material: Nylon-66, UL94V-0
Mating Housing: GRZ1C7-T1
All materials must meet Greenconn hazardous substances control standards.





No. of Pins/Row	Dimension Information			
	M	L	L1	L2
02	1.50	5.00	3.60	2.70
03	3.00	6.30	5.10	3.45
04	4.50	7.80	6.60	4.45
05	6.00	9.30	8.10	4.45
06	7.50	10.80	9.60	7.45
07	9.00	12.30	11.10	7.45
08	10.50	13.80	12.60	9.80
09	12.00	15.30	14.10	9.80
10	13.50	16.80	15.60	9.80
11	15.00	18.30	17.10	9.80
12	16.50	19.80	18.60	9.80
13	18.00	21.30	20.10	11.30
14	19.50	22.80	21.60	11.30
15	21.00	24.30	23.10	11.30
16	21.00	25.80	24.60	11.30

Ordering Information

GHZ181 - XX A XX
No. of Pins Per Row 02-16 Materials /Color M=Nylon-66/White

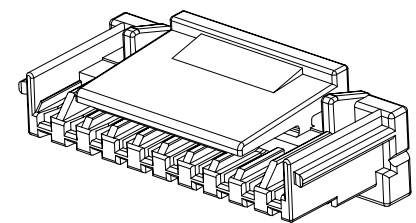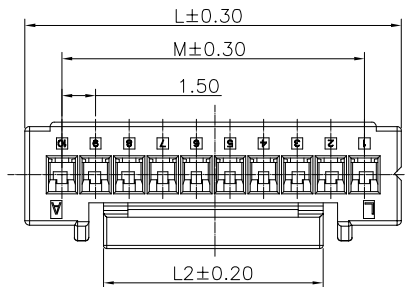


10P以下
无此凸台

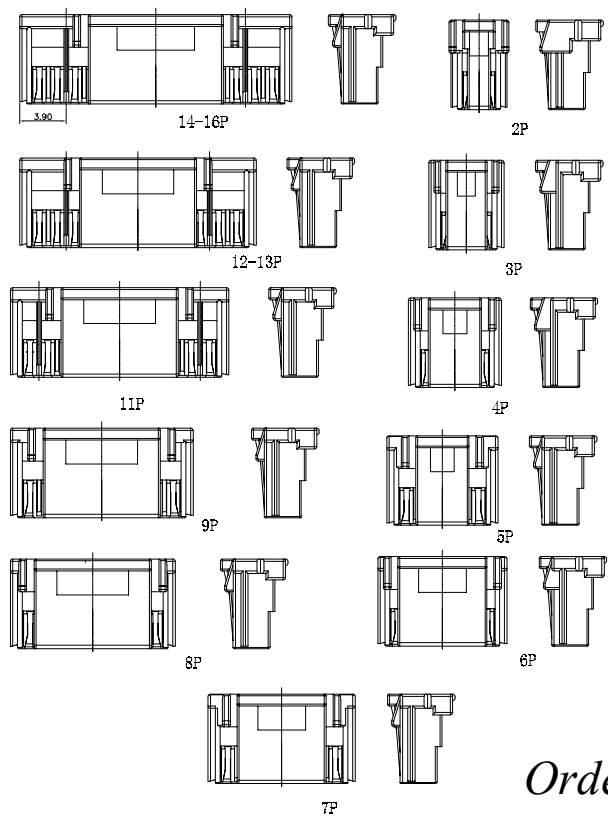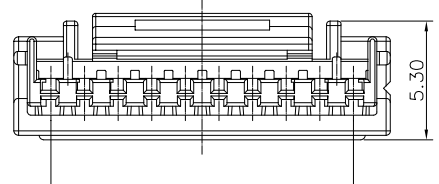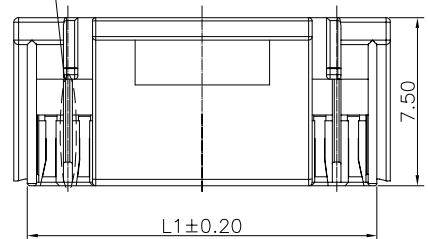



Website: www.greenconn.com
E-mail: sales@greenconn.com

3RD.ANG
PROJ.

PAGE. 1/1

GENERAL TOLERANCE	
X.*±5*	X.±0.50
.X*±2*	.X±0.30
.XX*±1*	.XX±0.20
.XXX*±/*	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
GHZ181-HA
PART NO.
GHZ181-XXAXX

TITLE.
1.50mm PITCH Housing

AQ

1 2 3 4 5 6 7 8 9

1

2

3

4

5

6

7

8

9

F

E

D

C

B

A

F






E

D

C

B

A

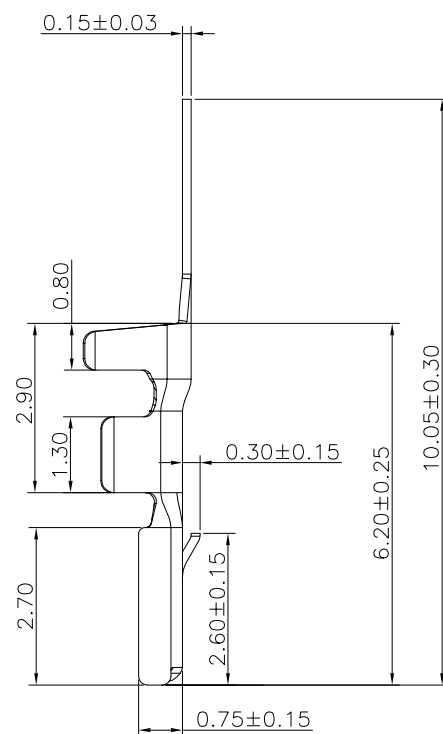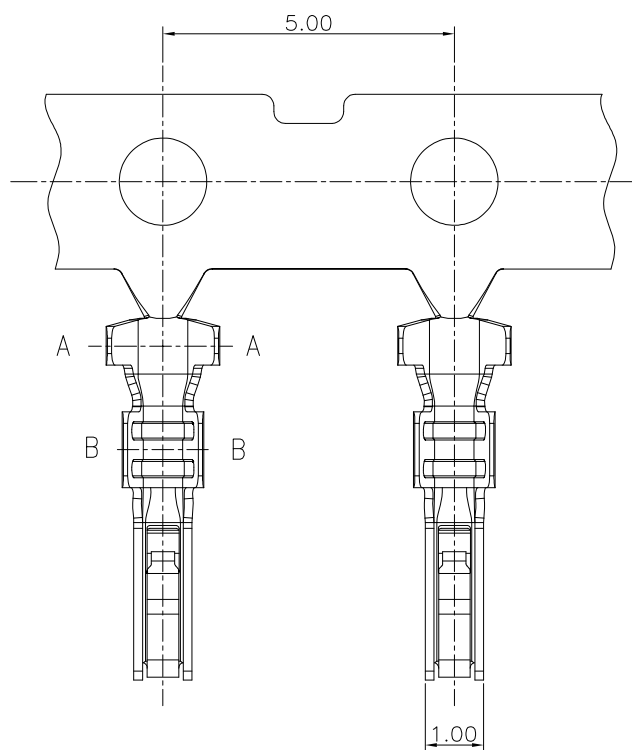

SECTION A-A

Ordering Information

GRZ1C7 - 01 XX

XX

Standard Plating
01=TinMaterials
AB=Phosphor bronze

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG PROJ.	PAGE.
	1/1

GENERAL TOLERANCE	
X.*±5°	X.±0.50
.X*±2°	.X±0.30
.XX*±1°	.XX±0.20
.XXX*±/°	.XXX±/

DESIGNED:	DATE:

CHECKED:	DATE:

DWG. NO.
GRZ1C7-T1

PART NO.
GRZ1C7-01XXAB

TITLE.
1.50mm PITCH Terminal

AQ

1

2

3

4

5

6

7

8

9