


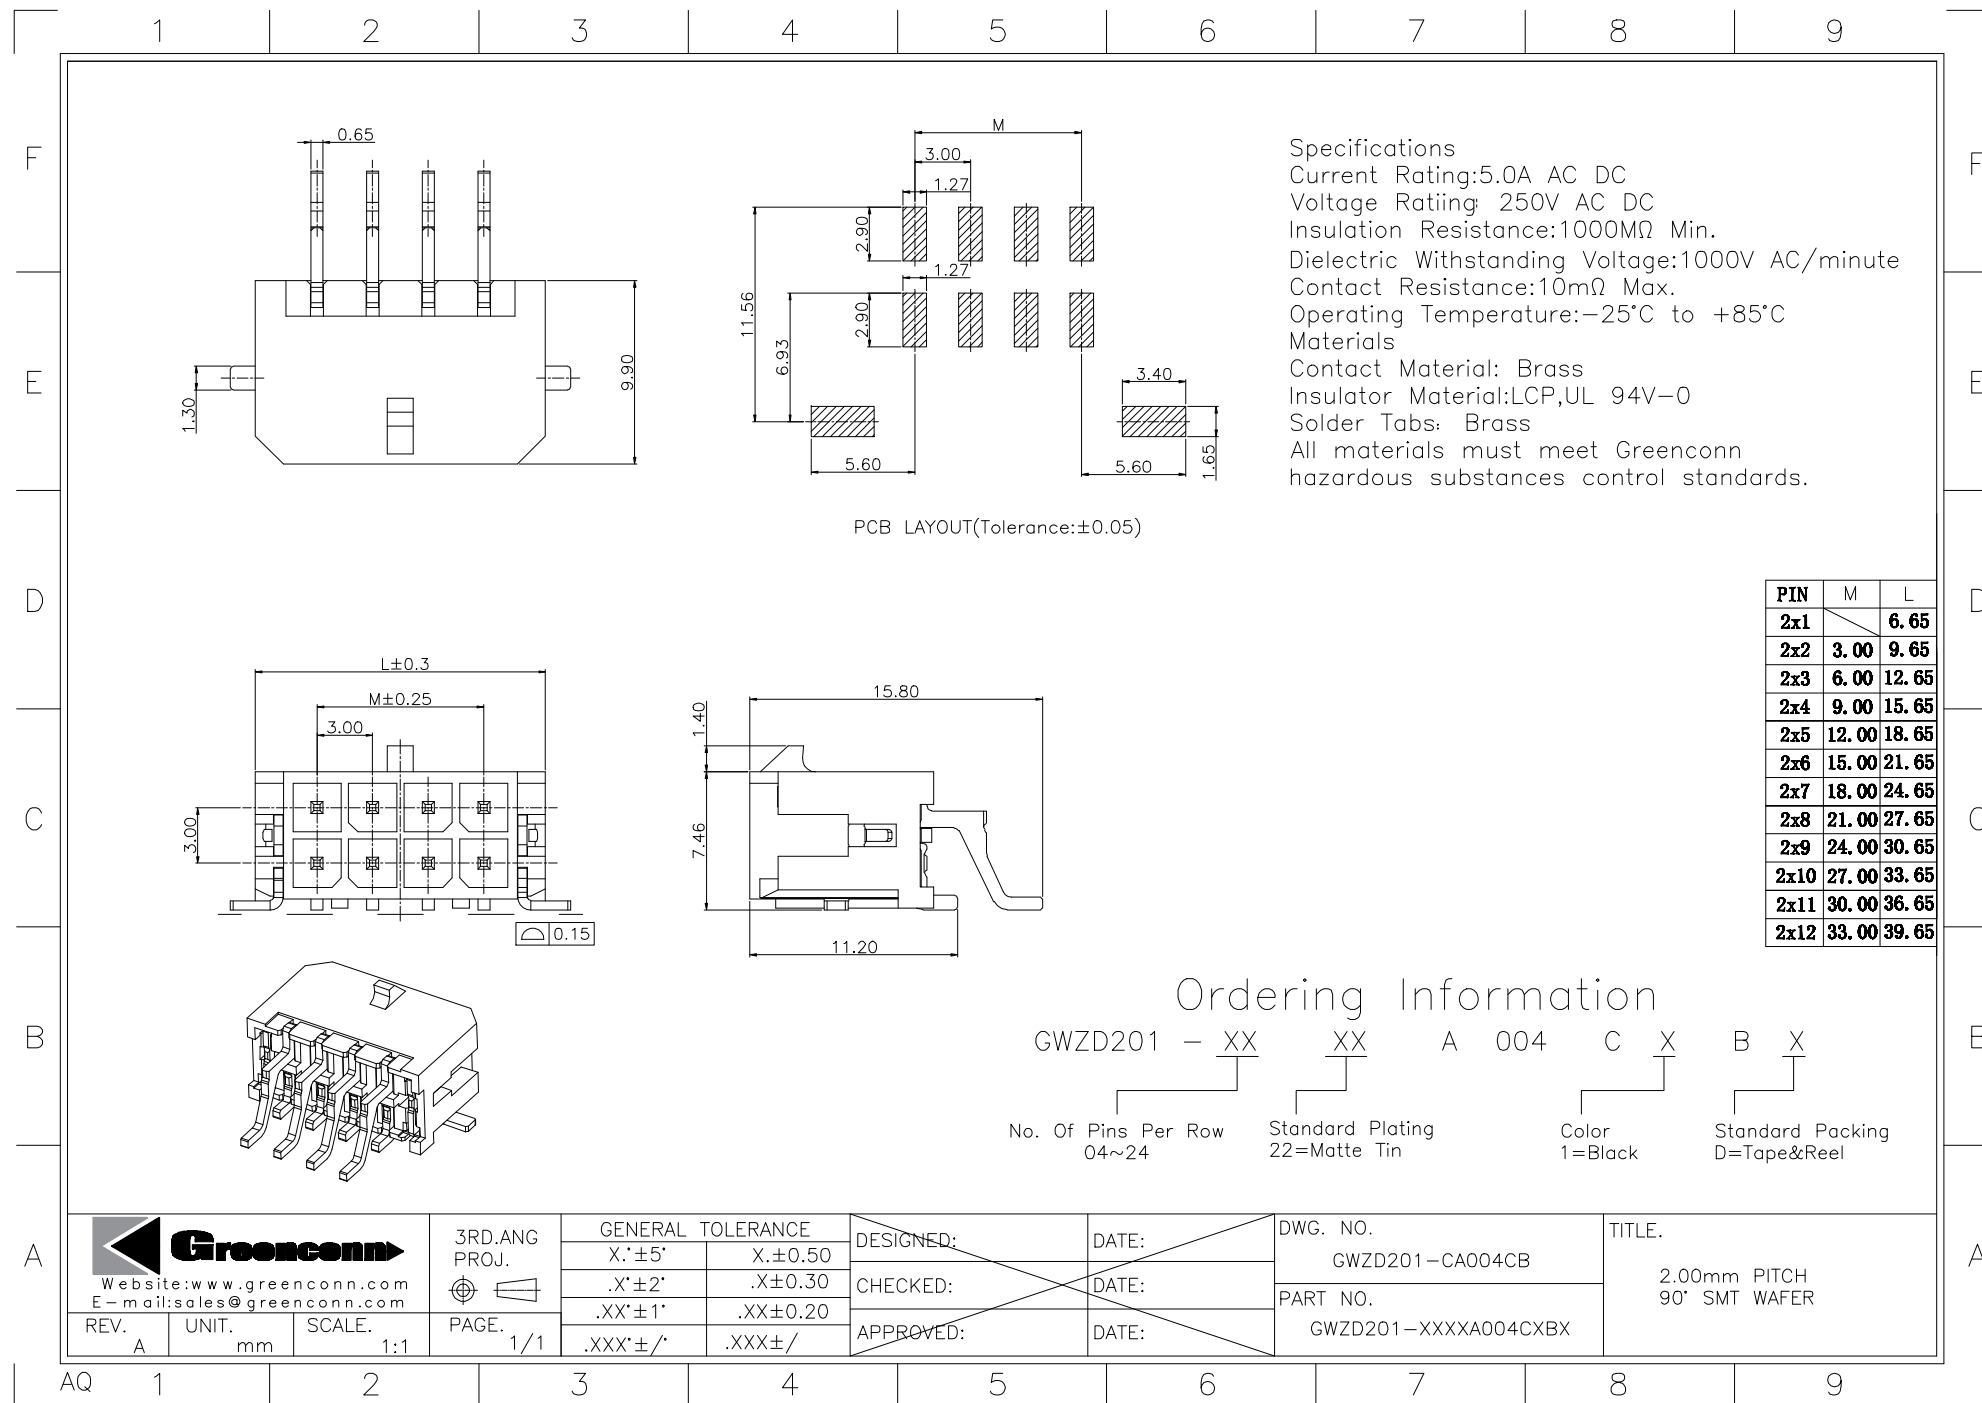

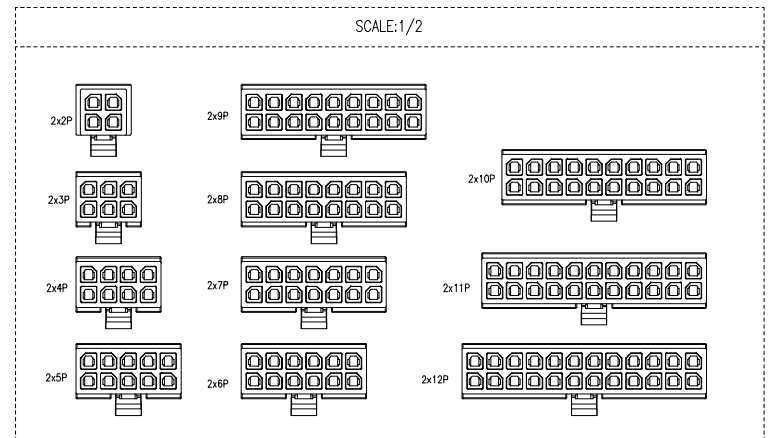








Specifications
 Current Rating: 5.0A AC DC
 Current Voltage: 250V AC DC
 Dielectric Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: $\geq 100M\Omega$
 Contact Resistance: $\leq 20m\Omega$
 Operating Temperature: $-40^{\circ}C$ to $+105^{\circ}C$
 Materials
 Insulation Material: PA66, UL94V-0
 Mating With:
 Terminal: GRZ1C3-T1
 Wafer: GWZC201-A005/GWZD201-A004
 All materials must meet Greenconn hazardous substances control standards.



Ordering Information
 GHZ242 - XX A XX
 No. of Pins Per Row 02~12 Materials /Color M1=Nylon66/Black

No. of Pins/Row	Dimensions Information	
	L	M
02	6.90	3.00
03	9.90	6.00
04	12.90	9.00
05	15.90	12.00
06	18.90	15.00
07	21.90	18.00
08	24.90	21.00
09	27.90	24.00
10	30.90	27.00
11	33.90	30.00
12	36.90	33.00



REV. 01 UNIT. mm SCALE. 1:1

3RD.ANG PROJ.
 PAGE. 1/1

GENERAL TOLERANCE	
X.'±3.0'	X.±0.50
.X'±2.0'	.X±0.30
.XX'±1.0'	.XX±0.20
.XXX'±0.5'	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. GHZ242-HA
 PART NO. GHZ242-XXAXX

TITLE.
 3.00mm PITCH Housing

