

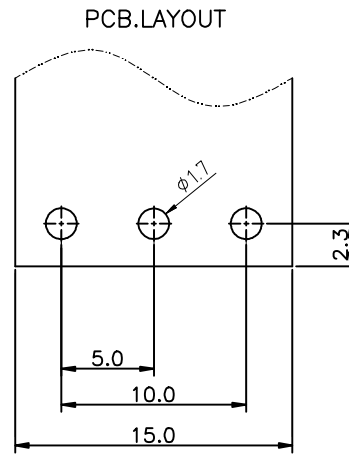
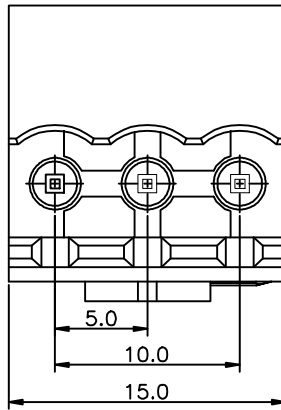


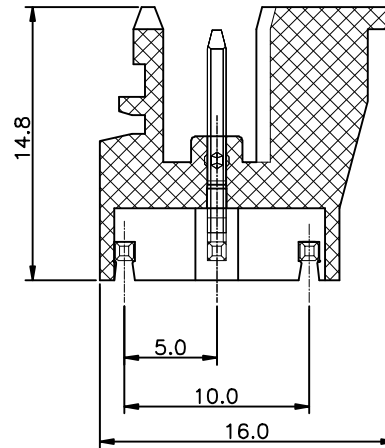

Specifications
 Voltage rating:300VAC
 Current rating: 16A
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: AC 2500V(1min)
 Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN hazardous substances control standards.



Ordering Information

G XLB105 - XX XX A 001 E X B X

No. of Pins per Row 03 Standard Plating 01=Tin Color 1=Black 3=Yellow 7=Blue G=Green Standard Packing R=Carton



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
 PROJ.

GENERAL TOLERANCE

X.±1.0'	X.±0.50
.X'±	.X±0.30
.XX'±	.XX±0.20
.XXX'±	.XXX±

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GXLB105-CA001EB

PART NO.

GXLB105-XXXX A001EXBX

TITLE.

Pitch 5.0mm 03Pole right