

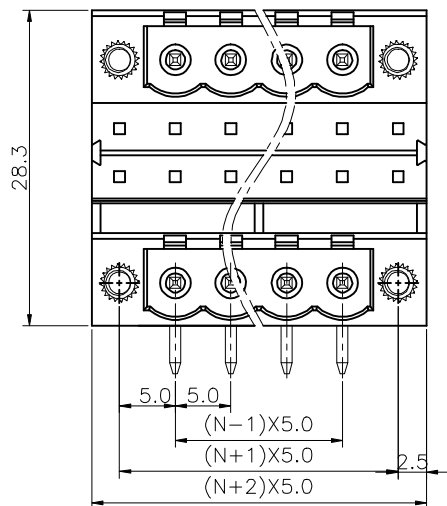
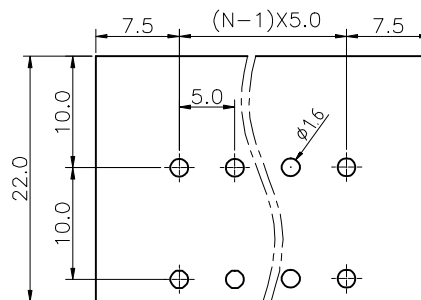


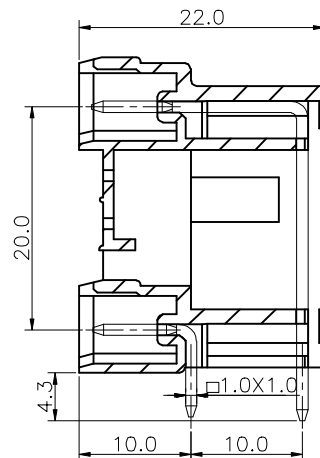

N=Number of contacts



PCB LAYOUT(± 0.05)

Specifications
 Voltage rating:300VAC
 Current rating:16 Amps/way max
 Contact resistance: 20m Ω (max)
 Insulation resistance: 5000M Ω /1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: /
 Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information


G XLB202 - XX XX A 001 E X Z X
 No. of Pins per Row 02~24 Standard Plating 01=Tin Color 1=Black 7=Blue G=Green Standard Packing R=Carton



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
 PROJ.



GENERAL TOLERANCE

X. $\pm 5.0^{\circ}$ X. ± 0.50
 .X. $\pm 3.0^{\circ}$.X. ± 0.30
 .XX $\pm 2.0^{\circ}$.XX ± 0.20
 .XXX $\pm 1.0^{\circ}$.XXX $\pm$

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GXLB202-CA1EZ

PART NO.

GXLB202-XXXXA001EXZX

TITLE.

Pitch 5.0mm Series