

1 2 3 4 5 6 7 8 9

F


E

D


C

B



A

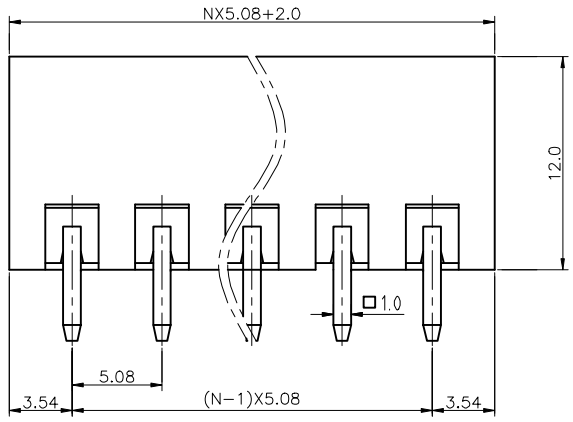

N=Number of contacts

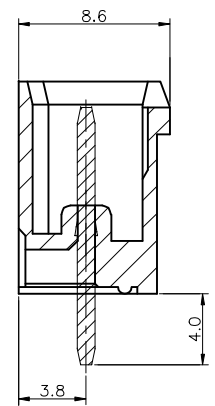

Specifications
 Voltage rating:300VAC
 Current rating:16 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: /
 Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

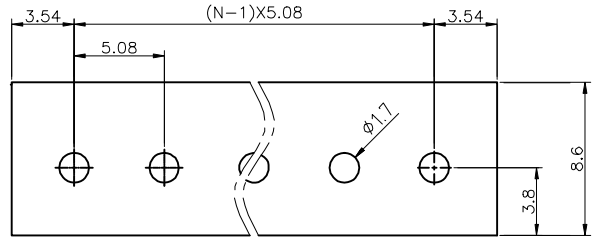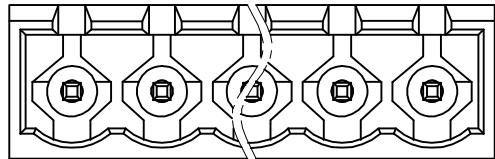

PCB LAYOUT(±0.05)

Ordering Information



Greenconn
 Website:www.greenconn.com
 E-mail:sales@greenconn.com

3RD.ANG PROJ. 	GENERAL TOLERANCE	
	X:±5.0'	X.±0.50
	.X'±3.0'	.X±0.30
	.XX'±2.0'	.XX±0.20
PAGE. 1/1	.XXX'±1.0'	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. GXMA101-CA002
PART NO. GXMA101-XXXXA002EXZX

TITLE.
Pitch 5.08mm DIP Series

REV. A	UNIT. mm	SCALE. 1:1
--------	----------	------------

1 2 3 4 5 6 7 8 9