

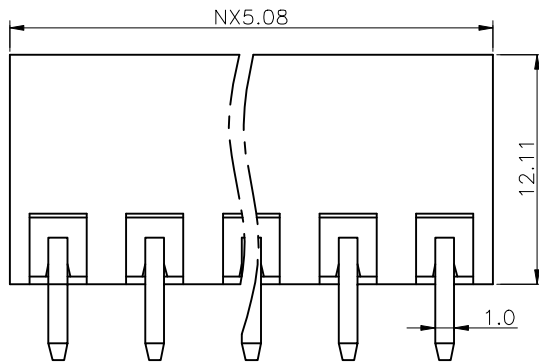
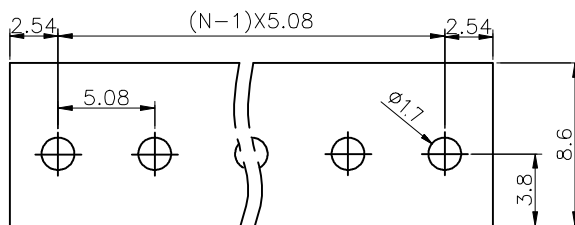


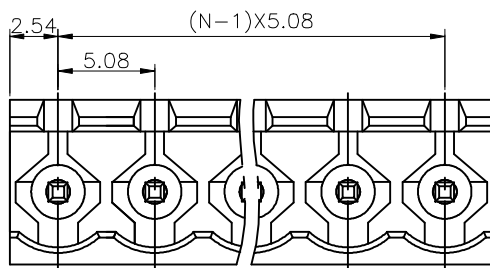

N=Number of contacts

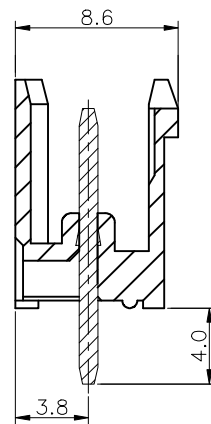

P C B Layout(± 0.05)

Specifications
 Voltage rating:300VAC
 Current rating:16 Amps/way max
 Contact resistance: 20m Ω (max)
 Insulation resistance: 5000M Ω /1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: /
Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information

G XMA101 - XX XX A 003 E X Z X

No. of Pins per Row
02~24

Standard Plating
01=Tin

Color
1=Black
7=Blue
G=Green

Standard Packing
R=Carton
Selective Packing
.....



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1



GENERAL TOLERANCE

X. $\pm 5.0^{\circ}$	X. ± 0.50
.X $\pm 3.0^{\circ}$	.X ± 0.30
.XX $\pm 2.0^{\circ}$	.XX ± 0.20
.XXX $\pm 1.0^{\circ}$	.XXX $\pm$

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

GXMA101-CA3EZ

PART NO.

GXMA101-XXXXA003EXZX

TITLE.

Pitch 5.08mm DIP Series