
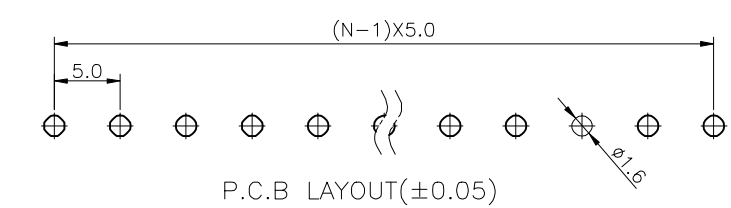
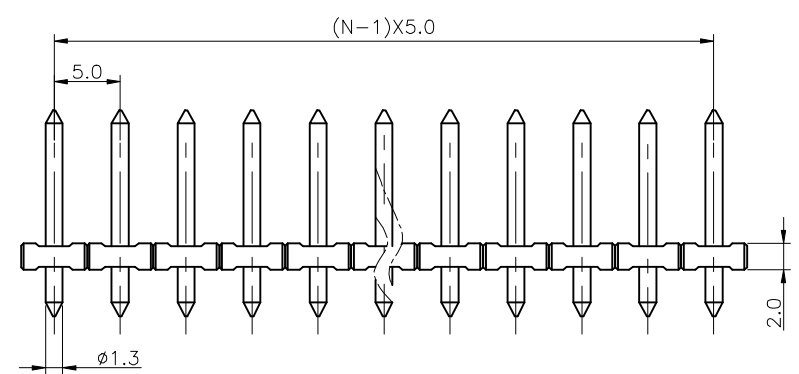


1 2 3 4 5 6 7 8 9

F  
E  
D  
C  
B  
A

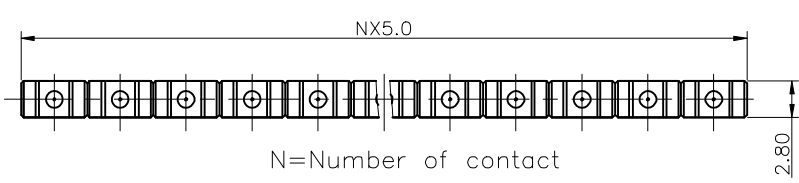

**Specifications**  
 Voltage rating:300VAC  
 Current rating:10 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding Voltage: 2500VAC(1min)  
 Test time:60sec/1pcs  
 wire range: /  
**Mechanical:**  
 Torque:/  
 Operating temperature:-40°C to+105°C  
**Materials**  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN  
 hazardous substances control standards.

### Ordering Information

G XMA103 - XX XX A 001 E X Z X

No. of Pins per Row 02~24      Standard Plating 01=Tin .....

Color 1=Black 6=Grey 7=Blue G=Green      Standard Packing R=Carton

**Greenconn**  
 Website:www.greenconn.com  
 E-mail:sales@greenconn.com

REV. A    UNIT. mm    SCALE. 1:1

3RD.ANG PROJ.  
  
 PAGE. 1/1

GENERAL TOLERANCE	
X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.  
GXMA103-CA1EZ

PART NO.  
GXMA103-XXXXA001EXZX

TITLE.  
pitch 5.0mm Vertical Series

1 2 3 4 5 6 7 8 9