



1 2 3 4 5 6 7 8 9


F

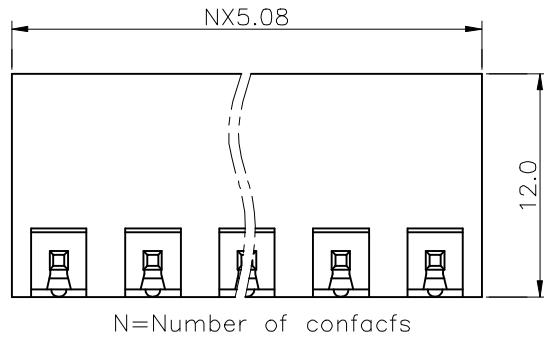


Specifications
 Voltage rating:300VAC
 Current rating:16 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: /
 Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

E

D

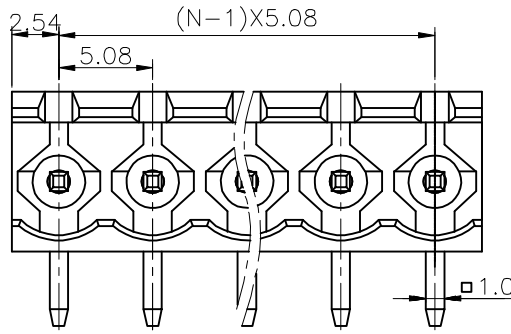

C

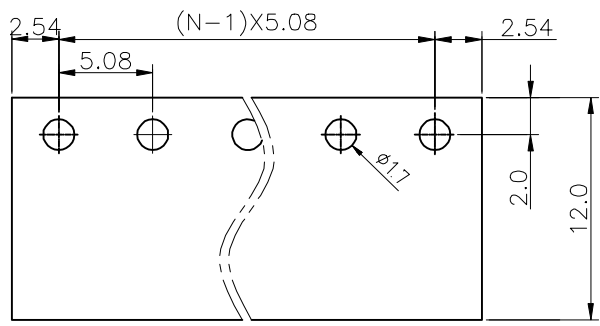

B

Ordering Information

G XMB103 - XX XX A 002 E X Z X

No. of Pins per Row 02~24 Standard Plating 01=Tin Color 1=Black 7=Blue G=Green Standard Packing R=Carton

A

 Website:www.greenconn.com E-mail:sales@greenconn.com	3RD.ANG PROJ. 	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GXMB103-CA2EZ	TITLE. Pitch 5.08-Series
		X:±5.0'	X.±0.50				
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	.X'±3.0'	.X±0.30	PART NO. GXMB103-XXXXA002EXZX	
				.XX'±2.0'	.XX±0.20		
				.XXX'±1.0'	.XXX±/		
				APPROVED:	DATE:		

1 2 3 4 5 6 7 8 9